


D-SUB Male Dual Row IDC Inner Button Type(stamped Pin)

ROHS COMPLIANT

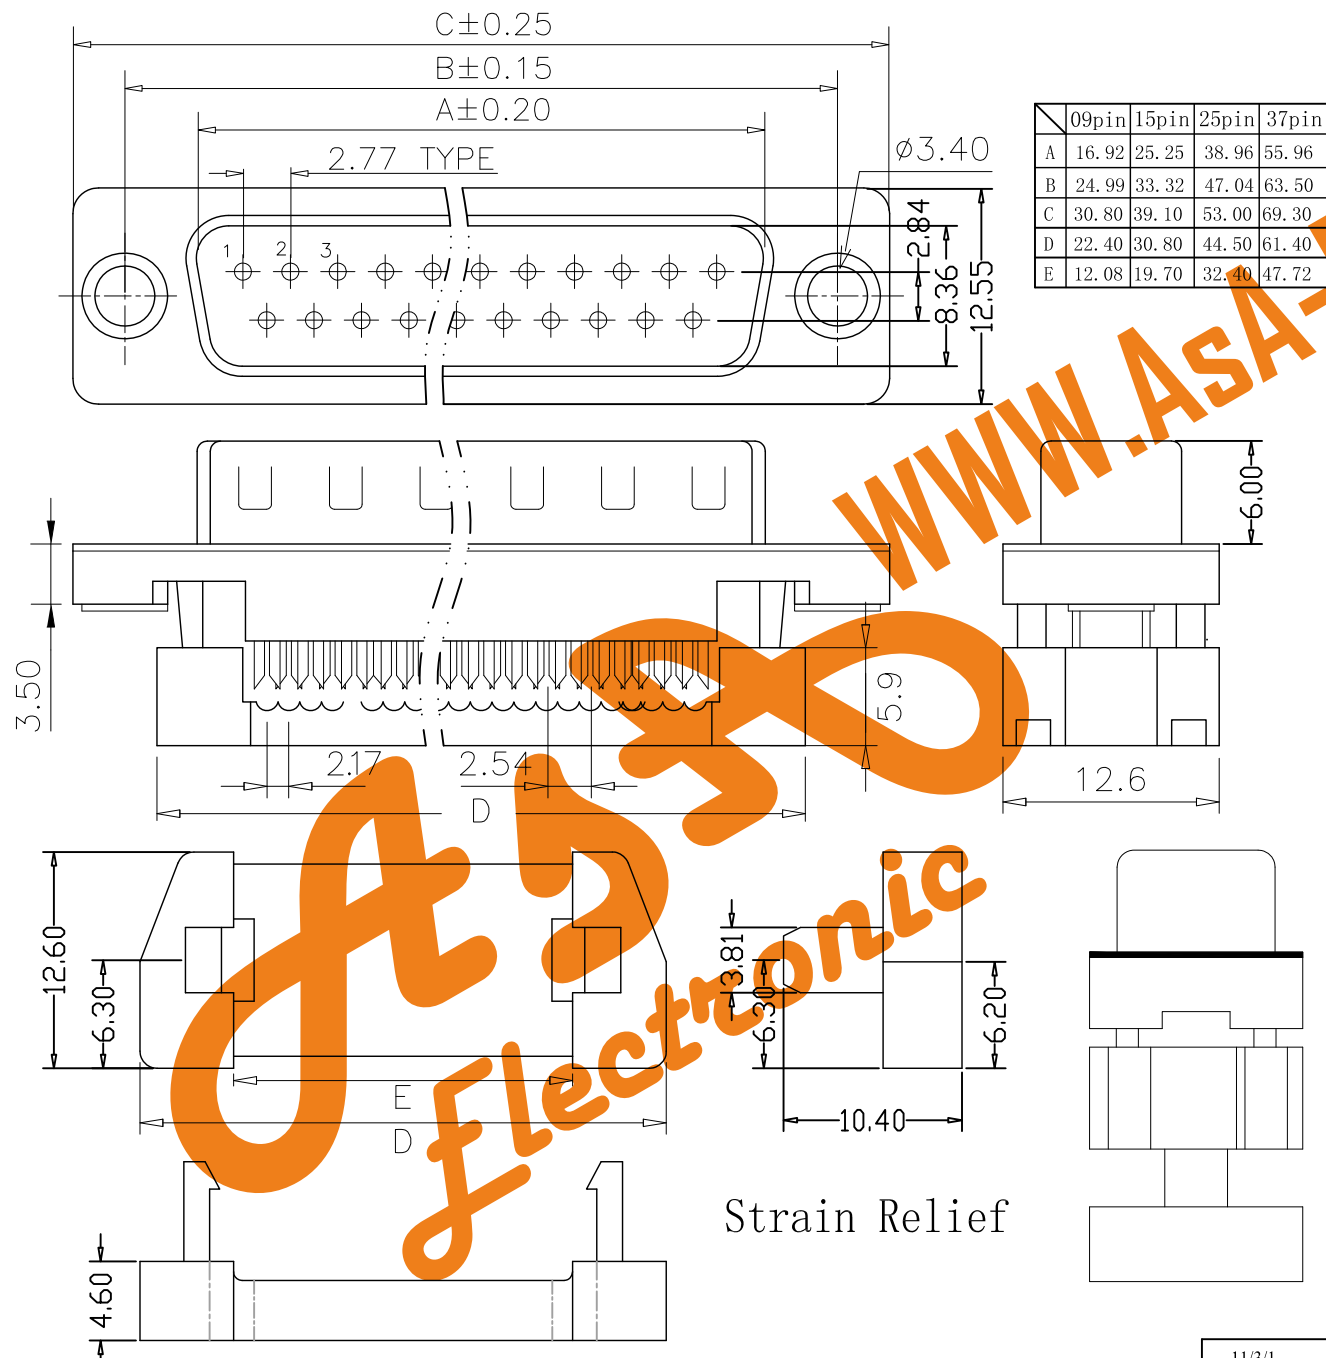

	09pin	15pin	25pin	37pin
A	16.92	25.25	38.96	55.96
B	24.99	33.32	47.04	63.50
C	30.80	39.10	53.00	69.30
D	22.40	30.80	44.50	61.40
E	12.08	19.70	32.40	47.72

Material (材料):
 Housing (塑胶): Temperature Thermoplastics, PBT+G.F UL 94V-0
 Contact (端子): Brass or Bronze
 Shell (壳): 0.35T Steel Nickel Plating All Area

Electical Characteristics (电气性能):
 Current Rating (额定电流): 5A
 Contact Resistance (接触阻抗): 20 milliohms Max
 Withstanding Voltage (耐电压): 500V AC For 1 Minute
 Insulation Resistance (绝缘阻抗): 1000 Megohms Min
 Operating Temperature: (温度范围): -55° C to +105° C

Ordering Code:

DIDC01 - M - X - S - X - X
 ① ② ③ ④ ⑤ ⑥

- ① Dual Row IDC Type
- ② Contact Type:
M: Male
- ③ Contact NO.:
09=09pin
15=15pin
25=25pin
37=37pin
- ④ Contact Plating
S: Selective Gold
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
- ⑤ Color Code:
L: Blue
B: Black
- ⑥ Other Option:
A: With S/R (Standard)
B: Without S/R

Strain Relief

Unless Otherwise specified tolerance X±0.35 X.X±0.25 X.XX±0.20 X.XXX±0.15		 ASA Electronic Co. WWW.ASA-Elec.com Tel: (+98) 21 66 73 56 82 Mob: (+98) 912 03 161 02
SCALE: 1:1	UNIT: mm	
DRAWN: junfon H		TITLE: D-SUB Male Dual Row IDC Inner Button Type(stamped Pin)
CHECKED: YANG		DRAWING NO: DIDC01-MXXXX
11/3/1	DATE	PRODUCT NO: DIDC01-MXXXX

