

DIN 41612 Vertical Female Type IDC Connector 3Row

ROHS COMPLIANT




SPECIFICATION

Current Rating: 3.0Amp
 Insulation Resistance: 1000MΩ min.
 Contact Resistance: 30MΩ max
 Withstand Voltage: AC 1000V For 1 Minute
 Operating Temperature: -55° C to +105° C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PBT+30%GF UL 94V-0

Ordering Code:

DID - XX - X - X - X - 3R
 ① ② ③ ④ ⑤

- ① Series No:
- ② No. of Contacts
16P 32P 64P
- ③ Rows Loaded With Contacts
A: Row a
K: Row a+d
D: Row a+c
- ④ Plastic length
1: 3x16p
2: 3x32p
- ⑤ Contact Plating
G0: Gold flash
S0: Gold flash/Ni
G1: 3u" Gold
S1: 3u" Gold/Ni
G2: 5u" Gold
S2: 5u" Gold/Ni
G3: 10u" Gold
S3: 10u" Gold/Ni
G4: 15u" Gold
S4: 15u" Gold/Ni
G5: 30u" Gold
S5: 30u" Gold/Ni
SN: Tin

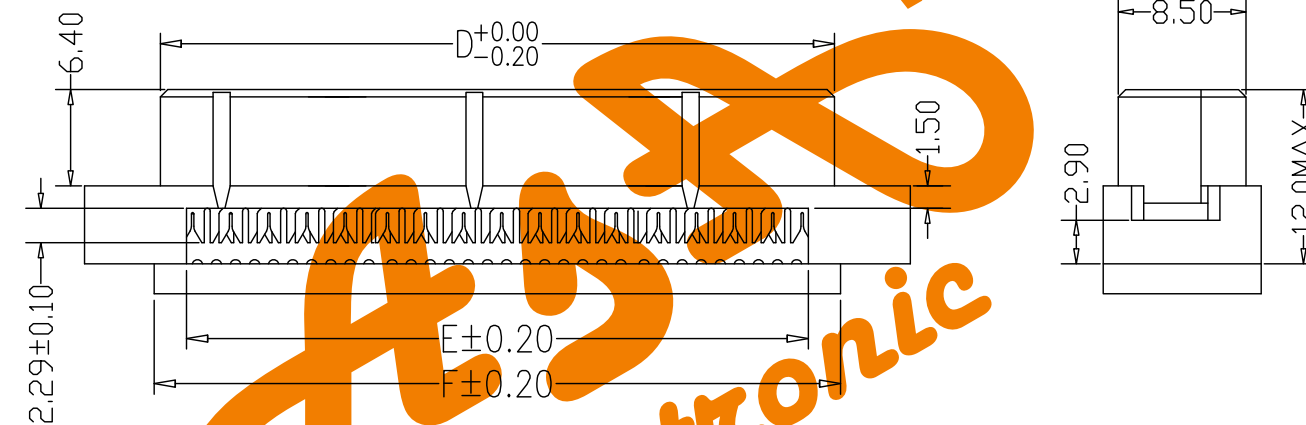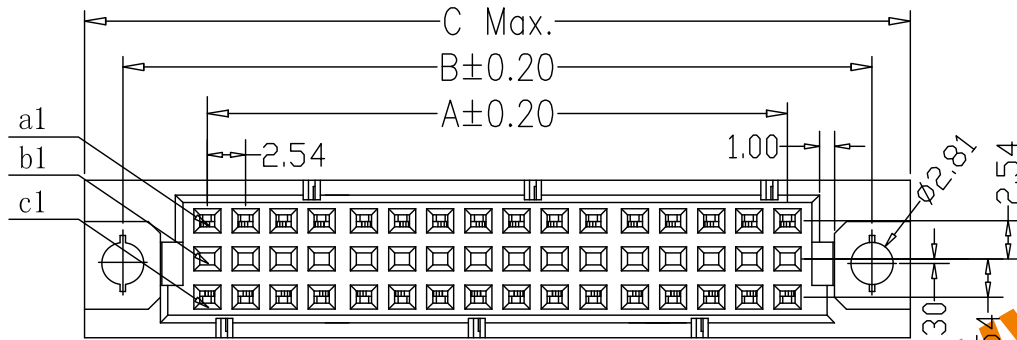

No. of Pins	A	B	C	D	E	F
1 3X16P	38.10	49.90	55.00	44.40	41.00	44.00
2 3X32P	78.74	90.00	95.10	85.00	81.50	85.80

Unless Otherwise specified tolerance
 X±0.35
 X.X±0.25
 X.XX±0.20
 X.XXX±0.15

AsA Electronic WWW.AsA-Elec.com
AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

SCALE: As Shown UNIT: mm
 DRAWN: jnufon
 CHECKED: Yan

TITLE:
 Vertical Female Type IDC Connector 3Row

APPROVED

DRAWING NO: DID-XX-XXX-3R

Add option of plating 10/8/1

DESCRIPTION DATE

PRODUCT NO: DID-XX-XXX-3R

