


D-SUB Male Three Row Solder Type (stamped Pin)

ROHS COMPLIANT

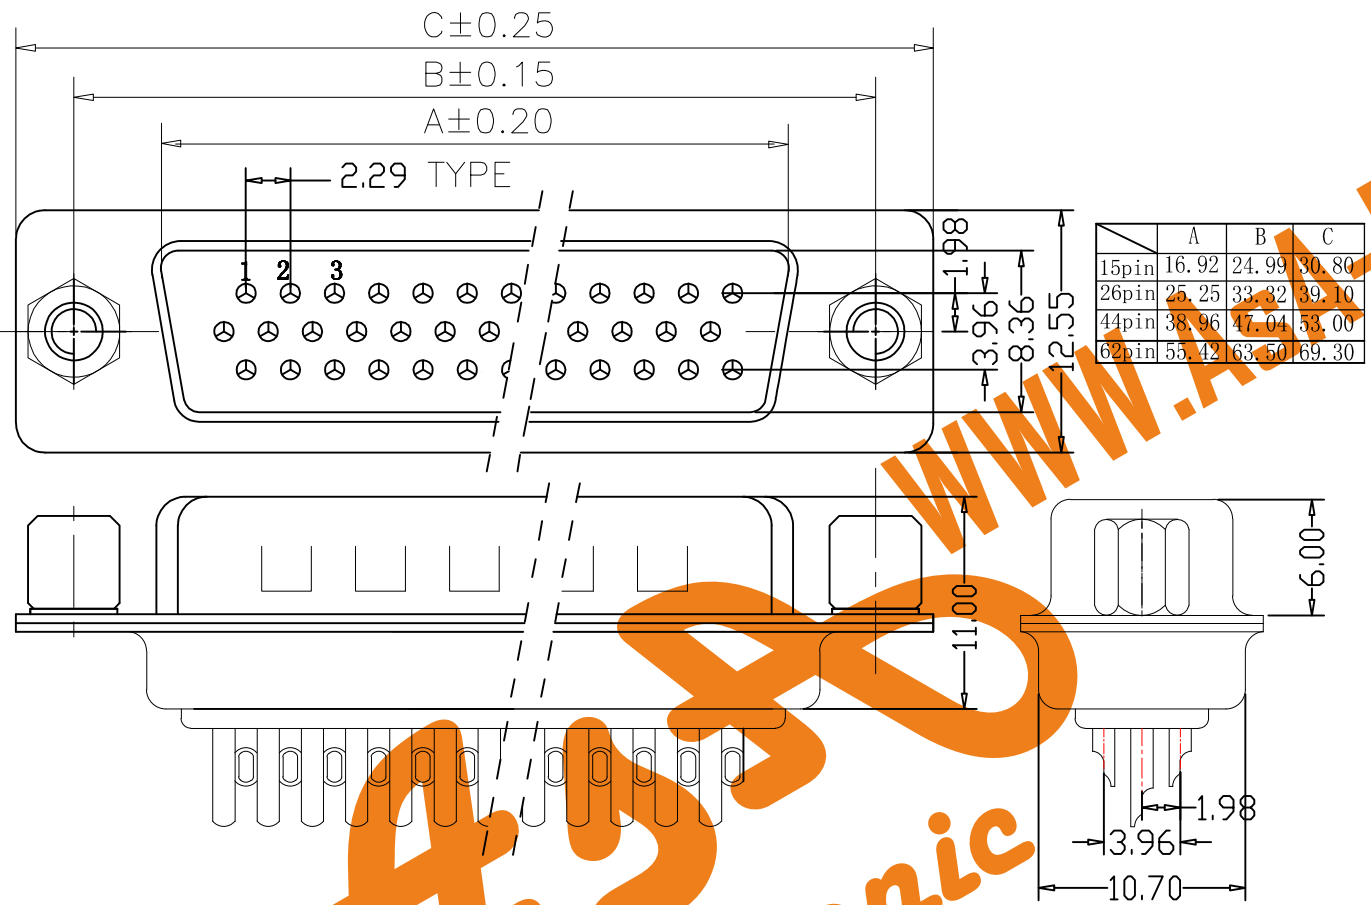

Material (材料):

Housing (塑胶): Temperature Thermoplastics, PBT+G.F UL 94V-0
 Contact (端子): Brass or Bronze
 Shell (壳): 0.35T Steel Nickel Plating All Area


Electical Characteristics (电气性能):

Current Rating (额定电流): 5A
 Contact Resistance (接触阻抗): 20 milliohms Max
 Withstanding Voltage (耐电压): 500V AC For 1 Minute
 Insulation Resistance (绝缘阻抗): 1000 Megohms Min
 Operating Temperature (温度范围): -55° C to +105° C

Ordering Code:

HDD01 - M - X - A - A - B - S
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Three Row Solder Type
- ② Contact Type:
M: Male
- ③ Contact NO. :
15=15pin 26=26pin
44=44pin 62=62pin
- ④ Mounting Option:
A: No accessories
B: Rear Rivet
C: Front Rivet
D: Groundstand-off on real shell
E: Front rivet+Groundstand-off on real shell
- ⑤ Accessories:
0: Non Accessories
A: Zinc alloy 4.8mm Nickel
A1: Zinc alloy 5.8mm Nickel
B: Iron 4.8mm Nickel
B1: Iron 5.8mm Nickel
C: Copper alloy 4.8mm Nickel
C1: Copper alloy 5.8mm Nickel
D: Copper screw 4.8mm Nickel
D1: Copper screw 5.8mm Nickel
- ⑥ Color Code:
W: White L: Blue
B: Black G: Grey
- ⑦ Contact Plating
S: Selective Gold
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold

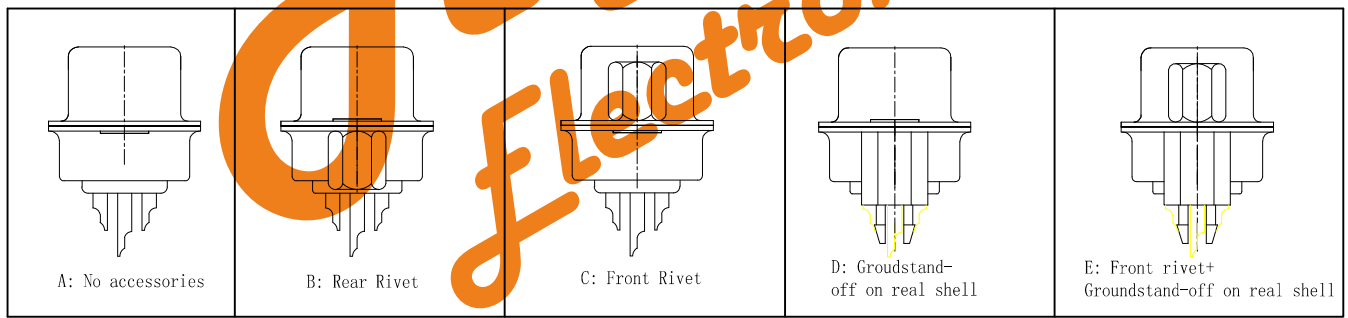

Unless Otherwise specified tolerance		 WWW.AsA-Elec.com AsA Electronic Co. Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02
X:±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15		
SCALE: 1:1	UNIT: mm	
DRAWN: junfon H		TITLE: D-SUB Male Three Row Solder Type (stamped Pin)
CHECKED: YANG		
 3rd ANGLE PROJECTION		DRAWING NO: HDD01-MXXXXX
		PRODUCT NO: HDD01-MXXXXX

REV	DESCRIPTION	DATE
1	Add option of plating	11/3/1