

ROHS COMPLIANT

MATERIALS AND FINISH

SHELL: steel material front shell nickel finished
 INSULATOR: PBT thermoplastic 30% glass
 filled UL 94V-0 rated pc99 color
 CONTACT MATERIAL: brass
 CONTACT FINISH: selective gold flash
 RIVITED INSERT: brass material nickel finished
 with #4-40 threaded riveted clinch nuts in back shell

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING: 5.0A
 CONTACT RESISTANCE: 30 milliohms max
 DIELECTRIC WITHSTANDING VOLTAGE: 500 V AC MIN
 INSULATION RESISTANCE: 1000 megohms min
 TEMPERATURE RATING: -55 +~105

Ordering Code:

HDD03 - F - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

① Three Row Solder Type

② Contact Type:
F: Female

③ Contact NO.:
104=104pin




④ Mounting Option:
A: No accessories
B: Rear Rivet
C: Front Rivet
D: Groundstand-off on rear shell
E: Front rivet+Groundstand-off on rear shell

⑤ Accessories:

O: Non Accessories
 A: Zinc alloy 4.8mm Nickel
 B: Iron 4.8mm Nickel
 B1: Iron 5.8mm Nickel
 C: Copper alloy 4.8mm Nickel
 C1: Copper alloy 5.8mm Nickel
 D: Copper screw 4.8mm Nickel
 D1: Copper screw 5.8mm Nickel

⑥ Color Code:
W: White L: Blue
B: Black G: Grey

⑦ Contact Plating
S: Selective Gold
G0: Gold flash G1 :3u" Gold
G2 :5u" Gold G3 :10u" Gold
G4 :15u" Gold G5 :30u" Gold

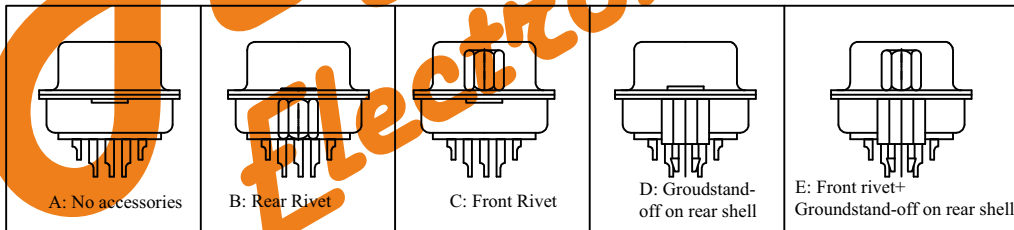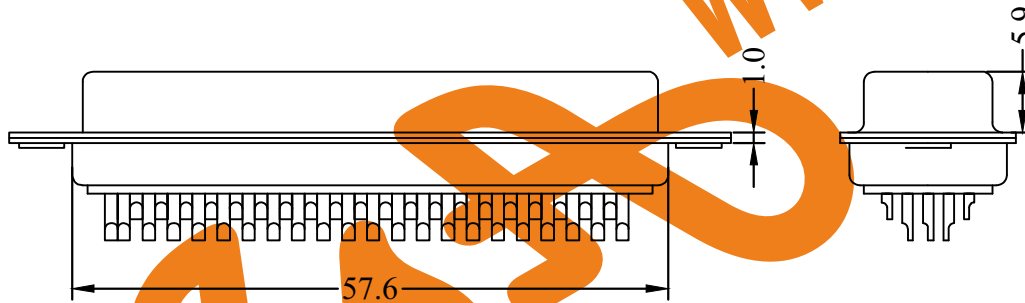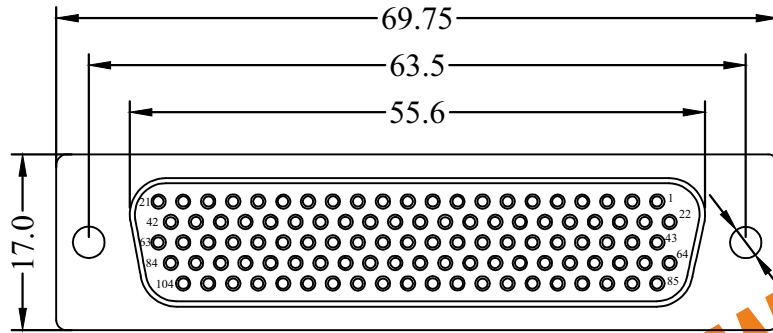

Unless Otherwise specified tolerance		 ASA Electronic Co. WWW.AsA-Elec.com Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02
SCALE: 1:1	UNIT: mm	
DRAWN: huangzhen		TITLE: D-SUB Female 5 row high density solder 104P(stamped pin)
CHECKED: YANG		DRAWING NO: HDD03-FXXXXX
		PRODUCT NO: HDD03-FXXXXX

REV	Add option of plating	13/12/19
	DESCRIPTION	DATE