

1.00mm Pin Header Dual Row SMT Type






SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHBM02 - X - X - D - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating: G0: Gold flash, G1: 3u" Gold, G2: 5u" Gold, G3: 10u" Gold, G4: 15u" Gold, G5: 30u" Gold, SN: Tin
- ④ Connector Type: D: Dual
- ⑤ Pin Length: A+C+D+(W-1.27)/2. Please mark the desired length in the A/D/W
- ⑥ Insulator Material: B: PA6T, C: LCP, D: PA46
- ⑦ Packing: A: Tray, B: Bag, T: Tube, U: Tube+CAP, R: Tape&Reel, W: Tape&Reel+CAP
- ⑧ Plastic High: A: 1.0mm, B: 1.5mm
- ⑨ Plastic Function: A: Type A, B: Type B

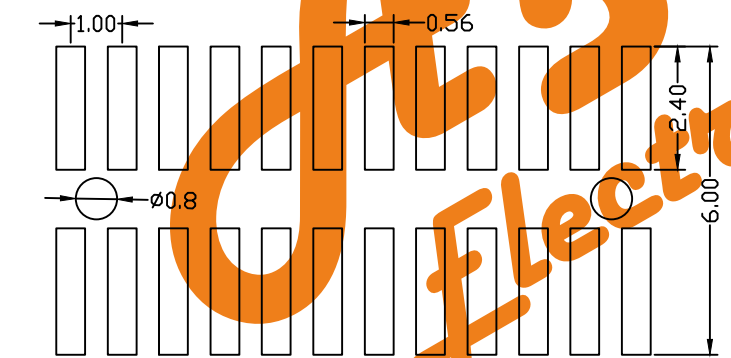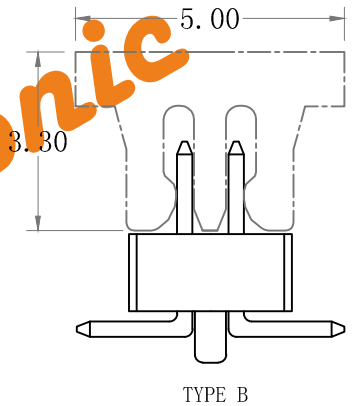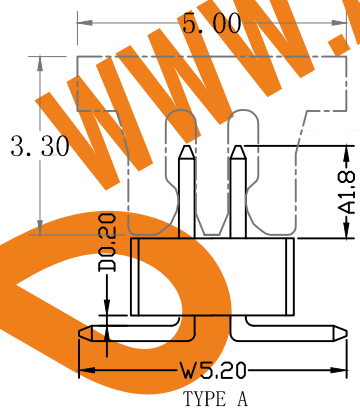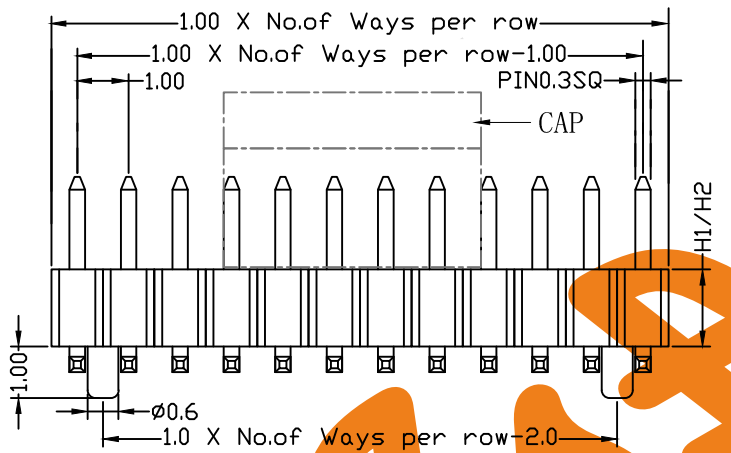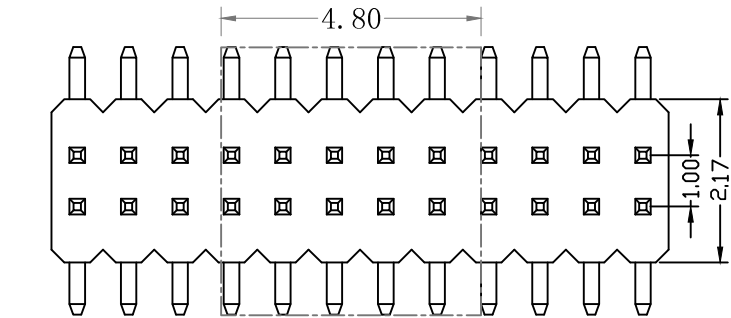

PCB LAYOUT

Unless Otherwise specified tolerance
 X: ±0.35
 X.X: ±0.25
 X.XX: ±0.20
 X.XXX: ±0.15


AsA Electronic www.AsA-Elec.com
 AsA Electronic Co.
 Tel: (+98) 21 66 73 56 82 Mob: (+98) 912 03 161 02

A	W	D
1.80	5.20	0.20

SCALE: 2:1 UNIT: mm
 DRAWN: junfon H
 CHECKED: YANG

TITLE:
 1.00mm Pin Header Dual Row SMT Type

Optional
 10-08-28
 DATE



DRAWING NO: PHBM02-XXDXXXXX
 PRODUCT NO: PHBM02-XXDXXXXX

REV	Add option of plating			DATE
1	2	3	4	5
	DESCRIPTION			