

ROHS COMPLIANT


1.00mm Pin Header Single Row Angle Type

SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:
 PHBR01 - X - X - S - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 01 To 50
- ③ Contact Plating: G0: Gold flash, G1: 3u" Gold, G2: 5u" Gold, G3: 10u" Gold, G4: 15u" Gold, G5: 30u" Gold, SN: Tin
- ④ Connector Type: S: Single
- ⑤ Pin Length: A+B+D+0.64
Please mark the desired length in the A/B/D
- ⑥ Insulator Material: B:PA6T, C:LCP, D:PA46
- ⑦ Packing: A:Tray, B:Bag, T:Tube
- ⑧ Plastic High: H1:1.0mm, H2:1.5mm

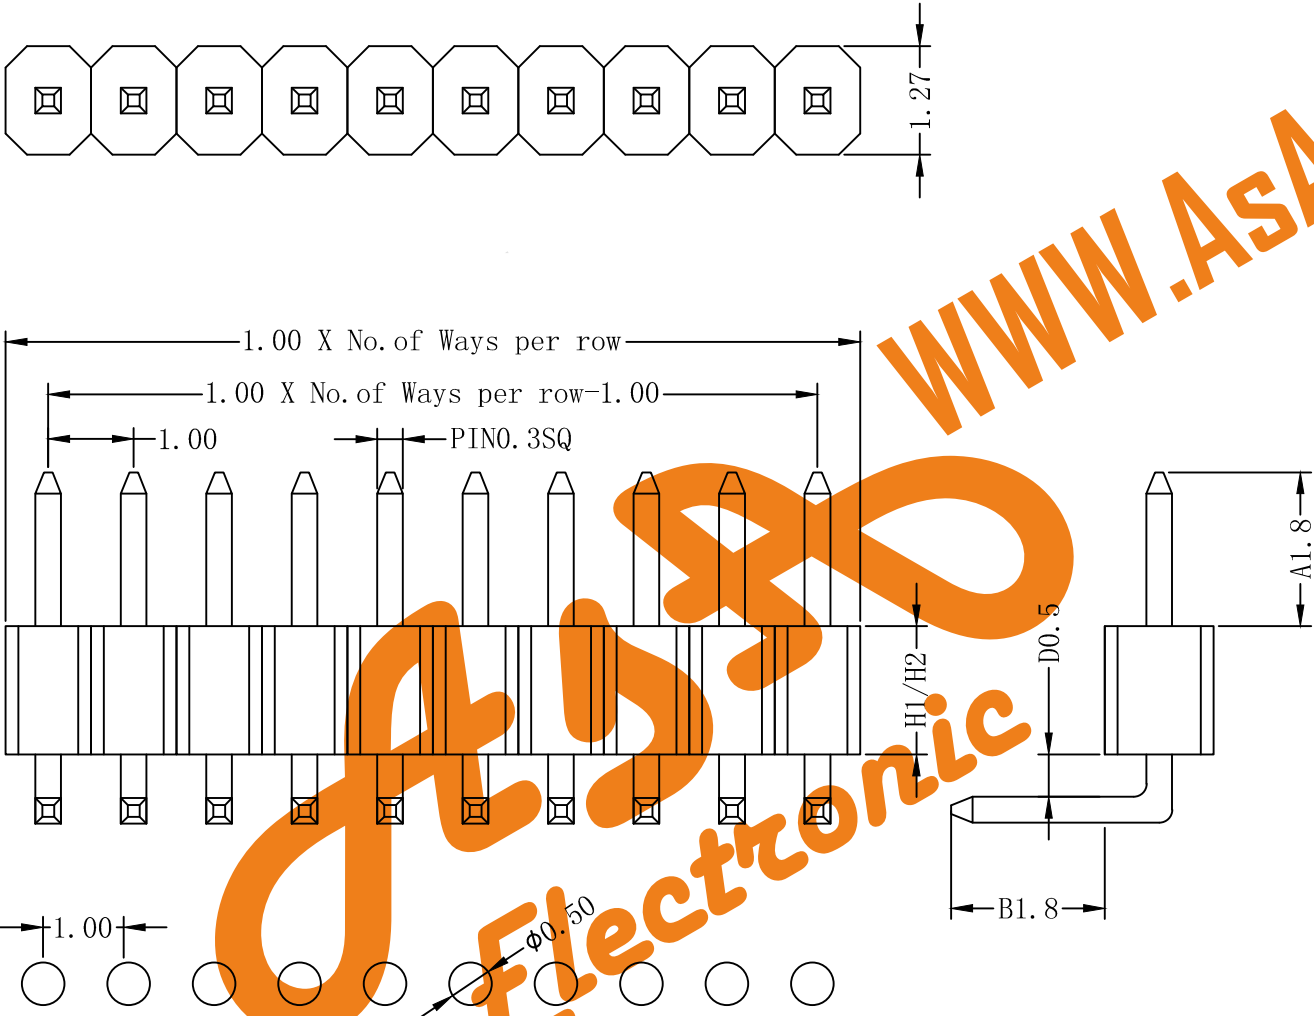

PCB LAYOUT


Unless Otherwise specified tolerance
 X.±0.35
 X.X:±0.25
 X.XX:±0.20
 X.XXX:±0.15

AsA Electronic Co.
 WWW.AsA-Elec.com
 Tel: (+98) 21 66 73 56 82 Mob: (+98) 912 03 161 02

A	B	D
1.80	1.80	0.50
Optional		

SCALE: 2:1 UNIT: mm
 DRAWN: junfon H
 CHECKED: YANG

TITLE:
 1.00mm Pin Header Single Row Angle Type



DRAWING NO: PHBR01-XXSXXXX
 PRODUCT NO: PHBR01-XXSXXXX

REV	DESCRIPTION	DATE
1	Add option of plating	10-08-28