

ROHS COMPLIANT

2.00mm Pin Header Dual Row SMT Type






SPECIFICATION

Current Rating: 1.5 Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHDM05 - X - X - D - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No:
- ② No. of Contacts: 02 To 80
- ③ Contact Plating: G0: Gold flash, G1: 3u" Gold, G2: 5u" Gold, G3: 10u" Gold, G4: 15u" Gold, G5: 30u" Gold, SN: Tin
- ④ Connector Type: D: Dual
- ⑤ Pin Length: A+D+H+(W-2.00)/2. Please mark the desired length in the A/D/H/W
- ⑥ Insulator Material: A: PBT, B: PA6T, C: LCP, D: PA46
- ⑦ Packing: A: Tray, B: Bag, T: Tube, U: Tube+CAP, R: Tape&Reel, W: Tape&Reel+CAP
- ⑧ Plastic High: H1: 1.5mm, H2: 2.0mm
- ⑨ Special Function: A: Type A, B: Type B

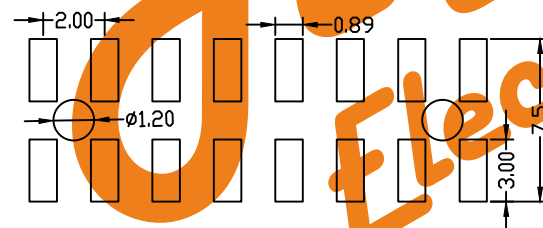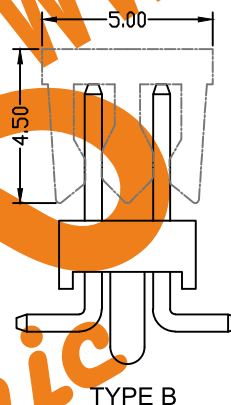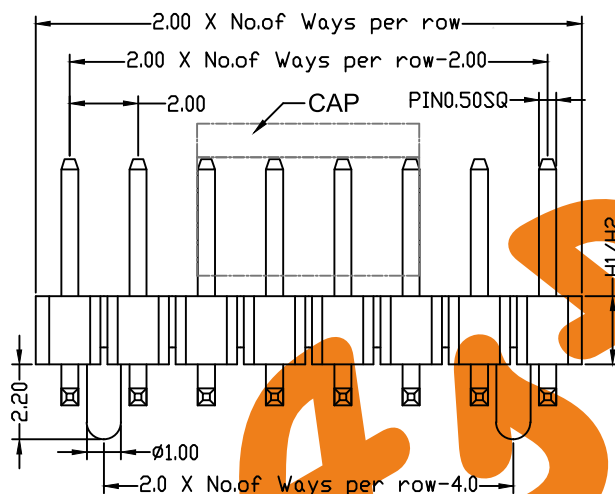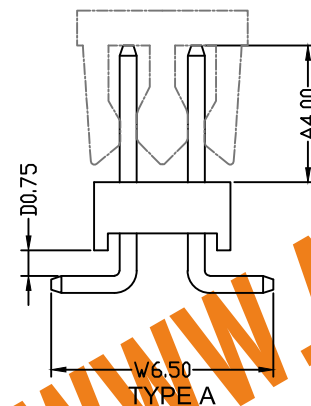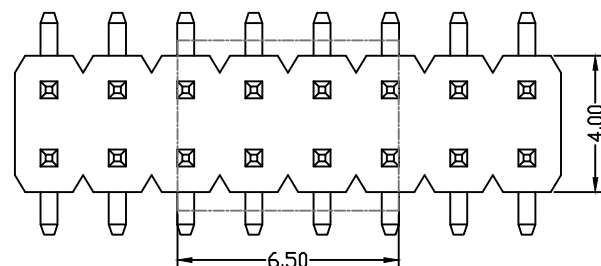

PCB LAYOUT

A	W	D
4.0	6.5	0.75

Unless Otherwise specified tolerance
 X: ±0.35
 X.X: ±0.25
 X.XX: ±0.20
 X.XXX: ±0.15




ASA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

Optional

SCALE: As Shown
 UNIT: mm

DRAWN: junfon H
 CHECKED: YANG



TITLE: 2.00mm Pin Header DualRow SMT Type
 DRAWING NO: PHDM05-XXDXXXXX
 PRODUCT NO: PHDM05-XXDXXXXX

REV	Add option of plating	10/8/1
	DESCRIPTION	DATE