ROHS COMPLIANT

1.00mm Female Header Single Row Straight Type

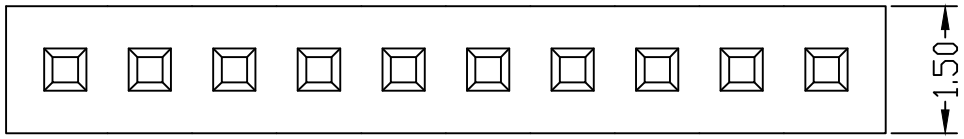

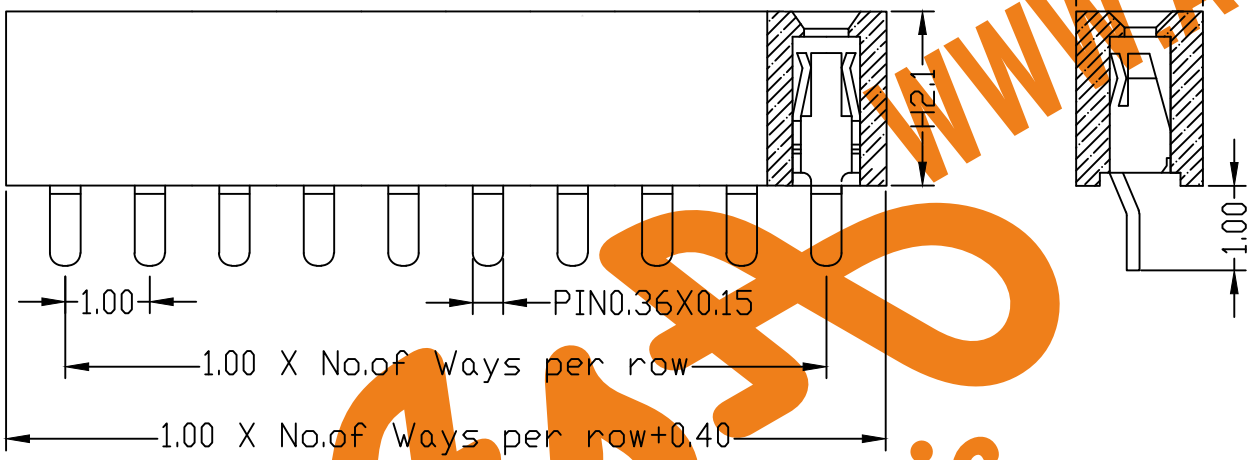

PCB LAYOUT

SPECIFICATION

Current Rating:	0.75Amp
Insulation Resistance:	5000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	Hi-Temp.Thermoplastic, UL 94V-0

Ordering Code:

FHBS01 - X - X - S - X - X - X

① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No.of Contacts
01 To 50

③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN:Tin

④ Connector Type
S:Single

⑤ Plastic High:
H:2.1
Please mark the desired length in the H

⑥ Insulator Material
B:PA6T
C:LCP
D:PA46

⑦ Packing
A:Tray
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

Unless Otherwise specified tolerance
X.±0.35
X.X:±0.25
X.XX:±0.20
X.XXX:±0.15

SCALE: As Shown
UNIT: mm

WWW.AsA-Elec.com
AsA Electronic Co.
Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

DRAWN: junfon H
CHECKED: YANG

3rd ANGLE PROJECTION

TITLE: 1.00mm Female Header Single Row Straight Type

DRAWING NO: FHBS01-XXSXXX
PRODUCT NO: FHBS01-XXSXXX

REV	DESCRIPTION	DATE
	Add option of plating	10/8/1

WWW.AsA-Elec.com
AsA Electronic