

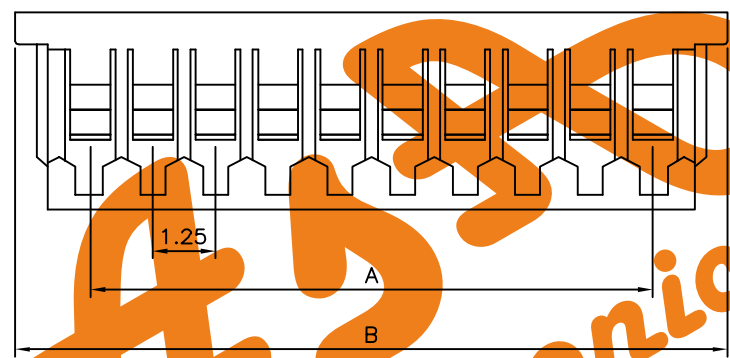


**SPECIFICATION**  
 Current Rating:1A AC/DC  
 Voltage Rating:125V AC Max.  
 Dielectric Withstanding Voltage:250V AC/Minute  
 Insulation Resistance:100 Megaohms Min.  
 Contact Resistance:20 Milliohms Max.  
 Operation Temp:-20°C~+85°C  
 Material:PA66(UL94V-0)  
 RoHS Compliant

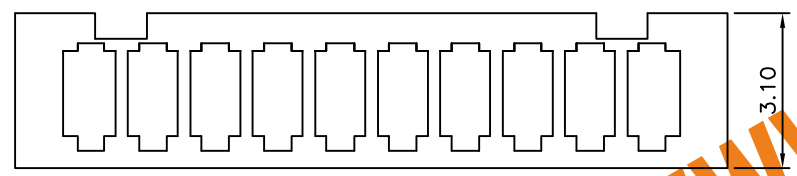

Contacts	A	B
2	1.25	4.25
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15
01186		MEI		
		CHECKED BY		
		H.Z		
		DRAWING BY		UNIT mm
		CYP		
SCALE	NONE	REV.	B1	

NO.	REV.	REVISIONS	CHK	DATE
△	B1	Modify Data	HZF	07/08/2015
△	B0	NEW RELEASE	HZF	12/10/2009