


**SPECIFICATION**  
 Current Rating:3A AC/DC  
 Voltage Raing:250V AC/DC  
 Withstand Voltage:1000V AC/Minute  
 Insulation Resistance:500 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Material:PA66(UL94V-0),Black  
 RoHS Compliant

**AsA Electronic**  
 WWW.AsA-Elec.com  
 telegram:09192986670  
 AsA Electronic Co.  
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

APPROVED BY	EMILY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.3 .XX ±0.3 ANG.
CHECKED BY	H.Z	
DRAWING BY	SONG	
SCALE	NONE	REV. A3

NO.	REV.	REVISIONS	CHK	DATE
A3		Modify Data	HZF	08/22/2012
A2		Modify Data	HZF	12/07/2011
A1		Modify Data	BECKY	07/21/2004
A0		NEW RELEASE		

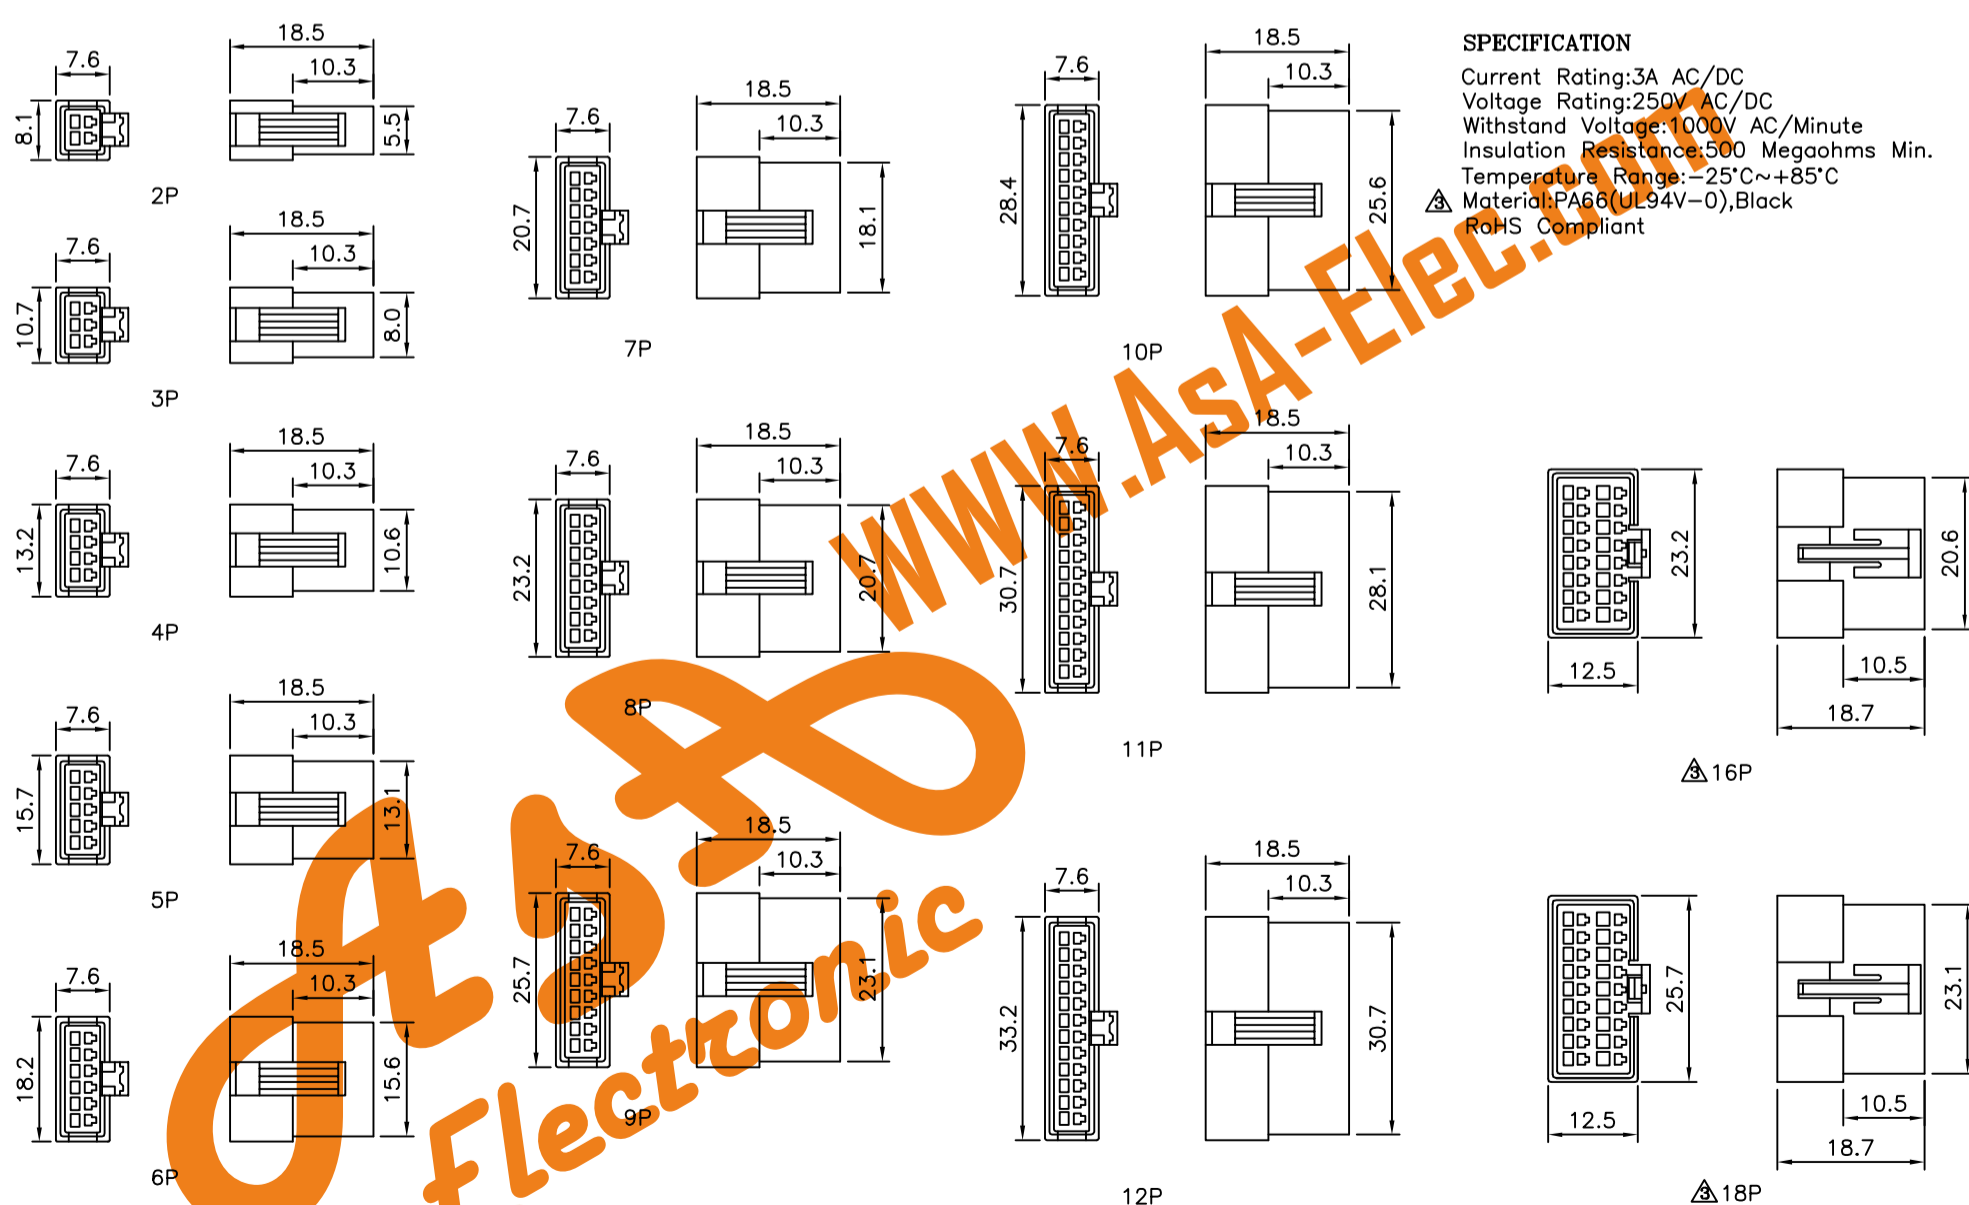

**SPECIFICATION**  
 Current Rating:3A AC/DC  
 Voltage Rating:250V AC/DC  
 Withstand Voltage:1000V AC/Minute  
 Insulation Resistance:500 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Material:PA66(UL94V-0),Black  
 RoHS Compliant

**AsA Electronic**  
 WWW.AsA-Elec.com  
 telegram:09396994470  
 AsA Electronic Co.

APPROVED BY	EMILY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.3 .XX ±0.3 ANG.
CHECKED BY	HZF	
DRAWING BY	SONG	

NO.	REV.	REVISIONS	CHK	DATE
A3		Modify Data	HZF	08/22/2012
A2		Modify Data	HZF	12/07/2011
A1		Modify Data	BECKY	07/21/2004
A0		NEW RELEASE		