


△ SPECIFICATIONS
 Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Withstanding Voltage: 1500V AC/Minute
△ Contact Resistance: 10 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Temperature Range: -25°C To +85°C
 Applicable PC Board Thickness: 1.6mm
 Post: Brass, Tin Plated
 Base: Nylon 66, UL94V-2
 Q'ty: 500,1000 Pcs/Bag

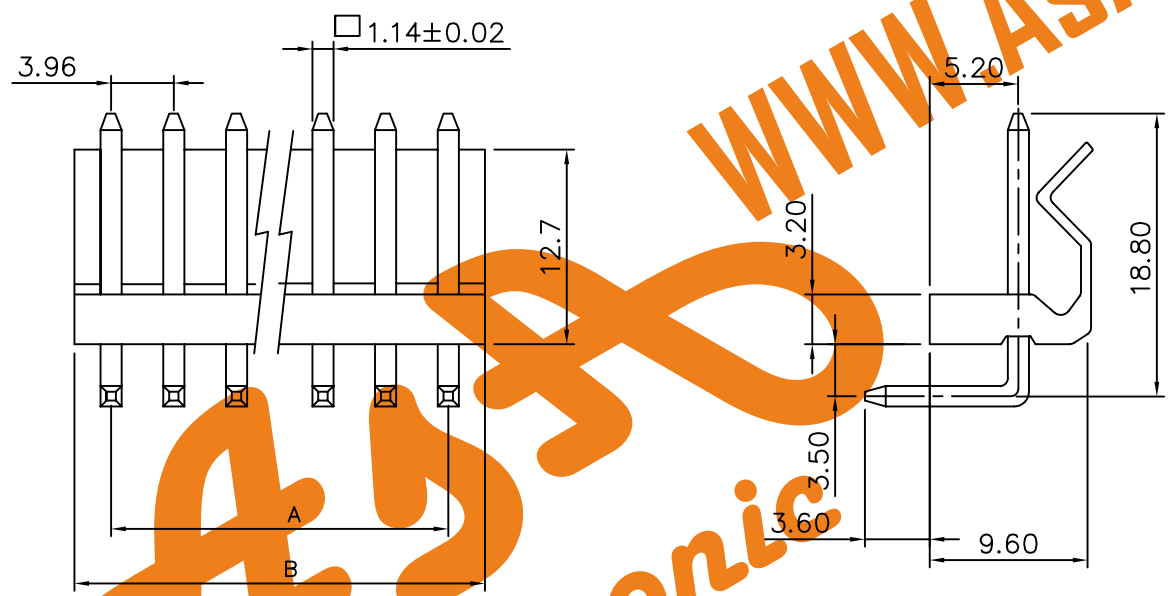

Poles	Dim A	Dim B
2	3.96	8.0
3	7.92	12.0
4	11.88	15.9
5	15.84	20.0
6	19.80	24.0
7	23.76	27.9
8	27.72	31.9
9	31.68	35.8
△ 10	35.64	39.7
11	39.60	43.9
12	43.56	47.8
13	47.52	51.8
14	51.48	55.7
15	55.44	59.8
16	59.40	63.8
17	63.36	67.7
18	67.32	71.7
19	71.28	75.6
20	75.24	79.8

AsA Electronic
 WWW.AsA-Elec.com
 AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

DRAWING No.
 telegram: 09396994470

APPROVED BY MEI
CHECKED BY BECKY
DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.35
 .XX
 .XXX

UNIT mm

SCALE NONE **REV.** A2

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify: 20 Milliohms → 10 Milliohms	BECKY	06/02/2005
△	A1	Dim.B: 39.9 → 39.7 & Add Spec.	BECKY	01/05/2005
△	A	NEW RELEASE	RAN	04/11/2001