



**SPECIFICATIONS**  
 Current Rating: 5A AC,DC  
 Voltage Rating: 250V AC Max.  
 Operating Temp: -25°C~+85°C  
 Contact Resistance: 10 Milliohms Max.  
 Insulation Resistance: 1000 Megohms Min.  
 Dielectric Withstanding Voltage: 1500V AC,DC Min.  
 Contact: Brass, Tin Plated  
 Insulator: Nylon 66, UL 94V-0

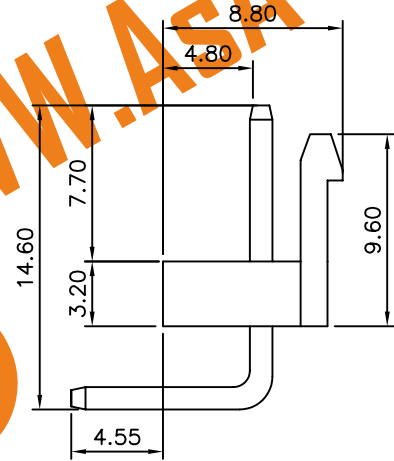

Poles	A	B
02	3.96	7.92
03	7.92	11.92
04	11.88	15.84
05	15.84	19.84
06	19.80	23.80
07	23.76	27.88
08	27.72	31.74
09	31.68	35.86
10	35.64	39.90
11	39.60	43.84
12	43.56	47.92
13	47.52	51.72
14	51.48	55.92

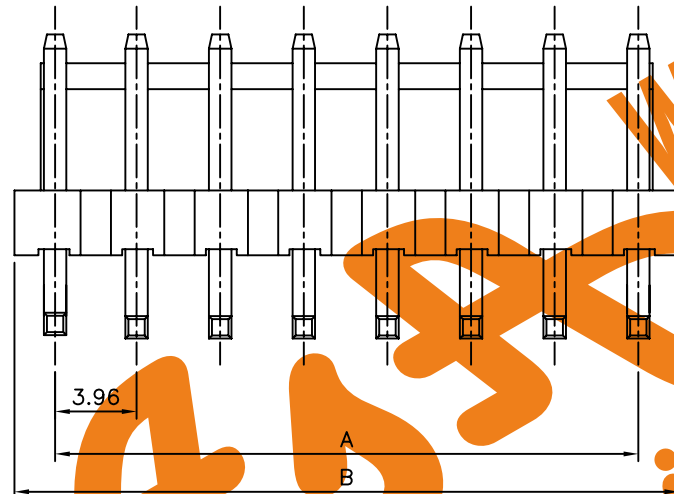

PCB Layout Component Side

**AsA Electronic**  
 WWW.AsA-Elec.com  
 AsA Electronic Co.  
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
telegram: 09396994470		MEI		
		CHECKED BY		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.		UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
			BECKY	02/08/2006