



△△ SPECIFICATION
 Current Rating: 5A AC/DC
 Voltage Rating: 250V AC Max.
 Operating Temperature: -25°C~+85°C
 Insulation Resistance: 1000 Megaohms Min.
 Insulator: PA66(UL94V-0)
 RoHS Compliant

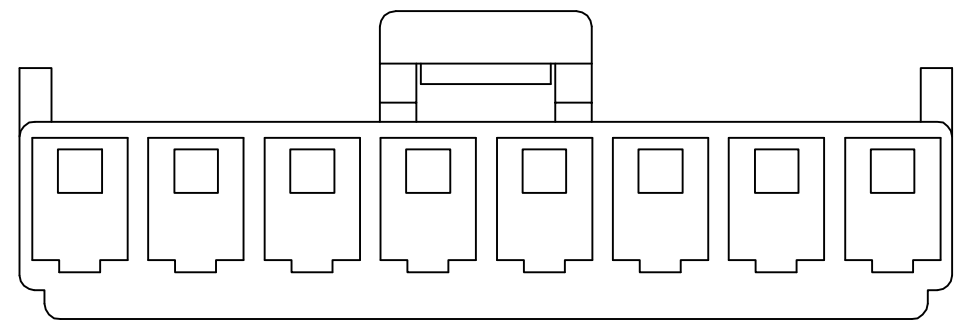


△

WWW.ASA-ELEC.COM

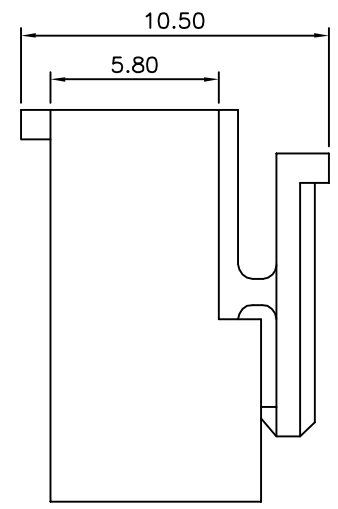

△

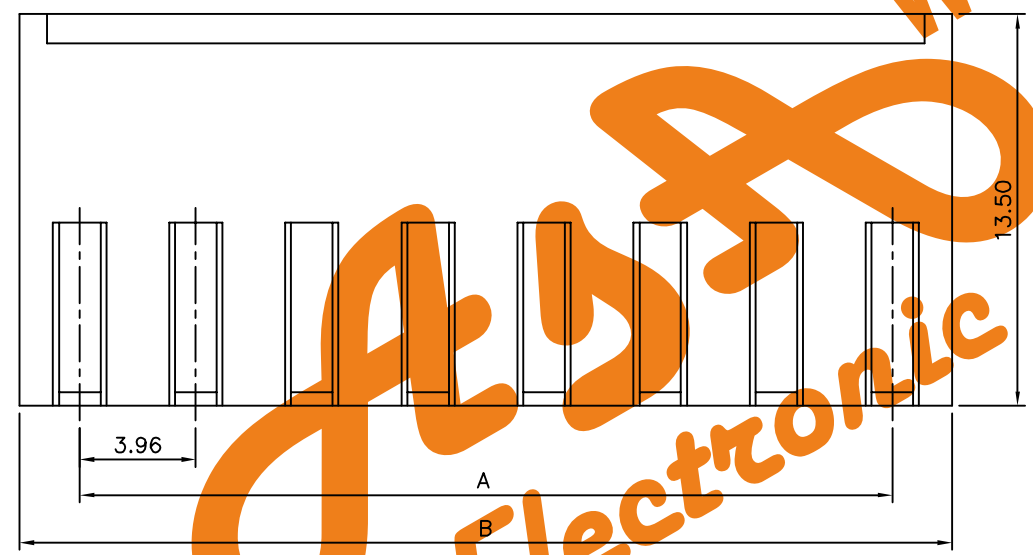

△

Pin	A	B
02	3.96	8.04
03	7.92	12.10
04	11.88	15.96
05	15.84	20.00
06	19.80	23.90
07	23.76	27.90
08	27.72	31.86
09	31.68	35.88
10	35.64	39.84
11	39.60	43.74
12	43.56	47.74
13	47.52	51.70
14	51.48	55.66

ASA Electronic
 WWW.ASA-Elec.com
 AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

APPROVED BY EMILY
 CHECKED BY H.Z
 DRAWING BY GAO

telegram:
09396994470

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △ .X ±0.5
 .XX ±0.25
 ANG.

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	12/04/2012
△	A1	Modify Data	HZF	12/28/2011
△	A0	NEW RELEASE	RAN	

SCALE NONE REV. A2 UNIT mm

