
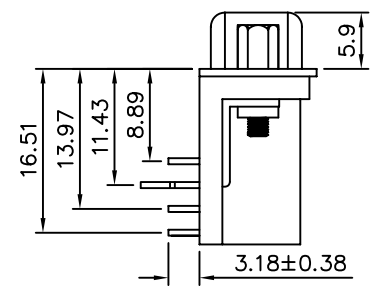
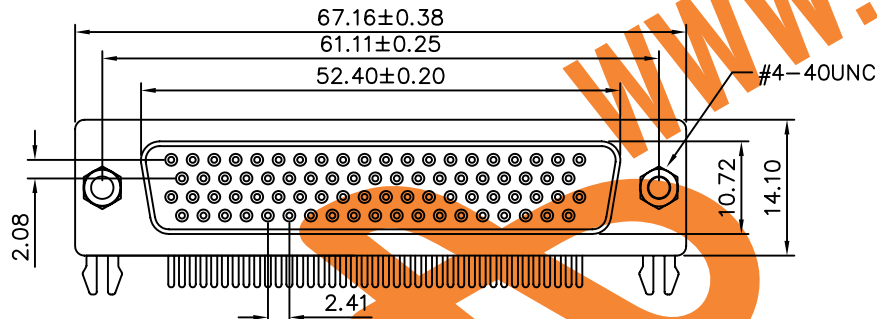


MATERIALS

Insulator: PBT+30% Glass Fiber(UL 94V-0),Black
 Contact Material: Brass
 Contact Finish: Gold Flash On Mating End, Tin-Lead
 On Termination End, With Entire
 Contact Nickel Underplated
 Shell Finish: Steel Nickel Plated

SPECIFICATIONS

Current Rating: 2 Amps
 Dielectric Withstanding Voltage: 1000V Per Minute
 Insulation Resistance: 1000 Megohms Min. At 500V DC
 Contact Resistance: 15 Milliohms Max. 10 Seconds
 Operating Temperature: -55°C To +105°C

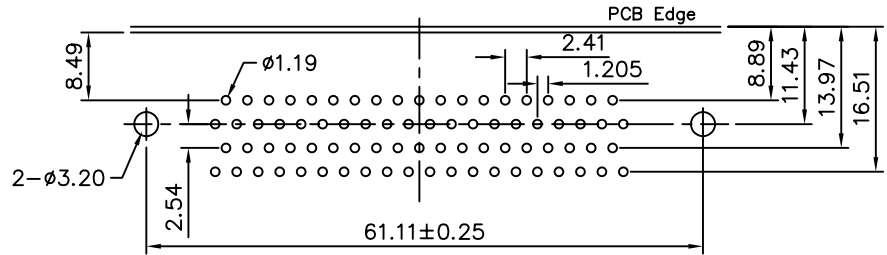

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 .XXX ±0.05 ANG. ±2°					
15774		MEI							
		BECKY							
		DRAWING BY							
		HZF							
SCALE	NONE	REV.	A0	UNIT mm		△ A0	NEW RELEASE	BECKY	2004/10/01
						NO.REV.	REVISIONS	CHK	DATE