
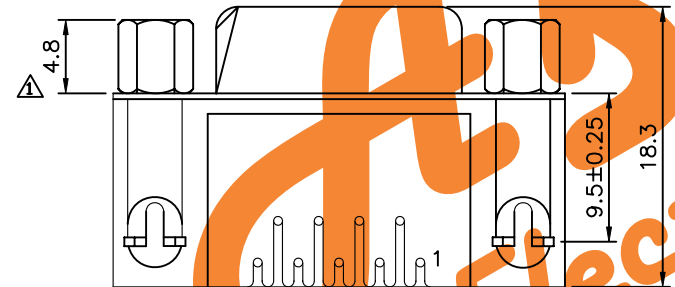
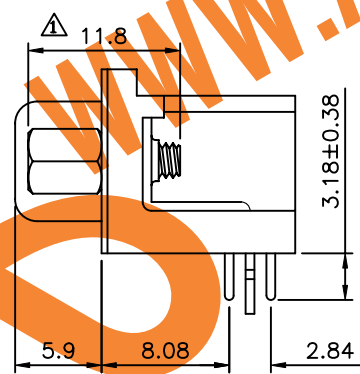
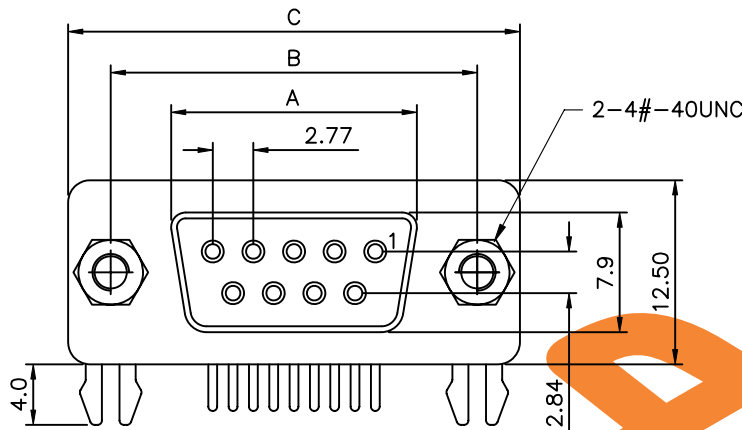


**△ SPECIFICATION**

Current Rating: 5Amp  
 Dielectric Withstanding Voltage: 1000V AC For 1 Minute  
 Insulation Resistance: 1000 Megaohms Min. At 500V DC  
 Contact Resistance: 15 Milliohms Max.  
 Operation Temperature: -55°C~+105°C  
 Insulator: PBT UL94V-0, Black  
 Contact: Copper Alloy  
           Selective Gold Flash Over Nickel  
 Shell: Steel, Nickel Plated  
 Boardlock: Steel, Tin Plated  
 RoHS Compliant

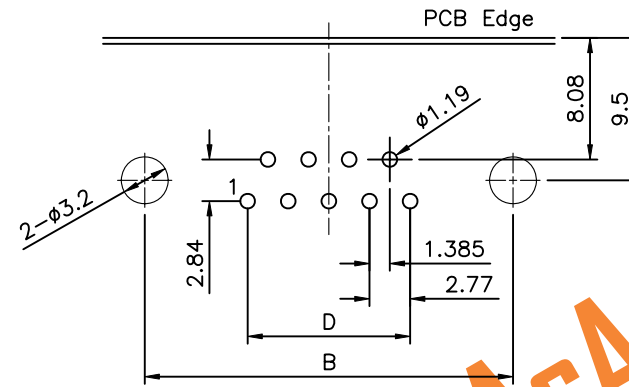

△

Position	A±0.20	B±0.20	C±0.38	D
9	16.30	25.00	30.80	11.08
15	24.60	33.30	39.20	19.39
25	38.35	47.05	53.05	33.24
37	54.80	63.50	69.40	49.86

**AsA Electronic**  
 WWW.AsA-Elec.com  
**AsA Electronic Co.**  
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

DRAWING No. **telegram: 09396994470**

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY LXX

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.25  
 .XX ±0.15  
 .XXX ±0.05  
 ANG ±1°

UNIT mm

SCALE NONE REV. B1

NO.	REV.	REVISIONS	CHK	DATE
△ B1		Modify Data	HZF	09/01/2009
△ B0		NEW RELEASE	HZF	03/13/2007