


Status: Active
Description: 2.00mm (.079") Pitch Wire-to-Wire Plug Housing, 2 Circuits

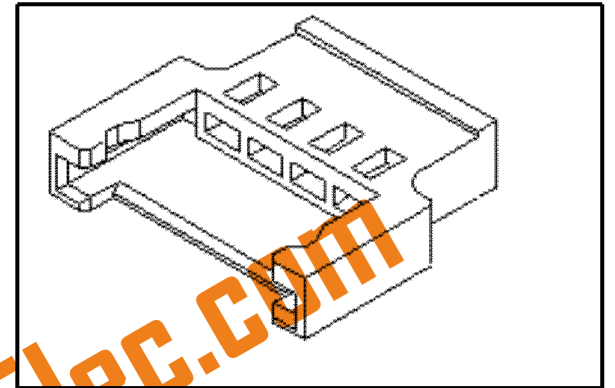

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	Crimp Housings
Series	51006
MolexKits	Yes
Product Name	N/A

Physical

Circuits (maximum)	2
Color - Resin	Natural
Flammability	94V-0
Gender	Male
Glow-Wire Compliant	No
Lock to Mating Part	None
Material - Resin	Polyester
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Electrical

Current - Maximum per Contact	2A
-------------------------------	----

Material Info




WWW.AsA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

10 9 8 7 6 5 4 3 2 1

F
E
D
C
B
A

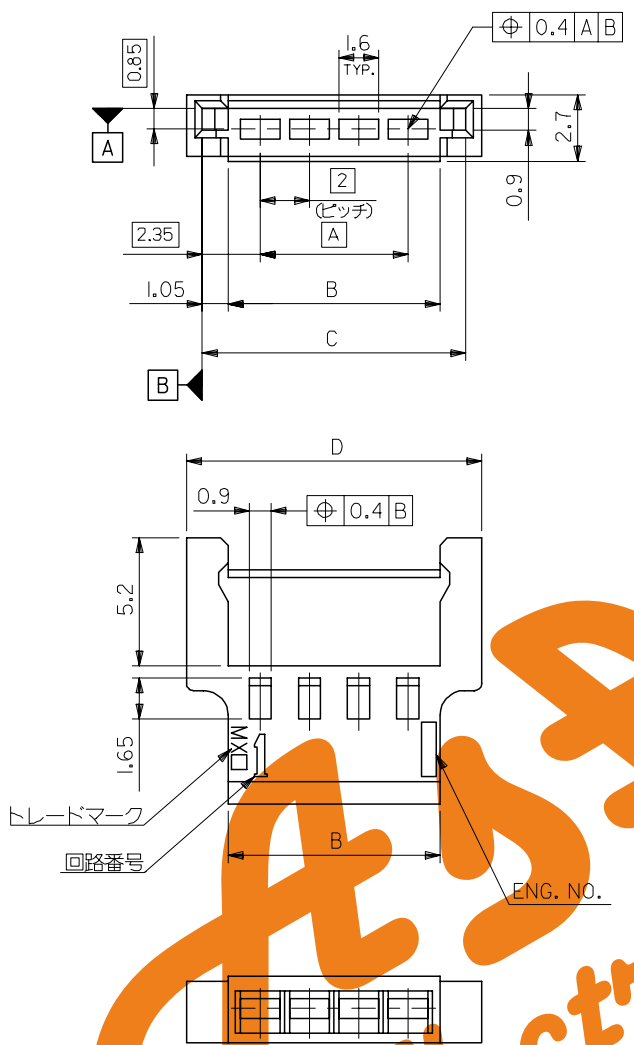

注記

1. 嵌合相手 : 51005
MATE WITH : 51005
2. 適合ターミナル : 50012
APPLICABLE TERMINAL : 50012
3. ELV 及び RoHS 適合品
ELV AND RoHS COMPLIANT.

WWW.ASA-Elec.com



Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

14	12.7	10.6	8	51006-0500	5
12	10.7	8.6	6	↑ - 0400	4
10	8.7	6.6	4	↓ - 0300	3
8	6.7	4.6	2	51006-0200	2
D	C	B	A	MATERIAL NO.	極数

J2	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER	±0.2	DRAWN BY S.MOCHIZUKI	DATE '89/08/22	TITLE 2.0 WIRE TO WIRE CONN. PLUG HOUSING			
		10 OVER 30 UNDER	±0.25	CHECKED BY H.H	DATE '90/05/16				
		30 OVER	±0.3	APPROVED BY M.ENOMOTO	DATE '90/05/16				
		ANGULAR ±3 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3			
D	REV					TELEGRAM:09396994470			

9 8 7 6 5 4 3 2 1