
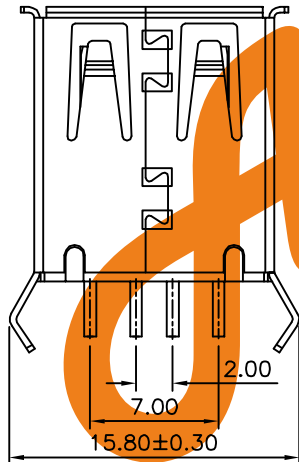
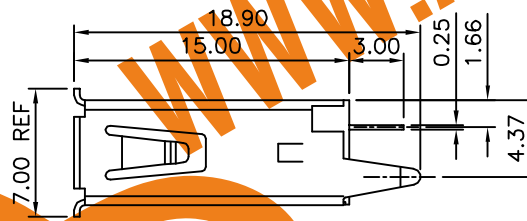


Recommended P.C.B. Layout



**SPECIFICATION**  
 Current:1.5A Max.  
 Voltage:30V Max.  
 Withstanding Voltage:500V AC  
 Contact Resistance:30 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-55°C~+85°C  
 Mating Force:35N Max.  
 Withdrawal Force:10N Min.  
 Durability:1500 Cycles Min.  
 Contacts:Brass

Gold Flash On Contact Area,Tin  
 Plated On Solder Tails,Over Nickel

- ⚠ Insulator/Back Cup:PBT+G.F.(UL94V-0)  
 Shell:Brass,Nickel Plated Over All  
 RoHS Compliant

Insulator Color	Item No.
White	05240
Black	20594

**AsA Electronic**  
 WWW.AsA-Elec.com  
 AsA Electronic Co.  
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

APPROVED BY EMILY  
 CHECKED BY HZ  
 DRAWING BY SONG  
 UNIT mm

Telegram:  
**09396994470**

SCALE NONE REV. B2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38	.X' ±2'
.XX ±0.25	.XX' ±1'
.XXX ±0.13	.XXX' ±0.5"

NO.	REV.	REVISIONS	CHK	DATE
⚠ B2		Modify P/N Code	HZF	08/11/2014
⚠ B1		Modify Data	HZF	08/01/2011
⚠ B0		NEW RELEASE	HZF	06/16/2010