


SPECIFICATION

Current Rating: 1 Amp Max.
 Dielectric Withstanding Voltage: 30V AC For 1 Minute
 Insulation Resistance: 1000 Megaohms Min. At DC 500V
 Contact Resistance: 30 Milliohms Max.
 Temperature Range: -55°C~+105°C
 Contact: Brass
 Shell: Cold Rolled Steel, Nickel Plated Over Copper
 Insulator: PBT(UL94V-0), Black
 RoHS Compliant

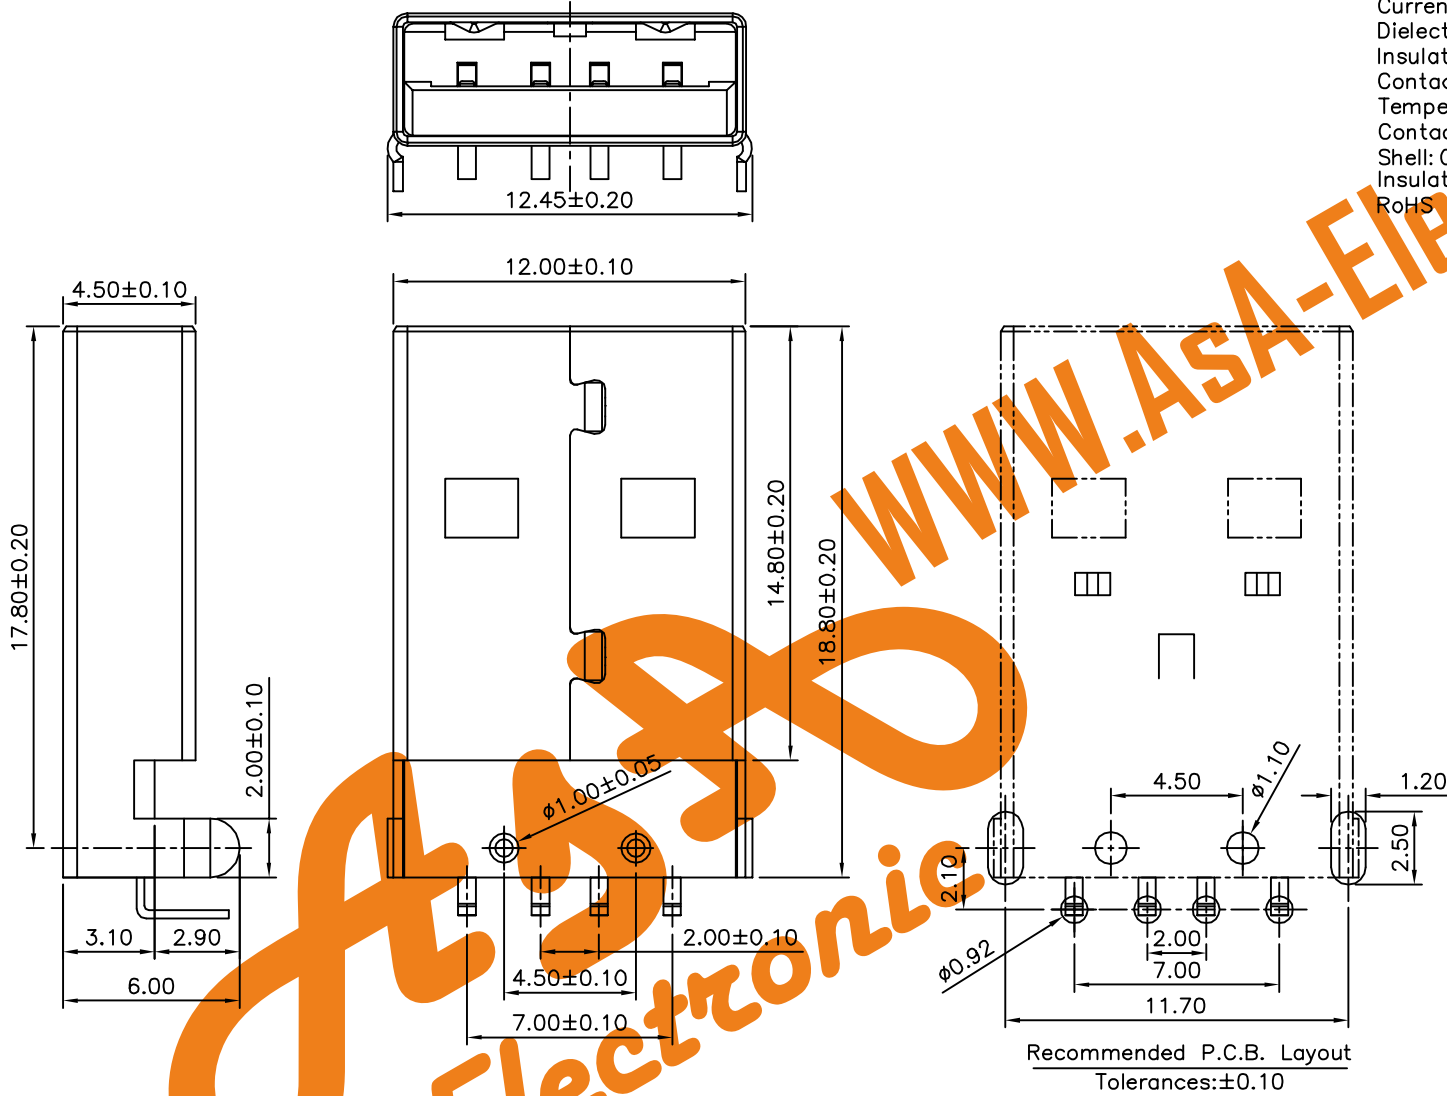

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

Telegram:09396994470

DRAWING No.		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±1°
		CHECKED BY HZF		
		DRAWING BY WZL		
SCALE	NONE	REV.	BO	UNIT mm

NO.	REV.	BO	NEW RELEASE	HZF	09/22/2010
			REVISIONS	CHK	DATE