



△ SPECIFICATION


Current Rating: 1A Max.
 Dielectric Withstanding Voltage: 30V AC For 1 Minute
 Insulation Resistance: 1000 Megohms Min. At DC 500V
 Contact Resistance: 30 Milliohms Max.
 Temperature Range: -55°C ~ +105°C
 Housing: PA6T(UL94V-0), White
 Contact: Brass, Gold Plated On Contact Area, Tin Plated
 On Solder Tail, Under Nickel
 Shell: Cold Rolled Steel, Nickel Plated Over Copper
 RoHS Compliant

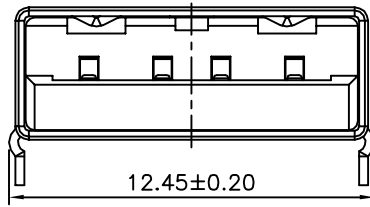

△

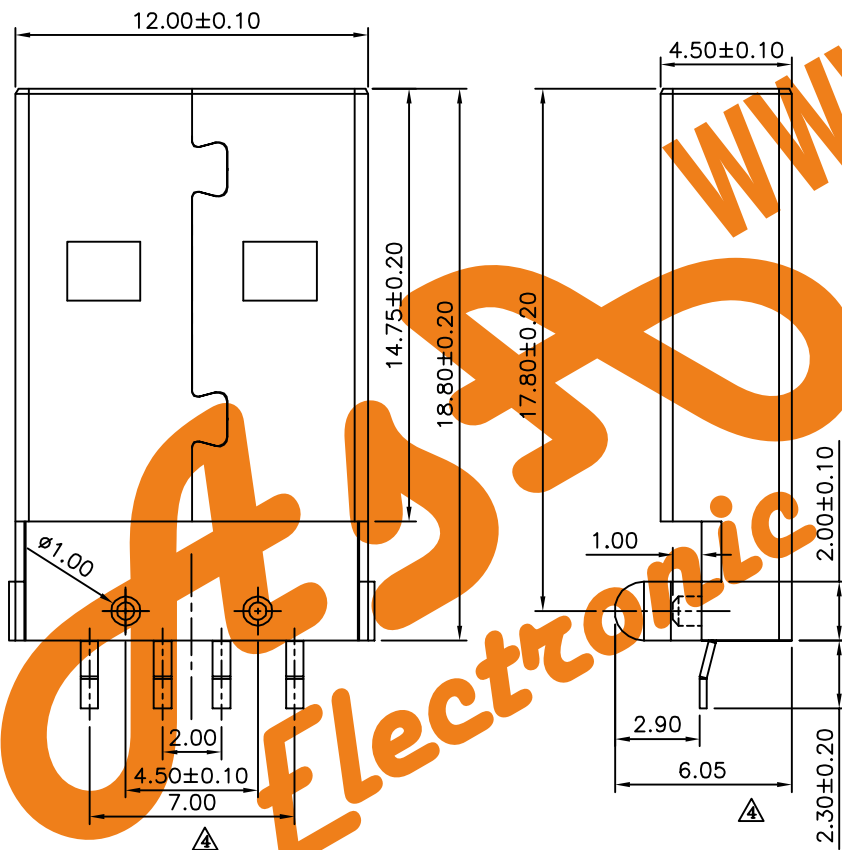

△

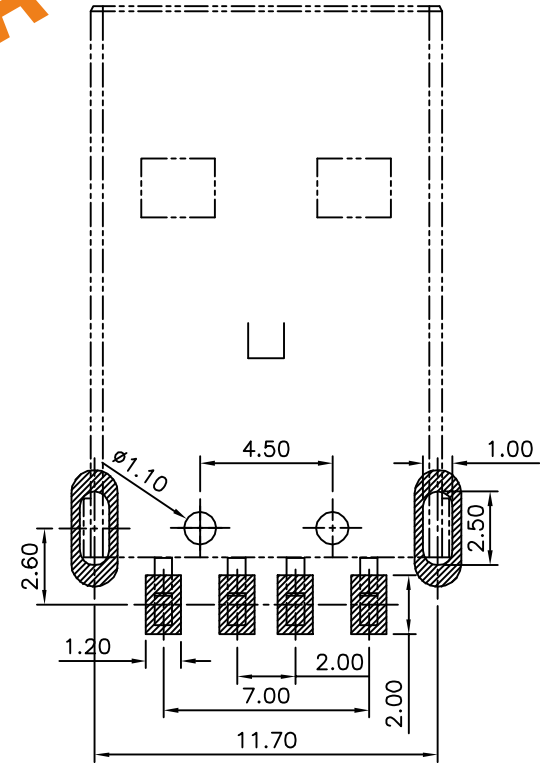

△ Recommended P.C.B. Layout
 (PCB Board Tolerance ±0.10)

AsA *Electronic*
 WWW.AsA-Elec.com
AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

Telegram:
09396994470

APPROVED BY MEI
 CHECKED BY HZ
 DRAWING BY WZL

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±1°

SCALE NONE REV. A4 UNIT mm

△ A4	Modify Data	HZF	09/23/2010
△ A3	Modify Data	HZF	06/12/2009
△ A2	Modify Part No.	INGRID	10/01/2007
△ A1	Add Dim.	BECKY	01/20/2006
△ A0	NEW RELEASE	MEI	10/10/2001
NO. REV.	REVISIONS	CHK	DATE