



1

2

3

4

5

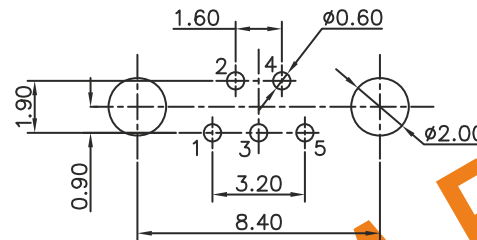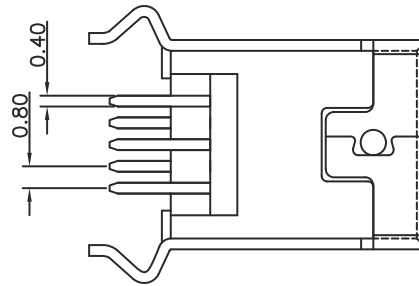



RECOMMENDED PCB LAYOUT
 RECOMMENDED PCB THICKNESS : 1.6 mm

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR MATERIAL: PBT
 FLAMMABILITY RATING: UL94-V0
 COLOR: BLACK
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: SELECTIVE GOLD
 SHIELDING: BRASS WITH Ni PLATING
 QUALITY CLASS: 1500 MATING CYCLES

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 1.0 A MAX
 WORKING VOLTAGE: 30 VAC
 INSULATOR RESISTANCE: >1000 MΩ
 DIELECTRIC WITHSTANDING VOLTAGE: 750 VAC/MIN
 CONTACT RESISTANCE: 20 mΩ MAX

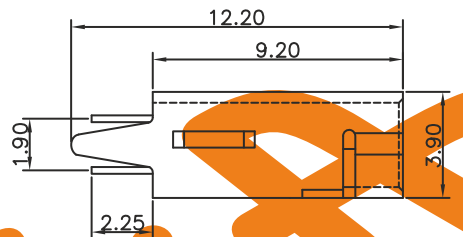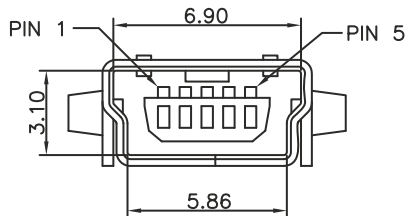

WWW.AsA-Elec.com

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

Check	H.Z

PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15
APPROVAL: NPr	UNIT: MM SCALE: SHEET: DRAW: AS

Telegram:09396994470	
DESCRIPTION: WR-COM - VERTICAL MINI USB 2.0 TYPE B 5 CONTACTS	SIZE A4

A

B

C

D