


**△ SPECIFICATION**

Current Rating: When Applying Current Only To Signal Terminals:  
 1.0A (For Terminal No. 2, 3 And 4)  
 When Applying Current Only To Power Terminals:  
 1.8A (For Terminal No. 1 And 5)  
 0.5A (For Terminal No. 2, 3 And 4)

Voltage Rating: 30V AC  
 Insulation Resistance: 100 Megaohms At 100V DC  
 Dielectric Withstanding Voltage: 100V RMS AC For 1 Minute  
 Contact Resistance: 30 Milliohms Max.  
 Operating Temperature: -30°C ~ +80°C  
 Housing: LCP (UL 94V-0), Black  
 Contact: C2680, Gold Flash Over Nickel  
 Shell: Stainless Steel, Tin Plated Over Nickel  
 RoHS Compliant

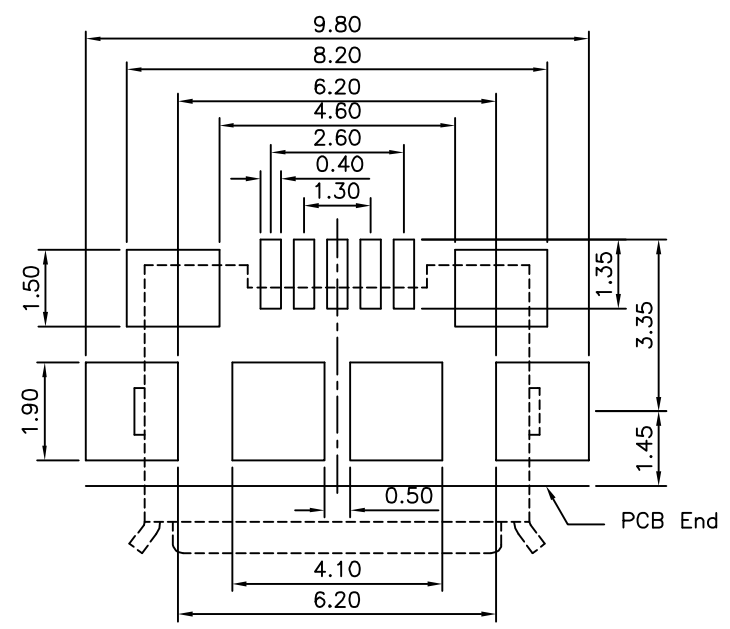

Recommended P.C.B. Layout

APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X: ±0.50 X*: ±5* .X ±0.25 .X* ±2* .XX ±0.15 .XX* ±1*
CHECKED BY HZ		
DRAWING BY		
SCALE	NONE	REV. A2
UNIT mm		

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZ	07/15/2015
△ A1		Modify Data	HZ	06/23/2015
△ A0		NEW RELEASE	HZ	05/21/2014