

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/26/06		

**SPECIFICATION**


1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V,AC/Minute.
3. Durability:600 Cycles Min.

[WWW.AsA-Elec.com](http://WWW.AsA-Elec.com)





**AsA Electronic Co.**

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

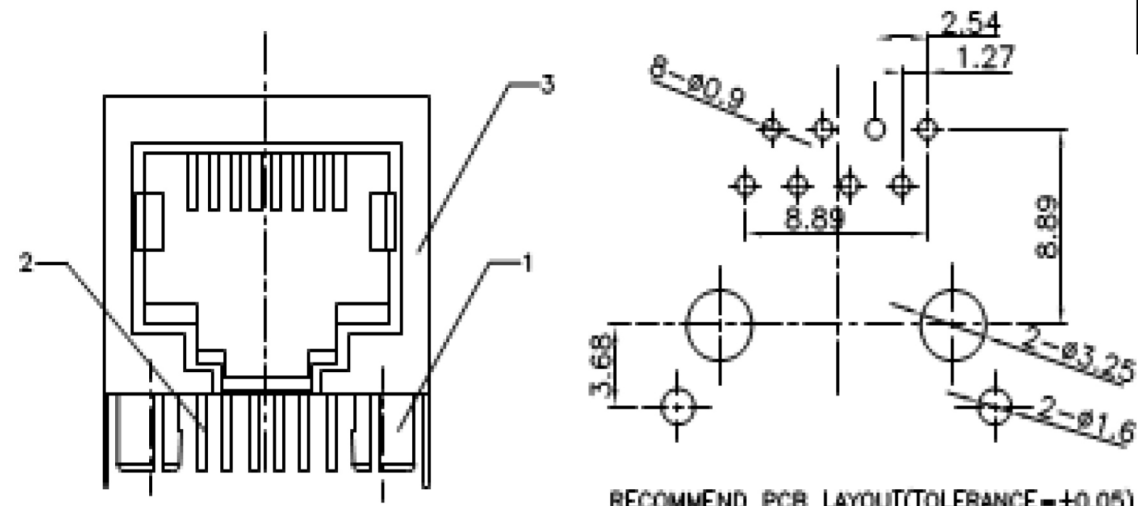

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

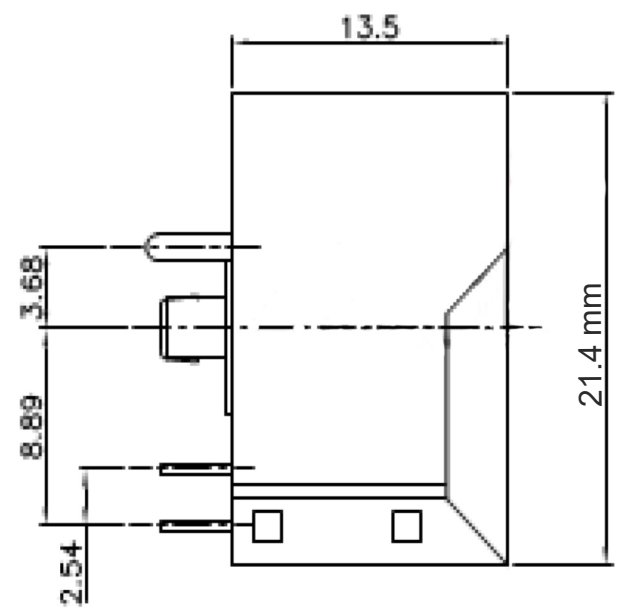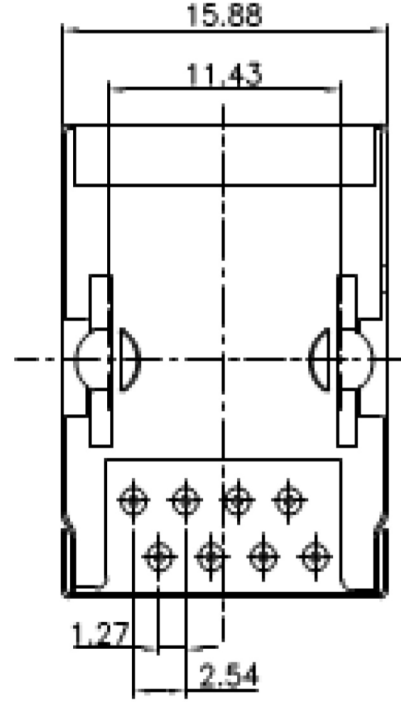

(3)	SHIELDING	1	COPPER ALLOY	0.20mm THICKNESS
(2)	PIN	1	PHOSPHOR BRONZE	GOLD PLATING
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0 OR 94 V-2
No.	PART NAME	Q'ty	MATERIAL	REMARK

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.			

PROJECTION		TITLE	
UNITS	mm	PCB JACK 8P 1PORT	
SHEET SIZE	A4	SERIES	1128 SERIES