


△ SPECIFICATION
 Voltage Rating: 125V AC RMS
 Current Rating: 1.5 Amp @25°C
 Dielectric Strength: 1000V AC RMS, Contact To Contact Or 1500V DC, Contact To Screen And Test Panel @0.5mA 50Hz Or 60Hz 1 Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min. @500V DC
 Operation Temperature: -40°C~+85°C
 Storage Temperature: -40°C~+85°C, Relative Humidity: <80%
 Mating/Unmating Force: 30N Max.
 Retention Strength: 50N For 60s±5s
 Operating Life: 750 Cycles Min.
 Housing & Insert: PBT(UL94V-0),
 Contact: Phosphor Bronze,
 Gold Plated 15u" On Contact Area, Tin Plated On Solder Tail, Under Nickel
 Mates With Modular Plug Conforming To FCC Part 68, Subpart F.
 RoHS Compliant

WWW.ASA-ELEC.COM

ASA Electronic

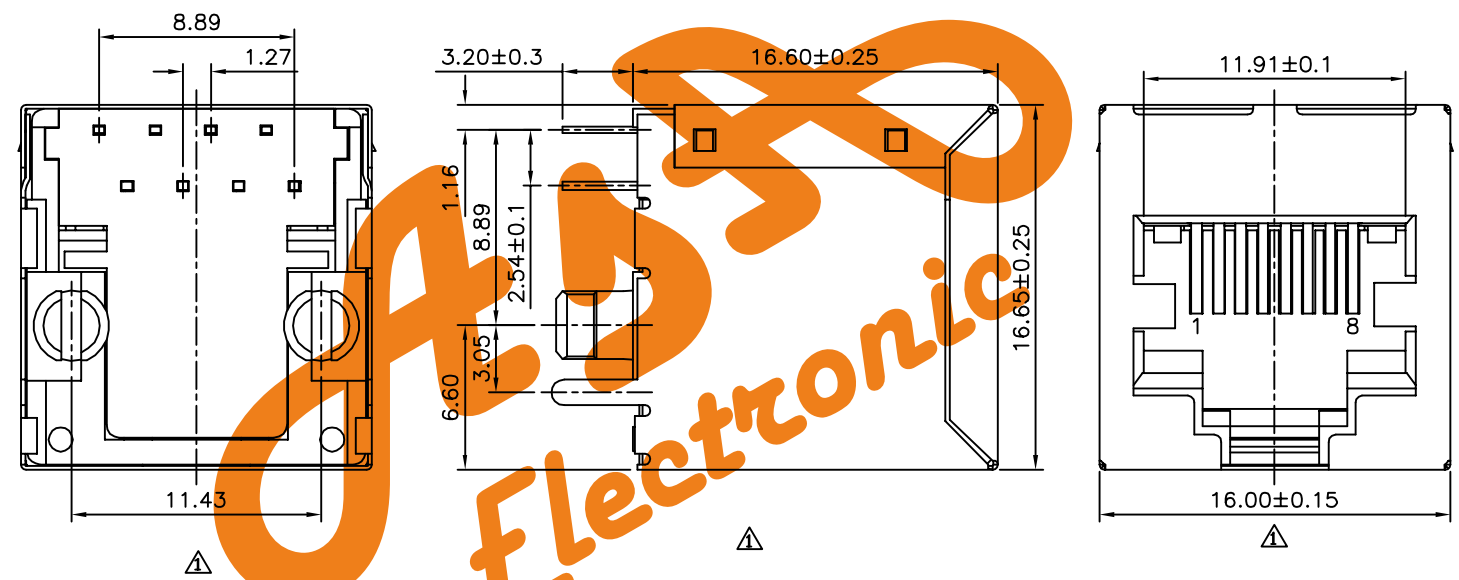

ASA WWW.ASA-Elec.com
Electronic
AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

Telegram: 09396994470		APPROVED BY	MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE 0~15 ±0.15 15~30 ±0.20 30~ ±0.25 ANG. ±1°				
		CHECKED BY	HZ					
		DRAWING BY	WZL					
		SCALE	NONE		REV.	B1	UNIT	mm
						△ B1 Modify Data △ B0 NEW RELEASE	HZF HZF	04/18/2011 12/25/2008
NO.	REV.	REVISIONS		CHK	DATE			