
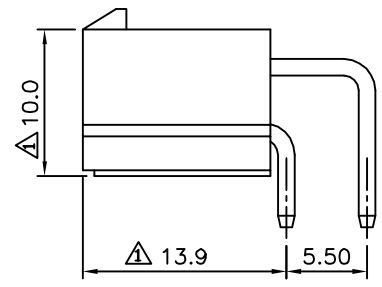
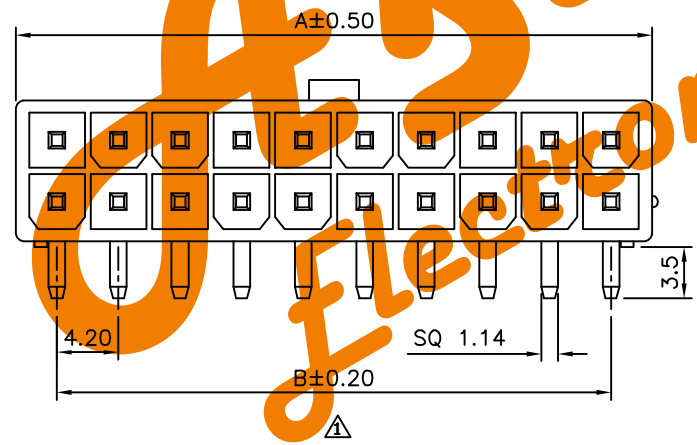


Recommended P.C.B. Layout(Top View)

△ SPECIFICATION
 Current Rating:7.0 Amp Max.
 Dielectric Withstand Voltage:
 1000V AC RMS For 60 Seconds
 Insulation Resistance:1000 Megaohms Min.
 At 1000V DC
 Operation Temperature:-25°C~+85°C
 Housing:PA66(UL94V-2)
 Terminal:Brass,Tin Plated Over Nickel
 RoHS Compliant

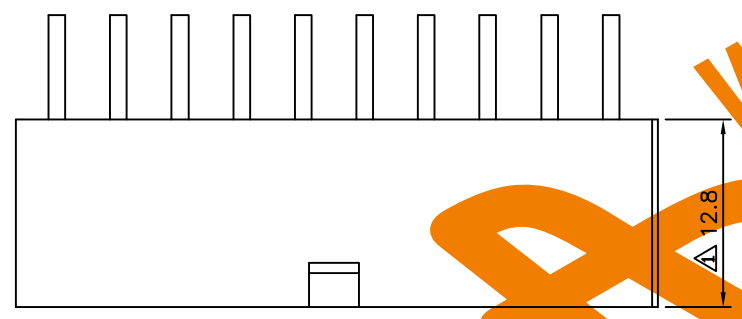

Pin	A	B
02	5.60	—
04	9.80	4.20
06	14.00	8.40
08	18.20	12.60
10	22.40	16.80
12	26.60	21.00
14	30.80	25.20
16	35.00	29.40
18	39.20	33.60
20	43.40	37.80
22	47.60	42.00
24	51.80	46.20

AsA Electronic Co.
 WWW.AsA-Elec.com
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

09396994470
 APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY SONG
 SCALE NONE REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △ .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	07/10/2012
△ A1		Modify Data	HZF	02/22/2010
△ A0		NEW RELEASE	HZF	