

D-SUB Female Dual Row IDC Inner Button Type(stamped Pin)

ROHS COMPLIANT

Material (材料):

Housing (塑胶): Temperature Thermoplastics, PBT+G.F UL 94V-0

Contact (端子): Brass or Bronze

Shell (壳): 0.35T Steel Nickel Plating All Area

Electical Characteristics (电气性能):

Current Rating (额定电流): 5A

Contact Resistance (接触阻抗): 20 milliohms Max

Withstanding Voltage (耐电压): 500V AC For 1 Minute

Insulation Resistance (绝缘阻抗): 1000 Megohms Min


Operating Temperature: (温度范围): -55° C to +105° C

Ordering Code:

DIDC01 - $\frac{F}{1}$ - $\frac{X}{2}$ - $\frac{S}{3}$ - $\frac{X}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$

- ① Dual Row IDC Type
- ② Contact Type:
F:Female
- ③ Contact NO.:
09=09pin
15=15pin
25=25pin
37=37pin
- ④ Contact Plating
S: Selective Gold
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
- ⑤ Color Code:
L:Blue
B:Black
- ⑥ Other Option:
A: With S/R(Standard)
B: Without S/R

	09pin	15pin	25pin	37pin
A	16.33	24.66	38.38	54.84
B	24.99	33.32	47.04	63.50
C	30.80	39.10	53.00	69.30
D	22.40	30.80	44.50	61.40
E	12.08	19.70	32.40	47.72

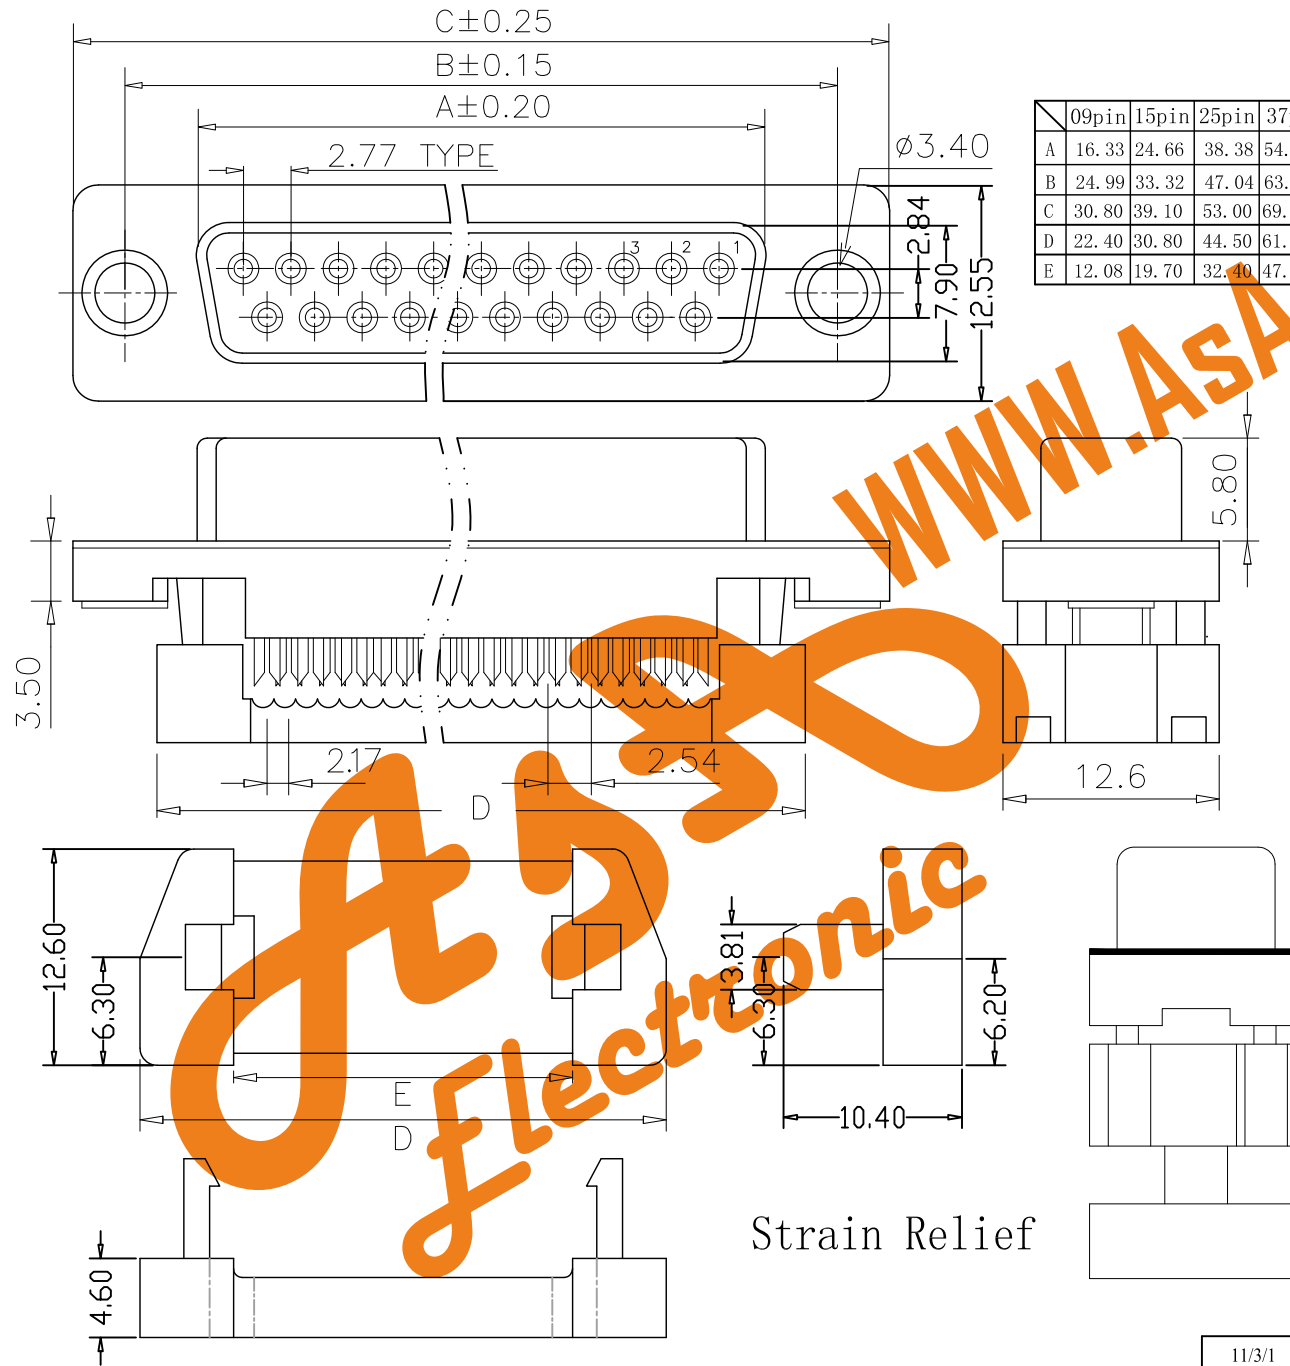

Strain Relief

Unless Otherwise specified tolerance

X±0.35
X.X±0.25
X.XX±0.20
X.XXX±0.15

SCALE: 1:1


UNIT:
mm

DRAWN: junfon H

CHECKED: YANG

11/3/1

DATE



AsA WWW.AsA-Elec.com
Electronic

AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

TITLE:
D-SUB Female Dual Row IDC
Inner Button Type(stamped Pin)

DRAWING NO: DIDC01-FXXXX

PRODUCT NO: DIDC01-FXXXX