


ROHS COMPLIANT

2V2 FEMALE SOLDER WATERPROOF TYPE

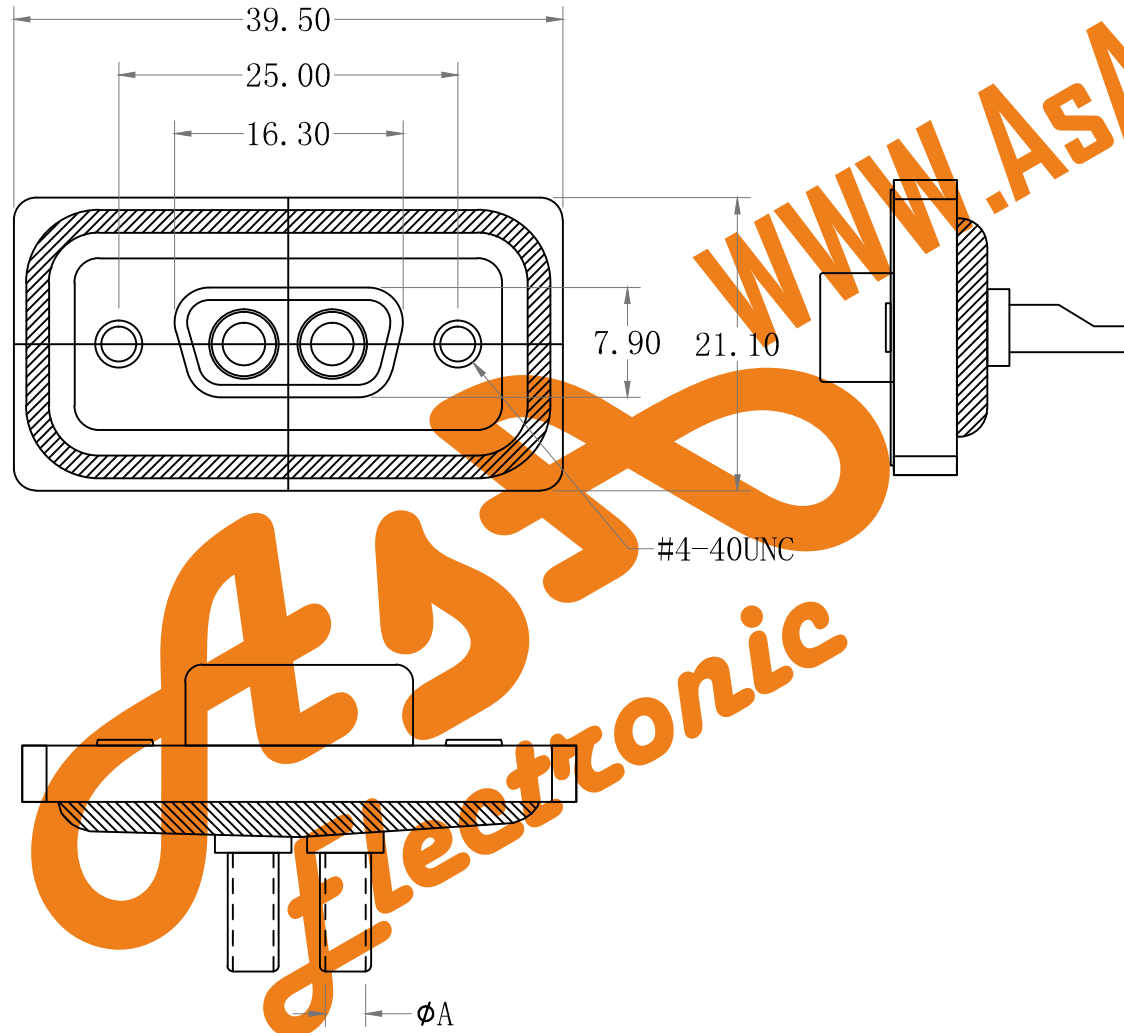

ELECTRICAL CHARACTERISTICS

Contact Current Rating:5Amperes.
 Dielectric Withstanding.
 Dielectric Withstanding Voltage:AC 1000Vr. m. s.
 Insulation Resistance:500 Megohms Minimum at DC500V.
 Contact Resistance:25 Milliohms Maximum.
 Operating Temperature:-55℃~105℃.

MATERIALS:

Contacts:Brass.
 Insulator:PBT, UL94V-0 Rated.
 Shell: Cold Rolle Steel.
 Metal Watertight Frame:PBT, UL94V-0.
 O-Ring:Silicone.

NOTE:

Position:09PIN, 15PIN, 25PIN, 37PIN.

Ordering Code:

WPDB2V2 - F - XX - XX - X - XX
 ① ② ③ ④ ⑤ ⑥

- ① Series 2V2
- ② Contact Type:
M:Male F:Female
- ③ Contact NO. :
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold
- ④ Insulation Color Code:
B:Black L:Blue
W:White
- ⑤ Locked Type:
B: Rivet #4-40
C: Rivet & Rack Screw Attached
D: Rivet & Jack Screw Insert
- ⑥ Power AMP (ΦA) :
10 = 10AMP = 1.70mm
20 = 20AMP = 2.70mm
30 = 30AMP = 3.60mm

Unless Otherwise specified tolerance
 X:±0.35
 X.X:±0.25
 X.XX:±0.20
 X.XXX:±0.15

AsA **Electronic** **Co.**
 WWW.AsA-Elec.com
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

SCALE: 2:1 UNIT: mm

DRAWN: junfon H
 CHECKED: YANG

12/8/1
 DATE

3rd ANGLE PROJECTION

TITLE:
 2V2 FEMALE SOLDER WATERPROOF TYPE

DRAWING NO: WPDB2V2-FXXXXXX
 PRODUCT NO: WPDB2V2-FXXXXXX

REV	DESCRIPTION	DATE
1	Add option of plating	12/8/1