


Coaxial D-SUB 2W2 MALE Solder Cup

ROHS COMPLIANT

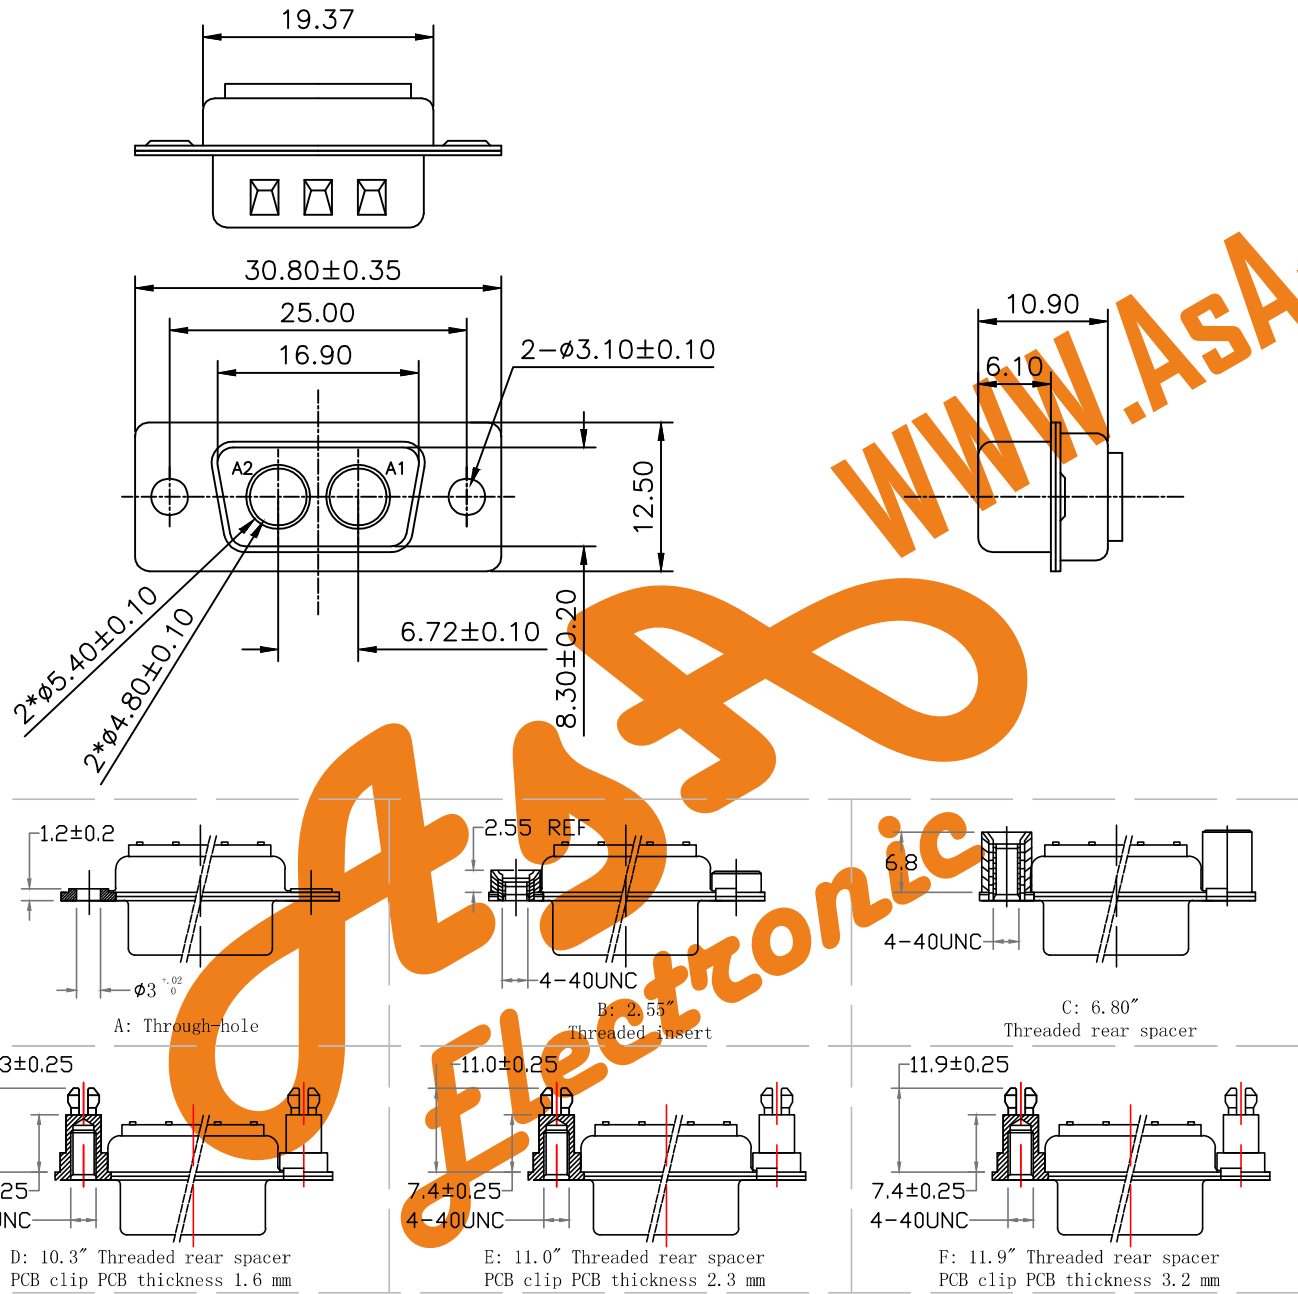


ELECTRICAL CHARACTERISTICS:
 Dielectric withstanding Voltage: AC 1000V r.m.s.
 Insulation Resistance: 500 Megohms Minimum at DC 500V
 Contact Resistance: 25 Milliohms
 Operating Temperature: -20°C~+85°C

MATERIALS:
 Insulator: PBT, UL 94V-0 Rated
 Shell: Cold Roller Steel

Ordering Code:

PDC2W2	-M	-G0	-B	-X	-00
①	②	③	④	⑤	⑥

- ① Series
- ② Contact Type:
M:Male F:Female
- ③ Contact NO. :
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold
- ④ Insulation Color Code:
B:Black L:Blue
W:White
- ⑤ Mounting Option:
A: Through-hole
B: 2.55" Threaded insert
C: 6.80" Threaded rear spacer
D: 10.3" Threaded rear spacer
E: 11.0" Threaded rear spacer
F: 11.9" Threaded rear spacer
PCB clip
- ⑥ Series

Unless Otherwise specified tolerance		 WWW.AsA-Elec.com AsA Electronic Co. Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02
X.±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15		
SCALE: 1:1	UNIT: mm	TITLE: Coaxial D-SUB 2W2 MALE Solder Cup
DRAWN: junfon H	CHECKED: YANG	DRAWING NO: PDC2W2-MXXXX00
		PRODUCT NO: PDC2W2-MXXXX00

		Add option of plating			12/7/17
REV		DESCRIPTION			DATE
1	2	3	4	5	6

