


ROHS COMPLIANT

# Coaxial D-SUB 5W5 FEMALE Solder Cup

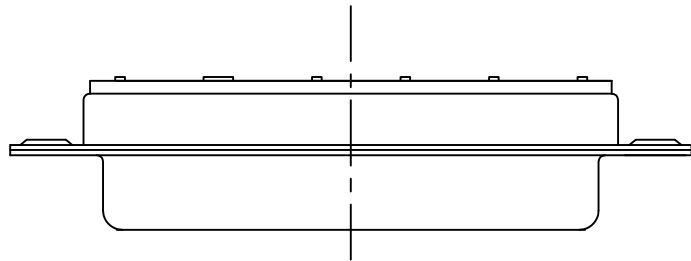

WWW.ASA-Elec.com

### ELECTRICAL CHARACTERISTICS:

Dielectric withstanding Voltage: AC 1000V r.m.s.  
 Insulation Resistance: 500 Megohms Minimum at DC 500V  
 Contact Resistance: 25 Milliohms  
 Operating Temperature: -20°C~+85°C

### MATERIALS:

Insulator: PBT, UL 94V-0 Rated  
 Shell: Cold Roller Steel

### Ordering Code:


PDC5W5    -F    -G0    -B    -00  
 ①        ②        ③        ④

① Series

② Contact Type:  
 M:Male F:Female

③ Contact NO. :  
 G0: Gold flash G1: 3u" Gold  
 G2: 5u" Gold G3: 10u" Gold  
 G4: 15u" Gold G5: 30u" Gold

④ Insulation Color Code:  
 B:Black L:Blue  
 W:White

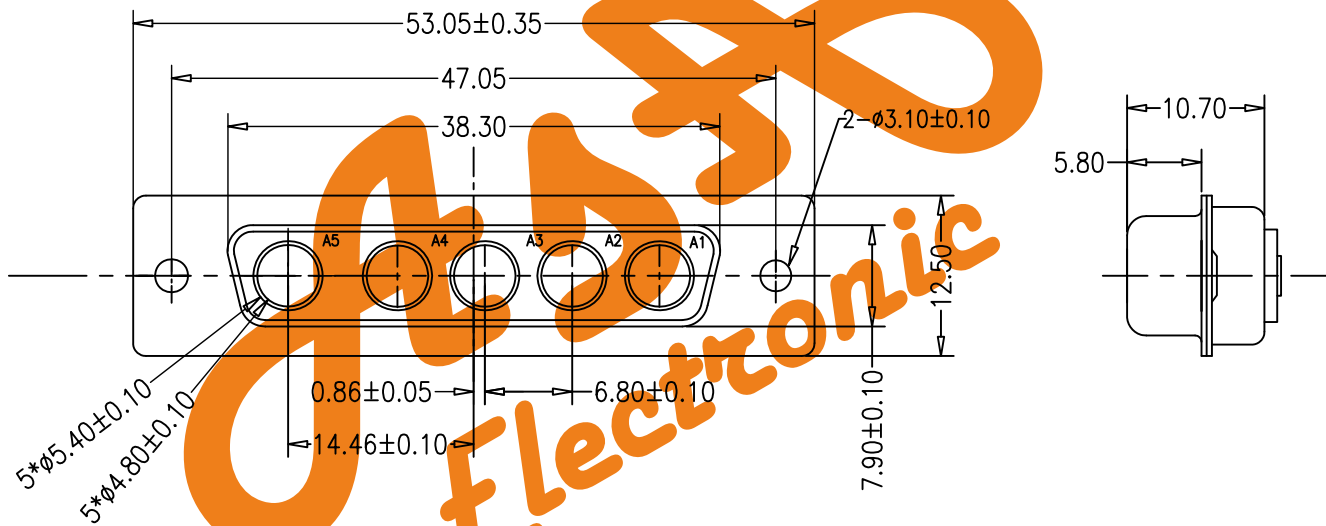

Unless Otherwise specified tolerance  
 X.±0.35  
 X.X±0.25  
 X.XX±0.20  
 X.XXX±0.15


WWW.ASA-Elec.com  
**ASA**  
*Electronic*  
**ASA Electronic Co.**  
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

SCALE: 1:1    UNIT: mm

DRAWN: junfon H

CHECKED: YANG

TITLE:  
 Coaxial D-SUB 5W5 FEMALE Solder Cup



DRAWING NO: PDC5W5-FXXXX00

PRODUCT NO: PDC5W5-FXXXX00

		Add option of plating		12/7/17
REV		DESCRIPTION		DATE