

ROHS COMPLIANT

PLCC DIP TYPE


NOTE:

一. MATERIAL:

- 1 INSULATOR:PPS GLASS FILLED UL 94V-0
- 2 CONTACTS:PHOS PHOR BRONZE

二. ELECTRICAL CHARACTERISTICS;

- 1 CONTACT RESISTANCE:20mΩ MAXIMUM
- 2 CONTACT CURRENT RATING:1. A MAX
- 3 DIELECTRIC WITHSTANDING VOLTAGE:600 VAC/MINUTE
- 4 INSULATION RESISTANCE 5000 MEGOHMS MIN
- 5 OPERATING TEMPERATURE:-55° C ~ 105° C

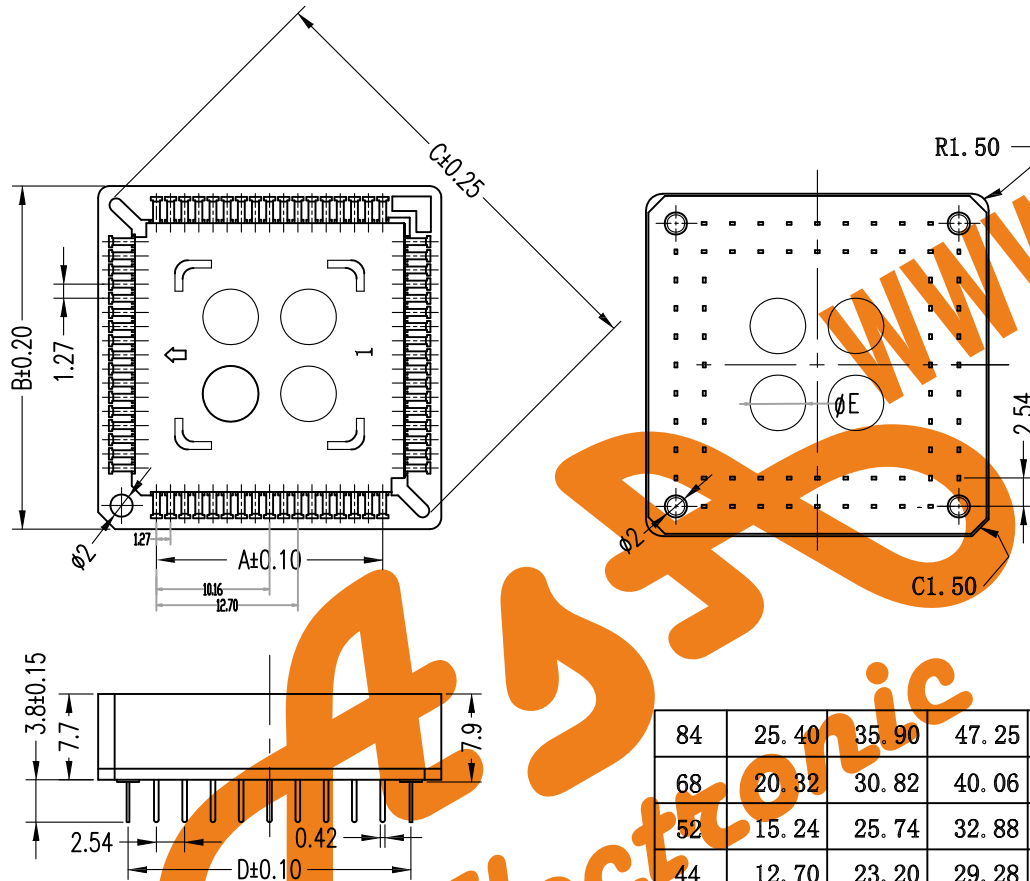

Ordering Code:

PLCS02 - X - P - X - X - X
 ① ② ③ ④ ⑤ ⑥

① Series No:

⑤ Contact Plating

② Color Insulator

- B:Black
- C:Coffee
- D:Brown

- S0: Gold flash
- S1: 3u" Gold/Ni
- S2: 5u" Gold/Ni
- S3: 10u" Gold/Ni
- S4: 15u" Gold/Ni
- S5: 30u" Gold/Ni
- SN: Tin

③ Insulator Material:
P:PPS

④ Contact Number:

- A:28 B:32
- C:44 D:52
- E:68 F:84

⑥ Packing

- A:Tray B:Bag C:Tube D:Tape Reel

84	25.40	35.90	47.25	30.48	4-Ø6
68	20.32	30.82	40.06	25.40	4-Ø5
52	15.24	25.74	32.88	20.32	4-Ø4
44	12.70	23.20	29.28	17.78	4-Ø3
32	10.16	18.04	23.89	15.24	1-Ø3
28	7.62	18.04	22.10	12.70	1-Ø3
CKT	A	B	C	D	E
SIEZ	DIMENSION				

Unless Otherwise specified tolerance		 WWW.AsA-Elec.com AsA Electronic Co. Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02
X.±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15	SCALE: 1:1	
	UNIT: mm	

DRAWN: jnufon	TITLE: PLCC DIP TYPE
CHECKED: yan	
APPROVED	DRAWING NO: PLCS02-XPXXX
DATE	PRODUCT NO: PLCS02-XPXXX

REV	2	Add option of plating	11/3/1
		DESCRIPTION	DATE