
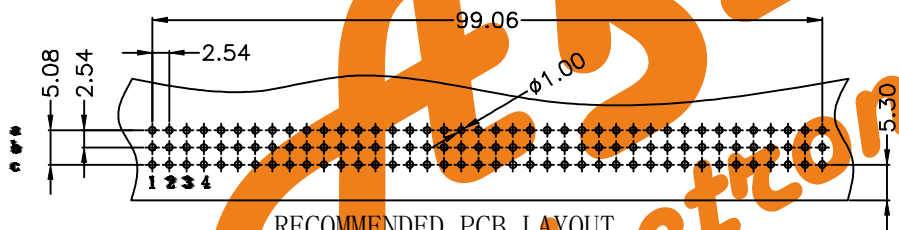
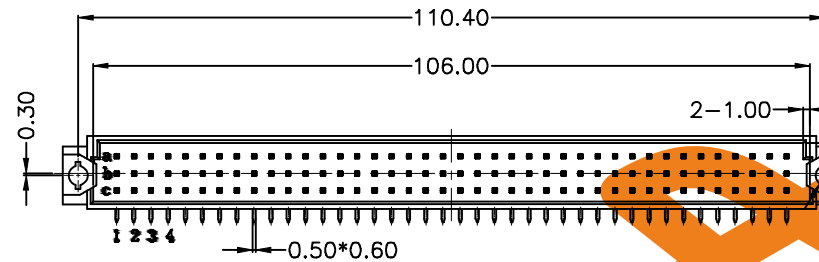



HSF

RoHS

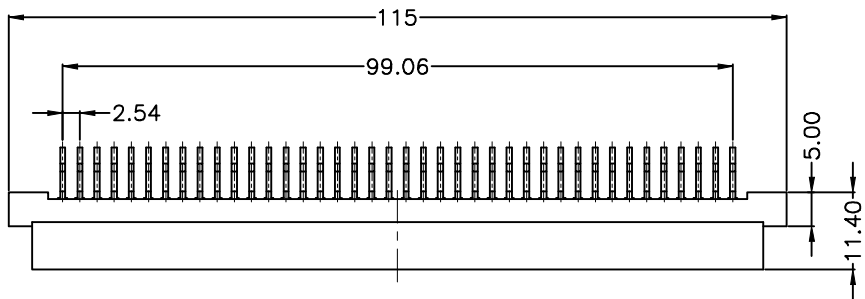

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

1. Material And Plating:

1.1 Housing: PBT+5%PC UL94V-0

1.2 Contacts: Brass

1.3 Contact Plating:

G=Gold flash plated all over, Ni under plated all over

T= Tin plated all over, Ni under plated all over

S=Gold flash plated on contact area, Tin PLATED ON SOLDER TAIL, Ni under plated all over

2. Electrical Characteristic:

2.1 Current rating: 2 AMPS

2.2 Contact resistance: 20 mohms

2.3 Insulation resistance: 1000 mohms min@500V DC

2.4 Dielectric withstanding voltage: 1000V AC/minute

Ordering Code:

DMR - 120 - A - J - X - 502

① ② ③ ④ ⑤

① Series No:

⑤ Contact Plating

G0: Gold flash

S0: Gold flash/Ni

G1: 3u" Gold

S1: 3u" Gold/Ni

G2: 5u" Gold

S2: 5u" Gold/Ni

G3: 10u" Gold

S3: 10u" Gold/Ni

G4: 15u" Gold

S4: 15u" Gold/Ni

G5: 30u" Gold

S5: 30u" Gold/Ni

SN: Tin

② No. of Contacts  
120P

③ Termination  
A: Right tail length  
H=3.0mm

④ Rows Loaded With Contacts  
J: Row a+b+c

Unless Otherwise specified tolerance


WWW.AsA-Elec.com  
**AsA Electronic Co.**  
Tel: (+98) 21 66 73 56 82 Mob: (+98) 912 03 161 02

SCALE: As Shown	UNIT: mm
DRAW Robin	DATE 05/14/2015
CHECK BobYang	DATE 05/14/2015

TITLE: Right Angle Plug Type C  
Connectors 120 Positions

DRAWING NO: DMR-120-AJX-502

PRODUCT NO: DMR-120-AJX-502



REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		