


D-SUB Female Dual Row Solder Type (stamped Pin)

ROHS COMPLIANT

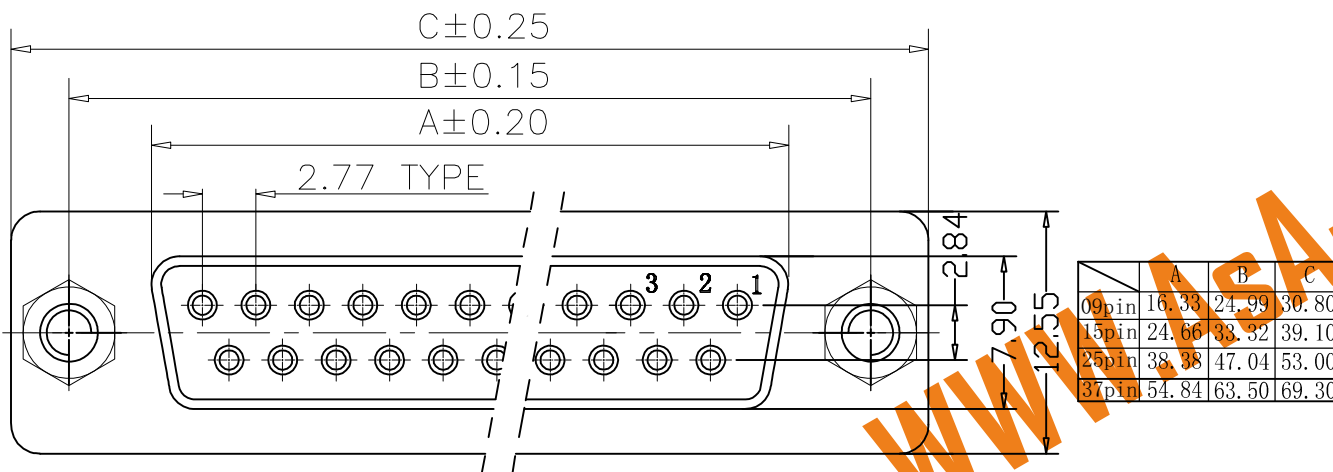

Material (材料):

Housing (塑胶): Temperature Thermoplastics, PBT+G.F UL 94V-0
 Contact (端子): Brass or Bronze
 Shell (壳): 0.35T Steel Nickel Plating All Area



Electical Characteristics (电气性能):

Current Rating (额定电流): 5A
 Contact Resistance (接触阻抗): 20 milliohms Max
 Withstanding Voltage (耐电压): 500V AC For 1 Minute
 Insulation Resistance (绝缘阻抗): 1000 Megohms Min
 Operating Temperature (温度范围): -55° C to +105° C

Ordering Code:

DB01 - F - X - A - 0 - B - S
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Dual Row Solder Type
- ② Contact Type:
F:Female
- ③ Contact NO. :
09=09pin 15=15pin
25=25pin 37=37pin
- ④ Mounting Option:
A: No accessories
B: Rear Rivet
C: Front Rivet
D: Groundstand-off on real shell
E: Front rivet+Groundstand-off on real shell
- ⑤ Accessories:
0:Non Accessories
A: Zinc alloy 4.8mm Nickel
Al:Zinc alloy 5.8mm Nickel
B: Iron 4.8mm Nickel
Bl:Iron 5.8mm Nickel
C: Copper alloy 4.8mm Nickel
Cl:Copper alloy 5.8mm Nickel
D: Copper screw 4.8mm Nickel
Dl:Copper screw 5.8mm Nickel
- ⑥ Color Code:
W:White L:Blue
B:Black G:Grey
- ⑦ Contact Plating
S: Selective Gold
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold

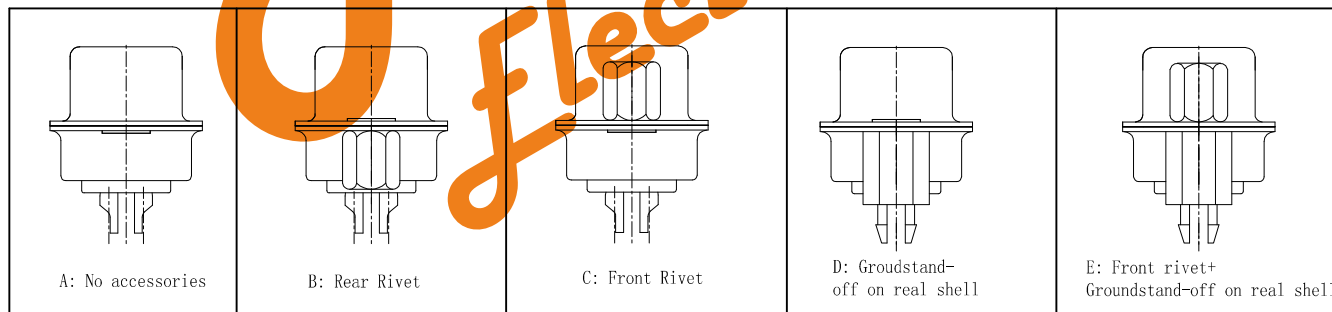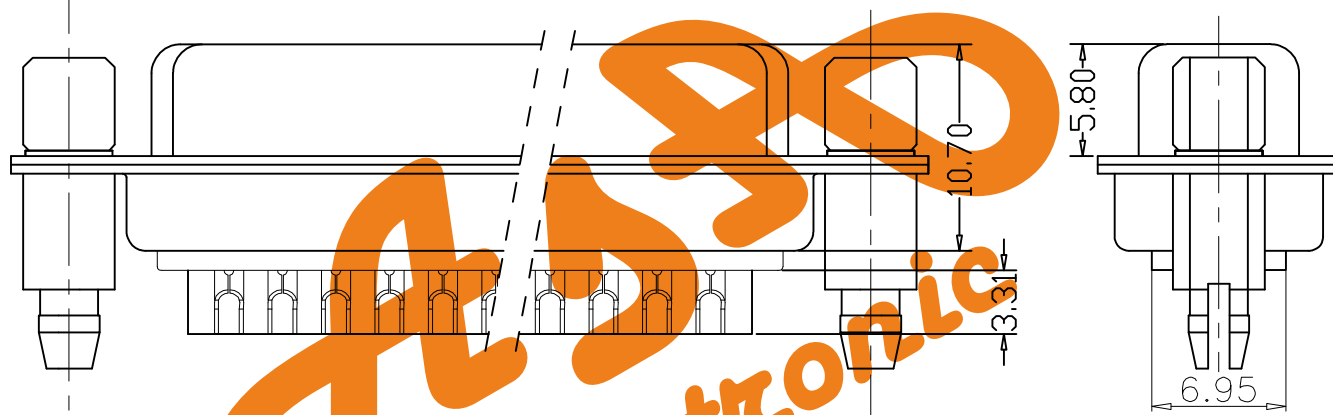

Unless Otherwise specified tolerance			<p>WWW.AsA-Elec.com</p> <p>AsA Electronic Co.</p> <p>Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02</p>
X:±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15	DATE: 11/3/1	SCALE: 1:1	
UNIT: mm	DRAWN: junfon H		TITLE: D-SUB Female Dual Row Solder Type (stamped Pin)
CHECKED: YANG			DRAWING NO: DB01-FXXXXX
			PRODUCT NO: DB01-FXXXXX