


D-SUB Female Three Row 50 Pin(Pitch:2.77mm)Solder Type(stamped Pin)

ROHS COMPLIANT

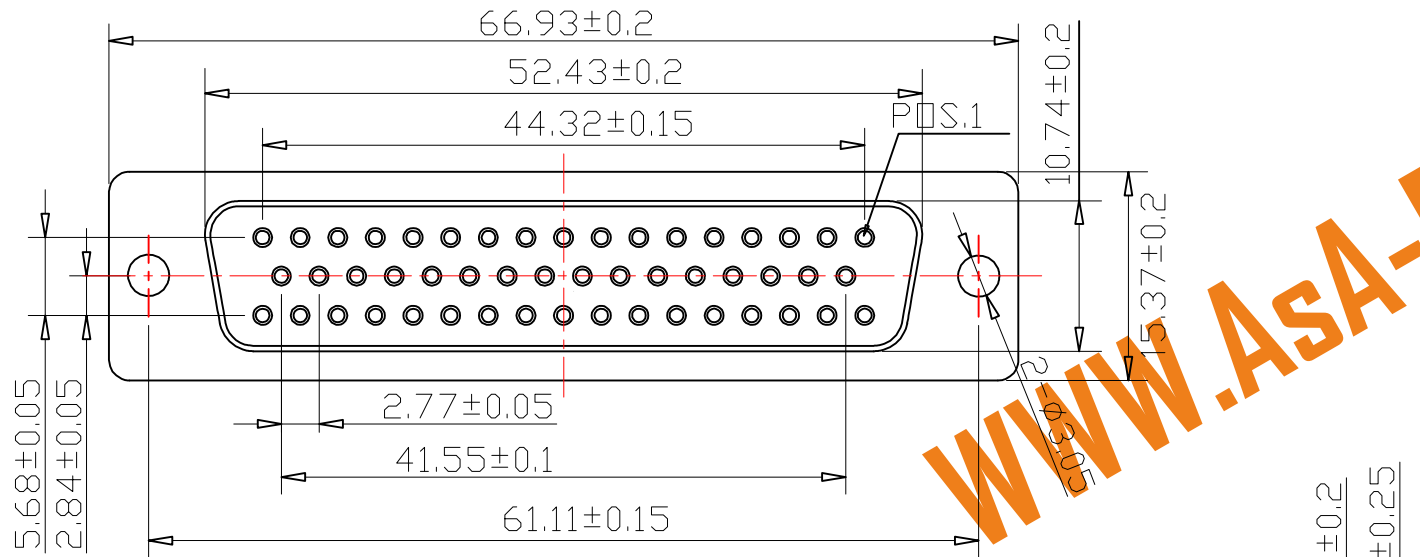

Material (材料):

Housing(塑胶): Temperature Thermoplastics,PBT+G.F UL 94V-0
 Contact(端子): Brass or Bronze
 Shell(壳): 0.35T Steel Nickel Plating All Area



Electical Characteristics(电气性能):

Current Rating(额定电流): 5A
 Contact Resistance(接触阻抗): 20 milliohms Max
 Withstanding Voltage(耐电压): 500V AC For 1 Minute
 Insulation Resistance(绝缘阻抗): 1000 Megohms Min
 Operating Temperature:(温度范围): -55° C to +105° C

Ordering Code:

DB02 - F - 50 - A - 0 - B - S
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Three Row Straight DIP(Pitch:2.77mm)
- ② Contact Type:
F:Female
- ③ Contact NO. :
50=50pin
- ④ Mounting Option:
A: No accessories
B: Rear Rivet
C: Front Rivet
D: Groundstand-off on real shell
E: Front rivet+Groundstand-off on real shell
- ⑤ Accessories:
0: Non Accessories
A: Zinc alloy 4.8mm Nickel
A1:Zinc alloy 5.8mm Nickel
B: Iron 4.8mm Nickel
B1:Iron 5.8mm Nickel
C: Copper alloy 4.8mm Nickel
C1:Copper alloy 5.8mm Nickel
D: Copper screw 4.8mm Nickel
D1:Copper screw 5.8mm Nickel
- ⑥ Color Code:
W:White L:Blue
B:Black G:Grey
- ⑦ Contact Plating
S: Selective Gold
G0: Gold Flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold

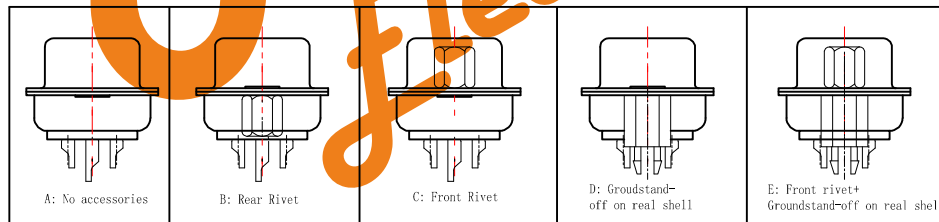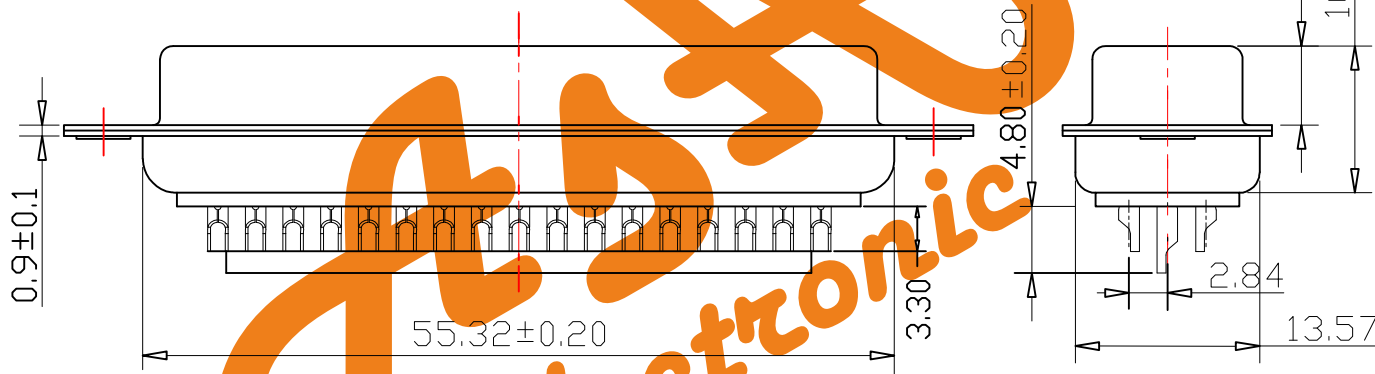

Unless Otherwise specified tolerance		 WWW.ASA-Elec.com ASA Electronic Co. Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02
X.±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15		
SCALE: 1:1	UNIT: mm	TITLE: D-SUB Female Three Row 50Pin (Pitch:2.77mm)Solder Type(stamped Pin)
DRAWN: junfon H		
CHECKED: YANG		DRAWING NO: DB02-F50XXXX PRODUCT NO: DB02-F50XXXX
DATE: 11/3/1 		

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		
7		
8		