




ROHS COMPLIANT

MATERIAL:

- 1. Insulator: PBT+30%Glass Fiber (UL94V-0)
- 2. Contact: Brass
- 3. Contact Plated: Gold Flash over Nickel
- 4. Shell: steel, Nickel Plated

SPECIFICATION:

- 1. Current Rating: 1A, 5A
- 2. Insulation Resistance: 1000M MIN At 500VDC
- 3. Dielectric Strength: 500V for one minute
- 4. Operation Temperature: -55 ~ +105
- 5. The connector is suitable for 22~24 AWG Wire soldering

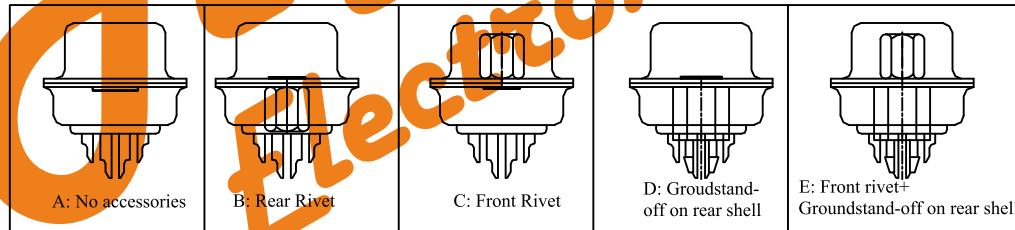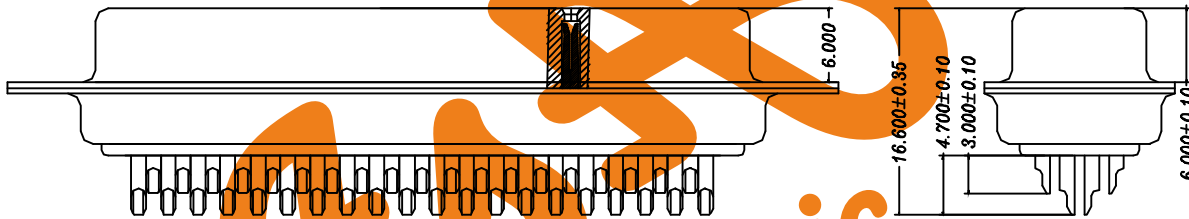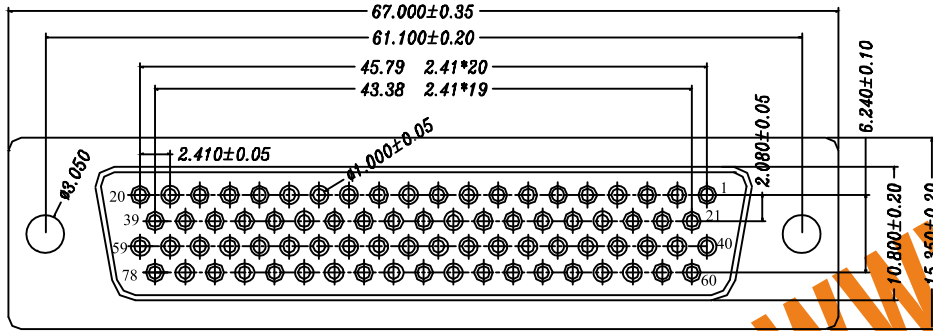

Ordering Code:

HDD02 - F - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Three Row Solder Type
- ② Contact Type:
F:Female
- ③ Contact NO.:
78=78pin
- ④ Mounting Option:
A: No accessories
B: Rear Rivet
C: Front Rivet
D: Groudstand-off on rear shell
E: Front rivet+Groundstand-off on rear shell

⑤ Accessories:

- O: Non Accessories
- A: Zinc alloy 4.8mm Nickel
- A1: Zinc alloy 5.8mm Nickel
- B: Iron 4.8mm Nickel
- B1: Iron 5.8mm Nickel
- C: Copper alloy 4.8mm Nickel
- C1: Copper alloy 5.8mm Nickel
- D: Copper screw 4.8mm Nickel
- D1: Copper screw 5.8mm Nickel

⑥ Color Code:

- W: White L: Blue
- B: Black G: Grey

⑦ Contact Plating

- S: Selective Gold
- G0: Gold flash G1: 3u" Gold
- G2: 5u" Gold G3: 10u" Gold
- G4: 15u" Gold G5: 30u" Gold

Unless Otherwise specified tolerance
 X:±0.35
 X.X:±0.25
 X.XX:±0.20
 X.XXX:±0.15



AsA Electronic Co.

Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

SCALE: 1:1

UNIT:
mm

DRAWN: huangzhen

TITLE: D-SUB Female Four Row Solder Type (stamped Pin)

CHECKED: YANG

DRAWING NO: HDD02-FXXXXX

PRODUCT NO: HDD02-FXXXXX



REV	Add option of plating	13/12/19
	DESCRIPTION	DATE