
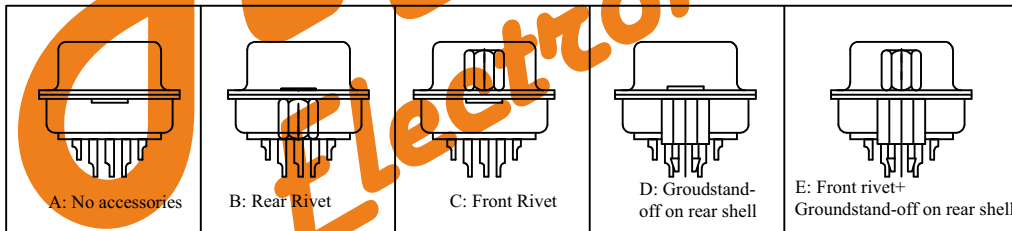
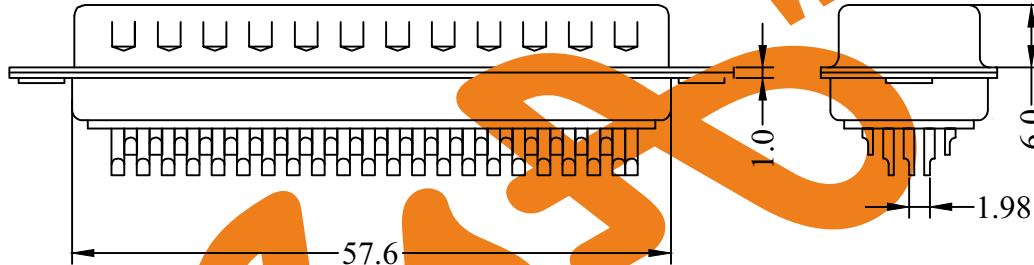


ROHS COMPLIANT

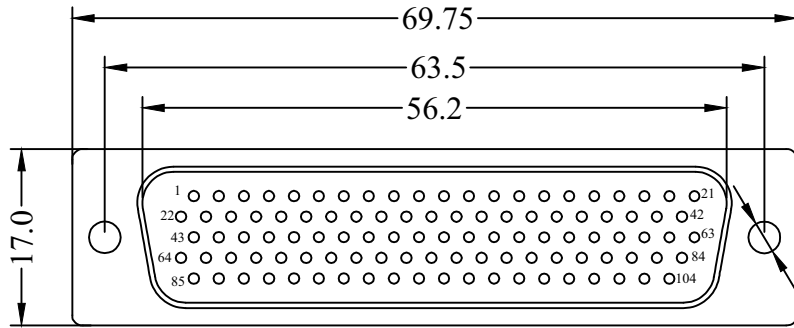

MATERIALS AND FINISH

SHELL: steel material front shell nickel finished

back shell tin finished dimples on plug only

INSULATOR: PBT thermoplastic 30% glass

filled UL 94V-0 rated black color

CONTACT MATERIAL: brass

HIGH POWER CONTACT MATERIAL:

BRASS 50u gold plated

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING: 5.0A

CONTACT RESISTANCE: 30 milliohms max

ELECTRIC WITHSTANDING VOLTAGE: 1000 V AC MIN

INSULATION RESISTANCE: 5000 megaohms min

TEMPERATURE RATING : -55 +~105

Ordering Code:

HDD03 - M - X - X - X - X - X

① Three Row Solder Type

② Contact Type:
M: Male

③ Contact NO.:
104=104pin



④ Mounting Option:
A: No accessories
B: Rear Rivet
C: Front Rivet
D: Groundstand-off on rear shell
E: Front rivet+Groundstand-off on rear shell

⑤ Accessories:

O: Non Accessories
A: Zinc alloy 4.8mm Nickel
A1: Zinc alloy 5.8mm Nickel
B: Iron 4.8mm Nickel
B1: Iron 5.8mm Nickel
C: Copper alloy 4.8mm Nickel
C1: Copper alloy 5.8mm Nickel
D: Copper screw 4.8mm Nickel
D1: Copper screw 5.8mm Nickel

⑥ Color Code:
W: White L: Blue
B: Black G: Grey

⑦ Contact Plating
S: Selective Gold
G0: Gold flash G1 :3u" Gold
G2 :5u" Gold G3 :10u" Gold
G4 :15u" Gold G5 :30u" Gold

Unless Otherwise specified tolerance		 <p>WWW.AsA-Elec.com</p> <p>AsA Electronic Co.</p> <p>Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02</p>
SCALE: 1:1	UNIT: mm	
DRAWN: huangzhen		TITLE: D-SUB male 5 row high density solder 104P(stamped pin)
CHECKED: YANG		DRAWING NO: HDD03-MXXXXX
		PRODUCT NO: HDD03-MXXXXX

REV	Add option of plating	13/12/19
	DESCRIPTION	DATE