
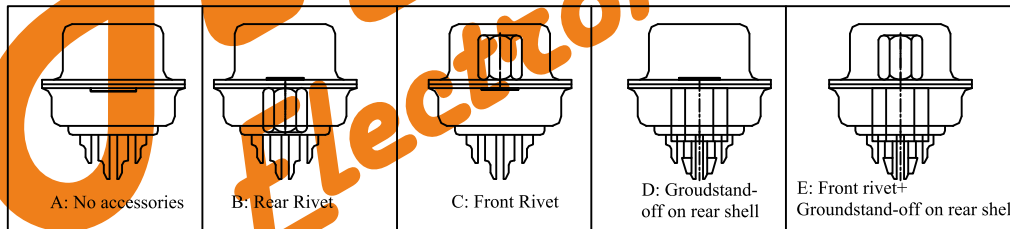
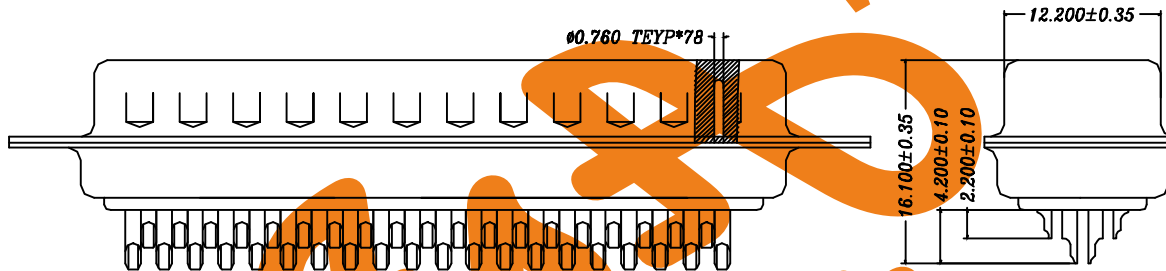


ROHS COMPLIANT

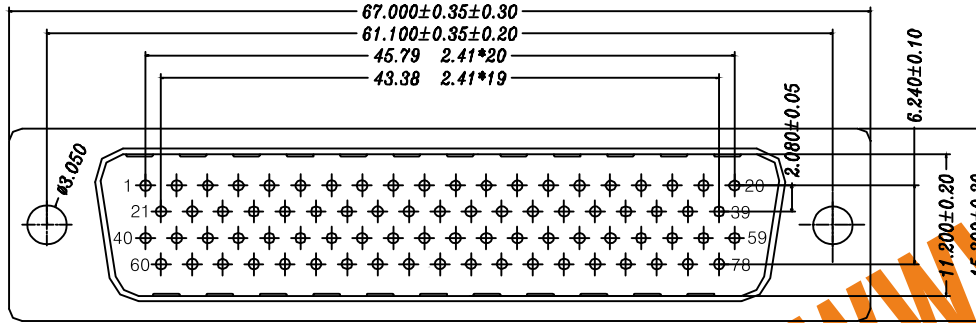

Material(: A):

Housing(BS : PBT+30% Glass Fiber(UL94V-0) Black

Contact(M. A : Brass Gold flash over Nickel

Shell(: Steel Nickel Plating

Electical Characteristics(HS):

Current Rating(. H : 5A

Contact Resistance(i, : 20 milliohms Max

Withstanding Voltage(RH : 500V AC For 1 Minute

Insulation Resistance(i, : 1000 Megohms Min

Operating Temperature:(U : -55°C to +105°C

Salt spray requirements(

Gold-plated copper:45h NSS

Copper(Steel)nickel:24h NSS

The connector is suitable for Wire soldering

Ordering Code:

HDD02 - M - X - X - X - X - X



① Three Row Solder Type

② Contact Type:
M:Male

③ Contact NO.:
78=78pin

④ Mounting Option:
A: No accessories
B: Rear Rivet
C: Front Rivet
D: Groudstand-off on rear shell
E: Front rivet+Groundstand-off on rear shell

⑤ Accessories:

- O:Non Accessories
- A: Zinc alloy 4.8mm Nickel
- A1:Zinc alloy 5.8mm Nickel
- B: Iron 4.8mm Nickel
- B1:Iron 5.8mm Nickel
- C: Copper alloy 4.8mm Nickel
- C1:Copper alloy 5.8mm Nickel
- D: Copper screw 4.8mm Nickel
- D1:Copper screw 5.8mm Nickel

⑥ Color Code:

- W:White L:Blue
- B:Black G:Grey

⑦ Contact Plating

- S: Selective Gold
- G0: Gold flash G1: 3u" Gold
- G2: 5u" Gold G3: 10u" Gold
- G4: 15u" Gold G5: 30u" Gold

Unless Otherwise specified tolerance X:±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15		 ASA Electronic Co. WWW.ASA-Elec.com Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02
SCALE: 1:1	UNIT: mm	
DRAWN: huangzhen		TITLE: D-SUB Male Four Row Solder Type (stamped Pin)
CHECKED: YANG		DRAWING NO: HDD02-MXXXXX
 3rd ANGLE PROJECTION		PRODUCT NO: HDD02-MXXXXX

REV		Add option of plating	13/12/20
		DESCRIPTION	DATE