



D-SUB Male Dual Row Solder Type (stamped Pin)

ROHS COMPLIANT

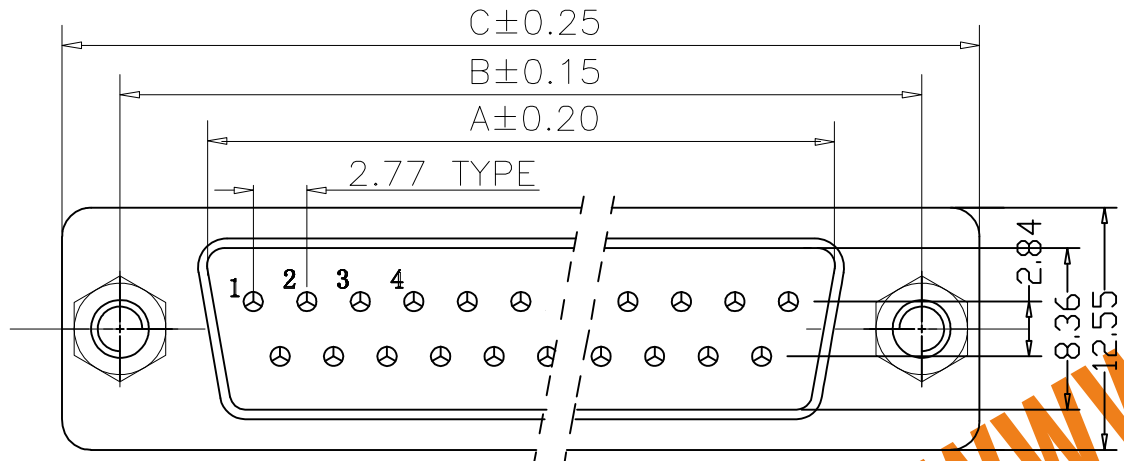

	A	B	C
09pin	16.92	24.99	30.80
15pin	25.25	33.32	39.10
25pin	38.96	47.04	53.00
37pin	55.42	63.50	69.30

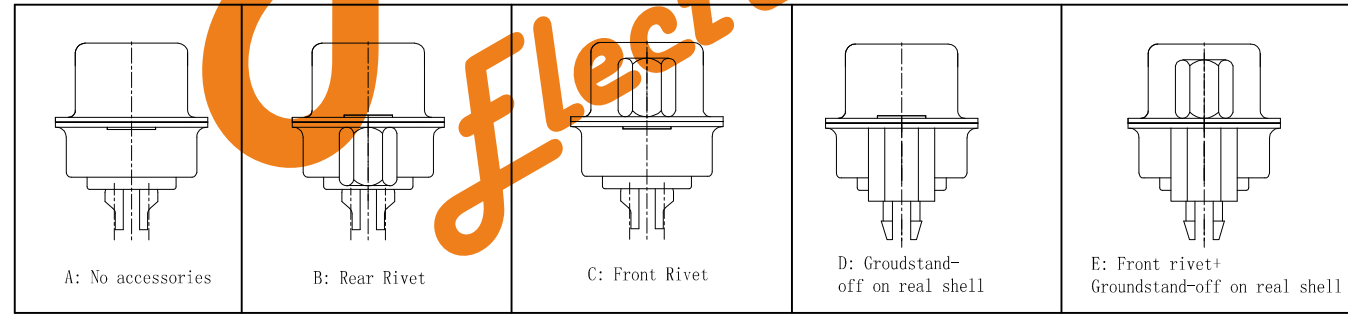

Material (材料):

Housing (塑胶): Temperature Thermoplastics, PBT+G.F UL 94V-0
 Contact (端子): Brass or Bronze
 Shell (壳): 0.35T Steel Nickel Plating All Area

Electical Characteristics (电气性能):

Current Rating (额定电流): 5A
 Contact Resistance (接触阻抗): 20 milliohms Max
 Withstanding Voltage (耐电压): 500V AC For 1 Minute
 Insulation Resistance (绝缘阻抗): 1000 Megohms Min
 Operating Temperature (温度范围): -55° C to +105° C

Ordering Code:

DB01 - M - X - A - A - B - S
 ① ② ③ ④ ⑤ ⑥ ⑦


- ① Dual Row Straight DIP
- ② Contact Type:
M: Male
- ③ Contact NO.:
09=09pin 15=15pin
25=25pin 37=37pin
- ④ Mounting Option:
A: No accessories
B: Rear Rivet
C: Front Rivet
D: Groundstand-off on real shell
E: Front rivet+Groundstand-off on real shell
- ⑤ Accessories:
0: Non Accessories
A: Zinc alloy 4.8mm Nickel
Al: Zinc alloy 5.8mm Nickel
B: Iron 4.8mm Nickel
Bl: Iron 5.8mm Nickel
C: Copper alloy 4.8mm Nickel
Cl: Copper alloy 5.8mm Nickel
D: Copper screw 4.8mm Nickel
Dl: Copper screw 5.8mm Nickel
- ⑥ Color Code:
W: White L: Blue
B: Black G: Grey
- ⑦ Contact Plating
S: Selective Gold
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold

Unless Otherwise specified tolerance
 X.±0.35
 X.X:±0.25
 X.XX:±0.20
 X.XXX:±0.15

AsA Electronic WWW.AsA-Elec.com
AsA Electronic Co.
 Tel: (+98) 21 66 73 56 82 Mob: (+98) 912 03 161 02

DATE: 11/3/1 SCALE: 1:1 UNIT: mm
 DRAWN: junfon H
 CHECKED: YANG

TITLE: D-SUB Male Dual Row Solder Type (stamped Pin)



DRAWING NO: DB01-MXXXXX
 PRODUCT NO: DB01-MXXXXX