
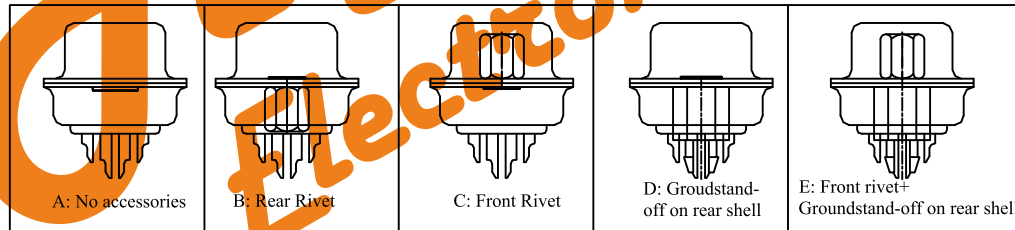
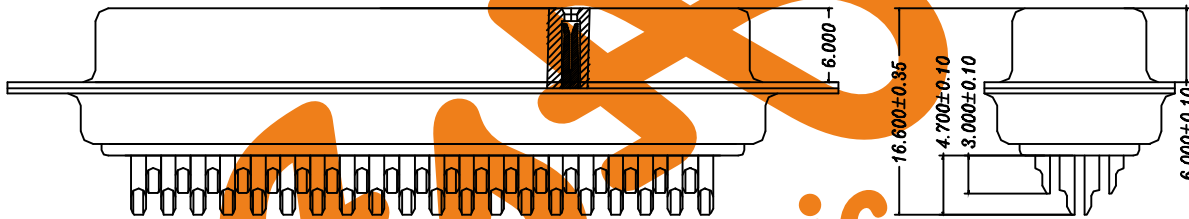


ROHS COMPLIANT

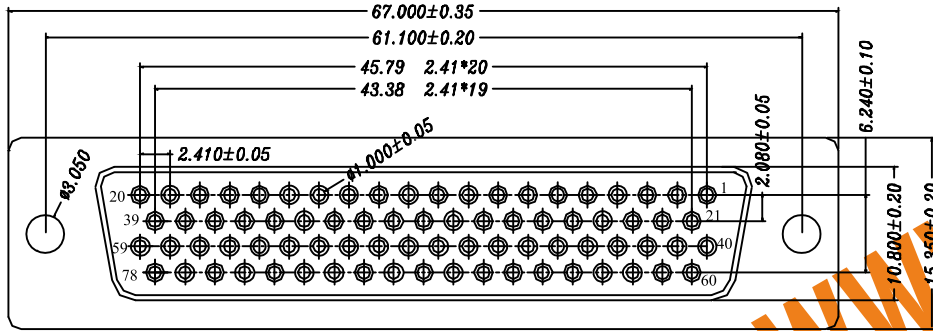

MATERIALS AND FINISH

SHELL: STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
BACK SHELL NICKEL FINISHED

INSULATOR: PBT THERMOPLASTIC, 30% GLASS
FILLED, UL 94V-0 RATED, WHITE COLOR

CONTACT MATERIAL: BRASS
CONTACT FINISH: FULL 2u" GOLD

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
CONTACT RESISTANCE : 30 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN
INSULATION RESISTANCE : 5000 MEGAOHMS MIN
TEMPERATURE RATING : -55°C ~ +105°C

Ordering Code:

MHDB01 - F - X - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Four Row Machin Pin Solder Type
- ② Contact Type: F:Female
- ③ Contact NO.: 78=78pin
- ④ Mounting Option:
A: No accessories
B: Rear Rivet
C: Front Rivet
D: Groudstand-off on rear shell
E: Front rivet+Groundstand-off on rear shell
- ⑤ Accessories:
O:Non Accessories
A: Zinc alloy 4.8mm Nickel
A1:Zinc alloy 5.8mm Nickel
B: Iron 4.8mm Nickel
B1:Iron 5.8mm Nickel
C: Copper alloy 4.8mm Nickel
C1:Copper alloy 5.8mm Nickel
D: Copper screw 4.8mm Nickel
D1:Copper screw 5.8mm Nickel
- ⑥ Color Code:
W:White L:Blue
B:Black G:Grey
- ⑦ Contact Plating
S: Selective Gold
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold

Unless Otherwise specified tolerance X:±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15		 AsA Electronic Co. WWW.AsA-Elec.com Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02
SCALE: 1:1	UNIT: mm	
DRAWN: huangzhen		TITLE: D-SUB Female Four Row Solder Type (stamped Pin)
CHECKED: YANG		DRAWING NO: HDD02-FXXXXXX
 3rd ANGLE PROJECTION		PRODUCT NO: HDD02-FXXXXXX

REV	Add option of plating	13/12/19
	DESCRIPTION	DATE