
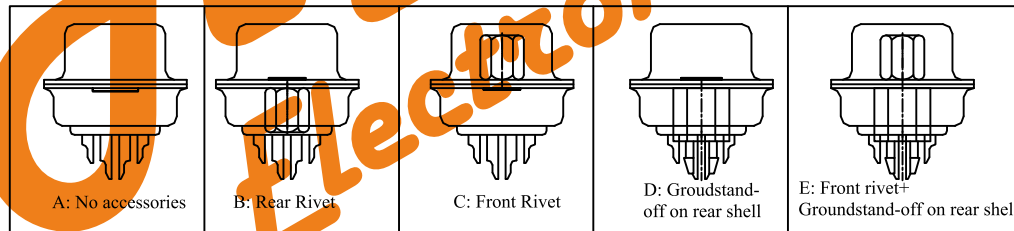
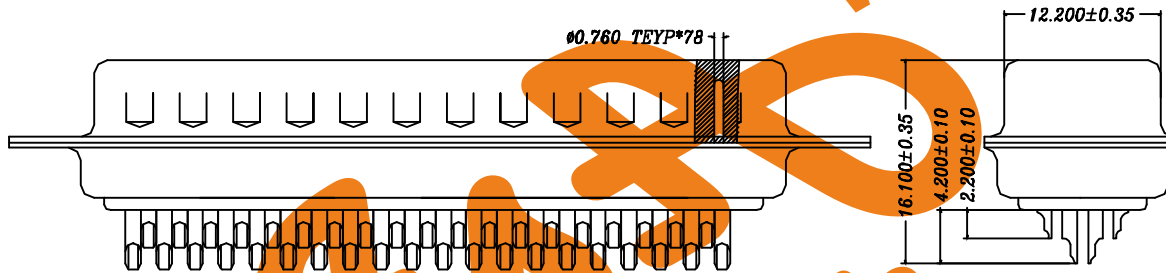


ROHS COMPLIANT

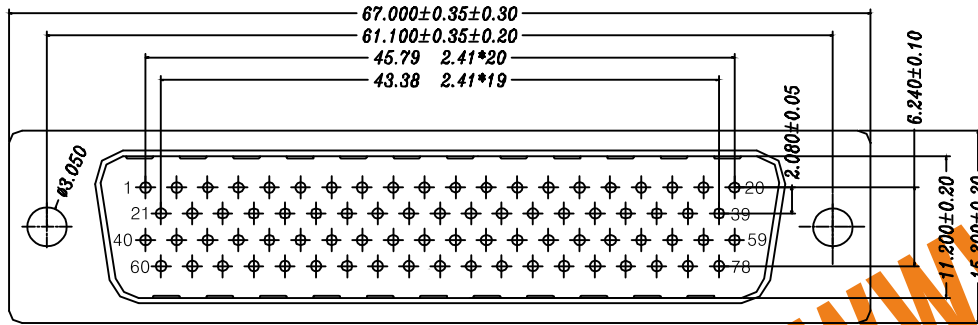

MATERIALS AND FINISH


SHELL: STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
 BACK SHELL NICKEL FINISHED
 INSULATOR: PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED, WHITE COLOR
 CONTACT MATERIAL: BRASS
 CONTACT FINISH: FULL 2u" GOLD

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN
 TEMPERATURE RATING : -55°C ~ +105°C

Ordering Code:

MHDB01 - M - X - X - X - X - X



- ① Four Row Machin Pin Solder Type
- ② Contact Type: M: Male
- ③ Contact NO.: 78=78pin
- ④ Mounting Option:
 A: No accessories
 B: Rear Rivet
 C: Front Rivet
 D: Groudstand-off on rear shell
 E: Front rivet+Groundstand-off on rear shell
- ⑤ Accessories:
 O: Non Accessories
 A: Zinc alloy 4.8mm Nickel
 A1: Zinc alloy 5.8mm Nickel
 B: Iron 4.8mm Nickel
 B1: Iron 5.8mm Nickel
 C: Copper alloy 4.8mm Nickel
 C1: Copper alloy 5.8mm Nickel
 D: Copper screw 4.8mm Nickel
 D1: Copper screw 5.8mm Nickel
- ⑥ Color Code:
 W: White L: Blue
 B: Black G: Grey
- ⑦ Contact Plating
 S: Selective Gold
 G0: Gold flash G1: 3u" Gold
 G2: 5u" Gold G3: 10u" Gold
 G4: 15u" Gold G5: 30u" Gold

Unless Otherwise specified tolerance X:±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15		 WWW.AsA-Elec.com AsA Electronic Co. Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02
SCALE: 1:1	UNIT: mm	
DRAWN: huangzhen		TITLE: D-SUB Male Four Row Solder Type (stamped Pin)
CHECKED: YANG		DRAWING NO: HDD02-MXXXXX
		PRODUCT NO: HDD02-MXXXXX

REV	DESCRIPTION	DATE
	Add option of plating	13/12/20