

**ROHS COMPLIANT**




# 1.00mm Pin Header Dual Row AngleType

## SPECIFICATION

Current Rating: 1Amp  
 Insulation Resistance: 5000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:  
 PHBR02 - X - X - D - X - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating:  
 G0: Gold flash  
 G1: 3u" Gold  
 G2: 5u" Gold  
 G3: 10u" Gold  
 G4: 15u" Gold  
 G5: 30u" Gold  
 SN: Tin
- ④ Connector Type: D: Dual
- ⑤ Pin Length: A+B+1.08+D+H1/H2  
 Please mark the desired length in the A/B/D
- ⑥ Insulator Material:  
 B: PA6T  
 C: LCP  
 D: PA46
- ⑦ Packing:  
 A: Tray  
 B: Bag  
 T: Tube
- ⑧ Plastic High:  
 H1: 1.0mm  
 H2: 1.5mm

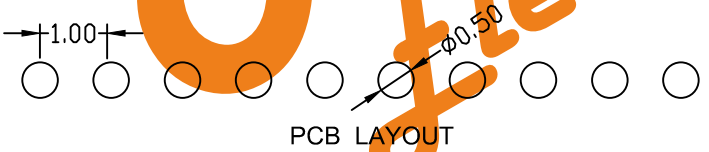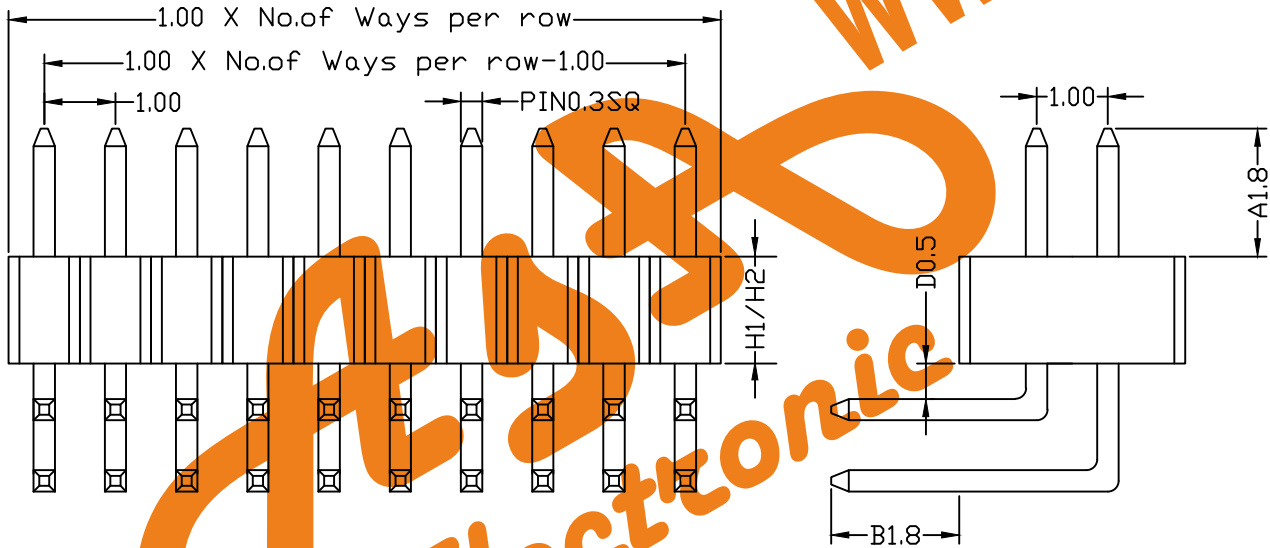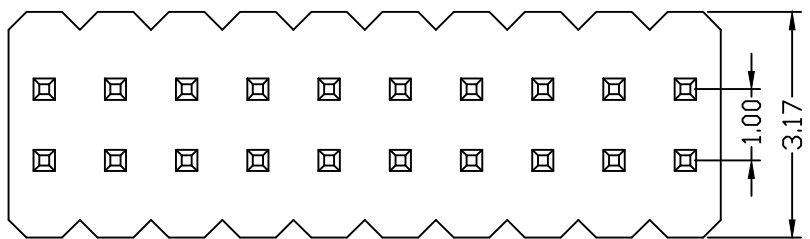

Unless Otherwise specified tolerance  
 X: ±0.35  
 X.X: ±0.25  
 X.XX: ±0.20  
 X.XXX: ±0.15


**AsA Electronic**  
 WWW.AsA-Elec.com  
 AsA Electronic Co.  
 Tel: (+98) 21 66 73 56 82 Mob: (+98) 912 03 161 02

A	B	D
1.80	1.80	0.50

SCALE: 2:1 UNIT: mm  
 DRAWN: junfon H  
 CHECKED: YANG

TITLE:  
 1.00mm Pin Header Dual Row Angle Type

REV	DESCRIPTION	DATE
	Add option of plating	10-08-28



DRAWING NO: PHBR02-XXDXXXX  
 PRODUCT NO: PHBR02-XXDXXXX