
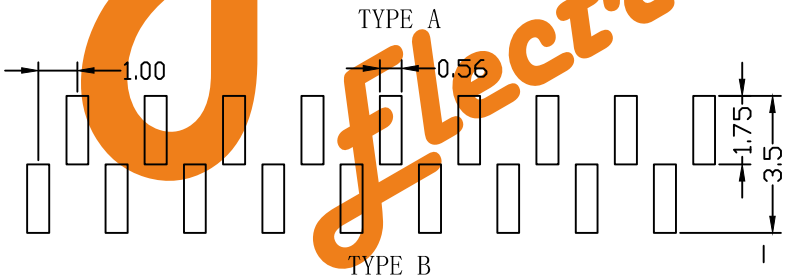
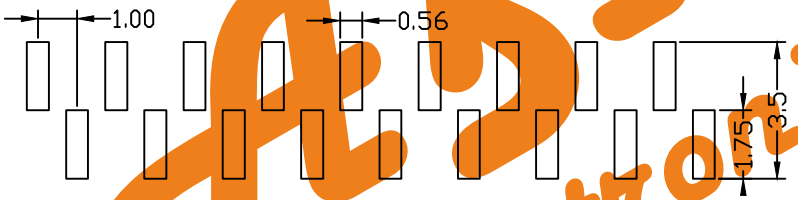
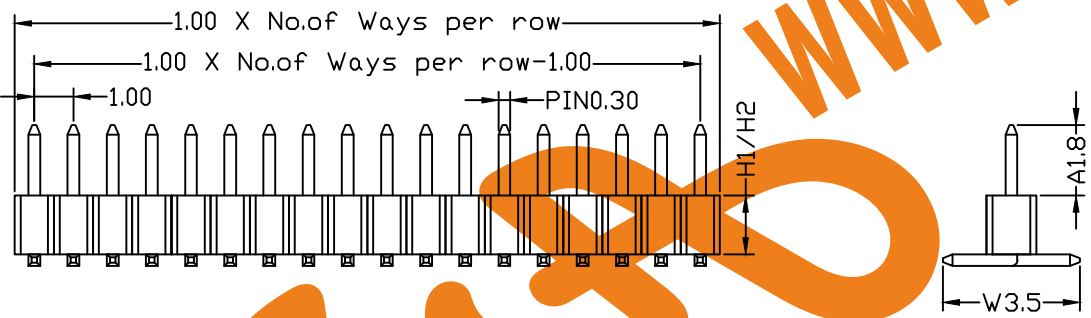
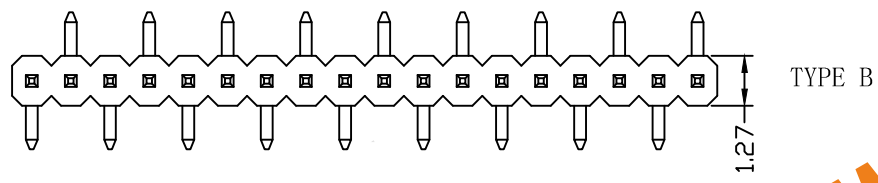


ROHS COMPLIANT

# 1.00mm Pin Header Single Row S.M.T Type

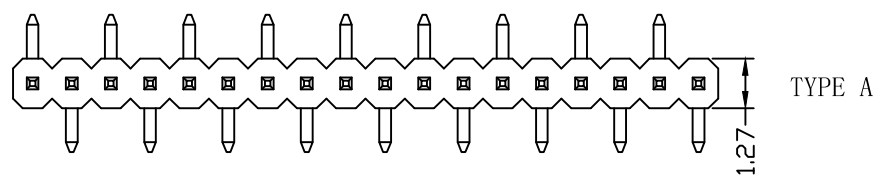

PCB LAYOUT

## SPECIFICATION

Current Rating:	1Amp
Insulation Resistance:	5000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PBT,UL 94V-0 Black

Ordering Code:

PHBM01 - X - X - S - X - X - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No:
- ② No. of Contacts  
01 To 50
- ③ Contact Plating  
G0: Gold flash  
G1: 3u" Gold  
G2: 5u" Gold  
G3: 10u" Gold  
G4: 15u" Gold  
G5: 30u" Gold  
SN: Tin
- ④ Connector Type  
S: Single
- ⑤ Pin Length:  
A+W/2+H  
Please mark the desired length in the A/W/H
- ⑥ Insulator Material  
B: PA6T  
C: LCP  
D: PA46
- ⑦ Packing  
A: Tray  
B: Bag  
T: Tube  
R: Tape&Reel
- ⑧ Special Function  
A: Type A  
B: Type B
- ⑨ Plastic High  
H1: 1.0mm  
H2: 1.5mm

Unless Otherwise specified tolerance  
 X.±0.35  
 X.X:±0.25  
 X.XX:±0.20  
 X.XXX:±0.15

SCALE: 2:1 UNIT: mm  
 DRAWN: junfon H  
 CHECKED: YANG

**AsA Electronic Co.**  
 WWW.AsA-Elec.com  
 Tel: (+98) 21 66 73 56 82 Mob: (+98) 912 03 161 02

A	W
1.80	3.50
Optional	



TITLE:  
1.00mm Pin Header Single Row SMT Type

DRAWING NO: PHBM01-XXSXXXXX  
 PRODUCT NO: PHBM01-XXSXXXXX

REV	Add option of plating			10-08-28
1	2	3	4	5
DESCRIPTION				