

ROHS COMPLIANT

1.27mm Pin Header Dual Row Double Plastic Straight Type



SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHCS08 - X - X - D - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating: G0: Gold flash, G1: .3u" Gold, G2: .5u" Gold, G3: .10u" Gold, G4: .15u" Gold, G5: .30u" Gold, SN: Tin
- ④ Connector Type: D: Dual
- ⑤ Pin Length: A+B+C. Please mark the desired length in the A/B
- ⑥ Insulator Material: B: PA6T, C: LCP, D: PA46
- ⑦ Packing: A: Tray, B: Bag, T: Tube
- ⑧ Plastic High: H1: 1.6mm, H2: 2.0mm, H3: 2.5mm

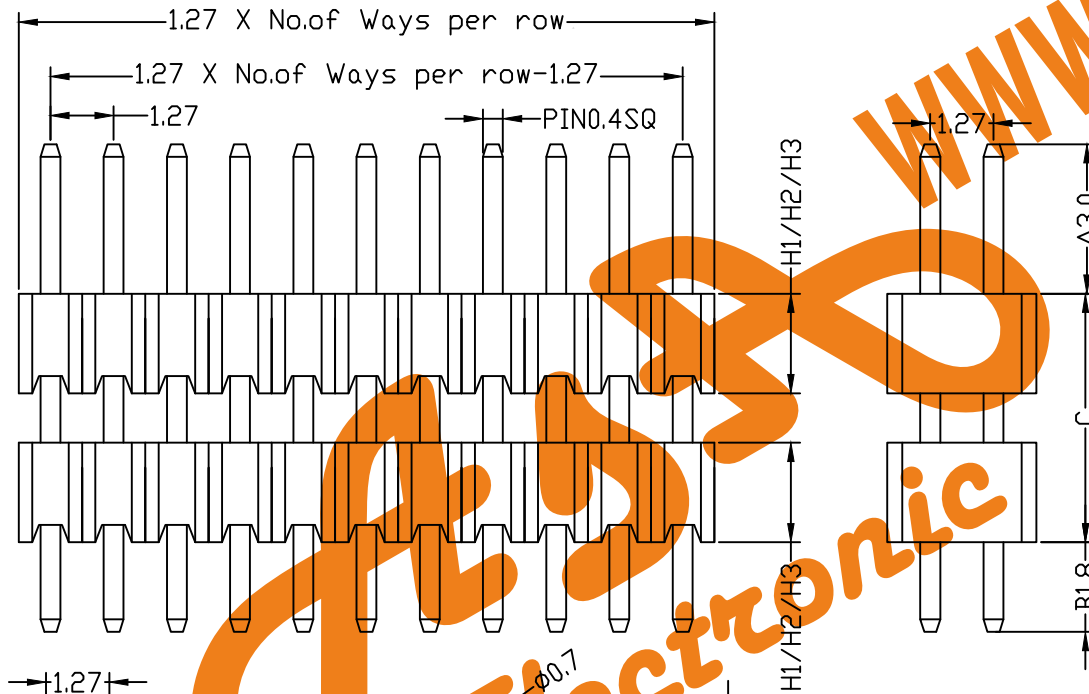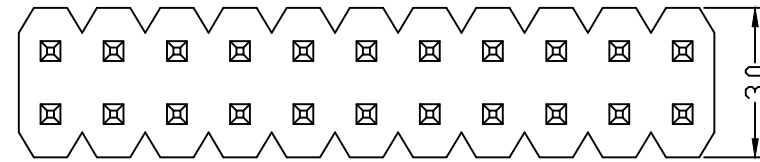

PCB LAYOUT


A	B	C
3.0	1.8	
Optional		

Unless Otherwise specified tolerance
 SCALE: As Shown
 UNIT: mm

AsA Electronic Co.
 WWW.AsA-Elec.com
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

DRAWN: junfon H
 CHECKED: YANG

TITLE:
 1.27mm Pin Header Dual Row Double Plastic Straight Type



DRAWING NO: PHCS08-XXDXXXX
 PRODUCT NO: PHCS08-XXDXXXX

REV	Add option of plating	10/8/1	
	DESCRIPTION	DATE	