

ROHS COMPLIANT

1.27mm Pin Header Dual Row Anlge Type



SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHCR08 - X - X - D - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts 02 To 100
- ③ Contact Plating
 G0: Gold flash
 G1 :3u" Gold
 G2 :5u" Gold
 G3 :10u" Gold
 G4 :15u" Gold
 G5 :30u" Gold
 SN: Tin
- ④ Connector Type
 D: Dual
- ⑤ Pin Length:
 $A+B+D+0.87+H1/H2$
 Please mark the desired length in the A/B
- ⑥ Insulator Material
 B: PA6T
 C: LCP
 D: PA46
- ⑦ Packing
 A: Tray
 B: Bag
 T: Tube
- ⑧ Plastic High
 H1: 1.6mm
 H2: 2.0mm
 H3: 2.5mm

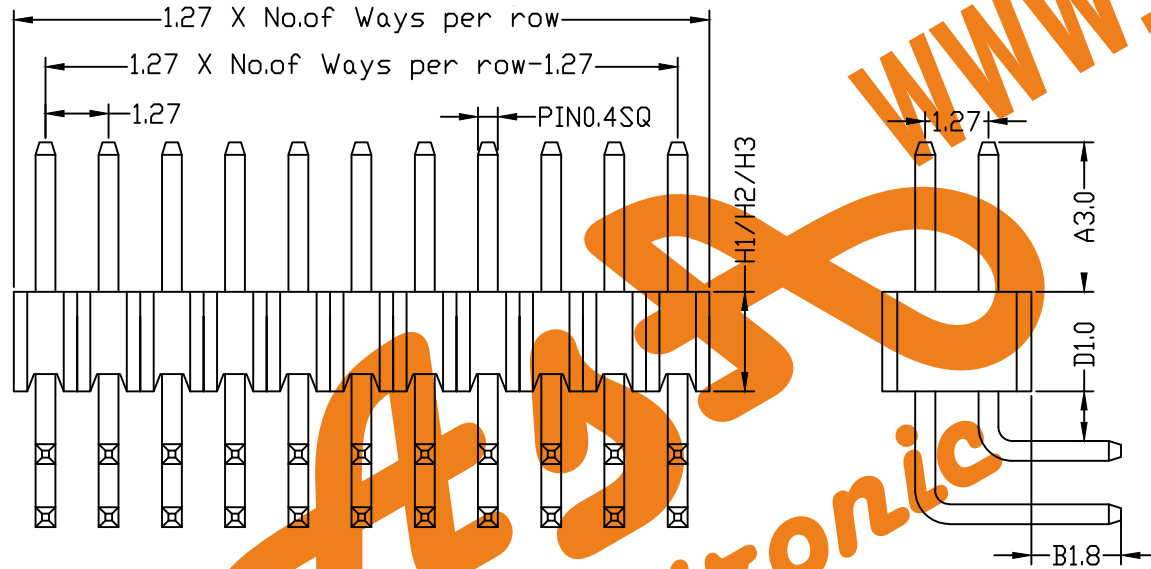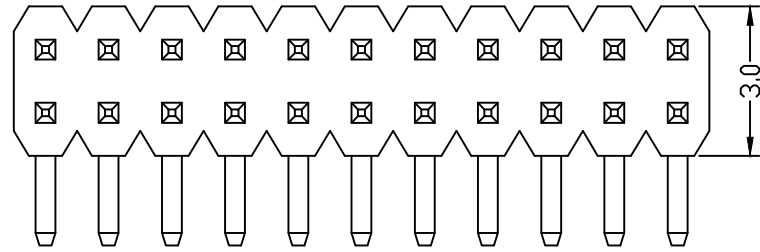

PCB LAYOUT

A	B	D
3.0	1.8	1.0

Optional

Unless Otherwise specified tolerance

SCALE: As Shown
 UNIT: mm

DRAWN: junfon H

CHECKED: YANG



ASA WWW.ASA-Elec.com
Electronic
AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

TITLE:
 1.27mm Pin Header Dual Row Angle Type

DRAWING NO: PHCR08-XXDXXXX

PRODUCT NO: PHCR08-XXDXXXX

REV	Add option of plating	10/8/1
	DESCRIPTION	DATE