

ROHS COMPLIANT

1.27mm Pin Header Single Row Straight Type H1.7/2.5




SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0
 Standard:PBT,UL94V-0 Black

Ordering Code:

PHCS03 - X - X - S - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts 01 To 50
- ③ Contact Plating
 G0: Gold flash
 G1 :3u" Gold
 G2 :5u" Gold
 G3 :10u" Gold
 G4 :15u" Gold
 G5 :30u" Gold
 SN: Tin
- ④ Connector Type
 S:Single
- ⑤ Pin Length:
 A+B+H1/H2
 Please mark the desired length in the A/B
- ⑥ Insulator Material
 B:PA6T
 C:LCP
 D:PA46
- ⑦ Packing
 A:Tray
 B:Bag
 T:Tube
- ⑧ Plastic High
 H1:1.7mm
 H2:2.5mm

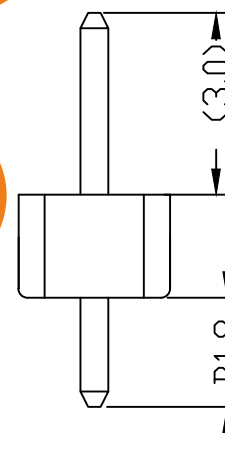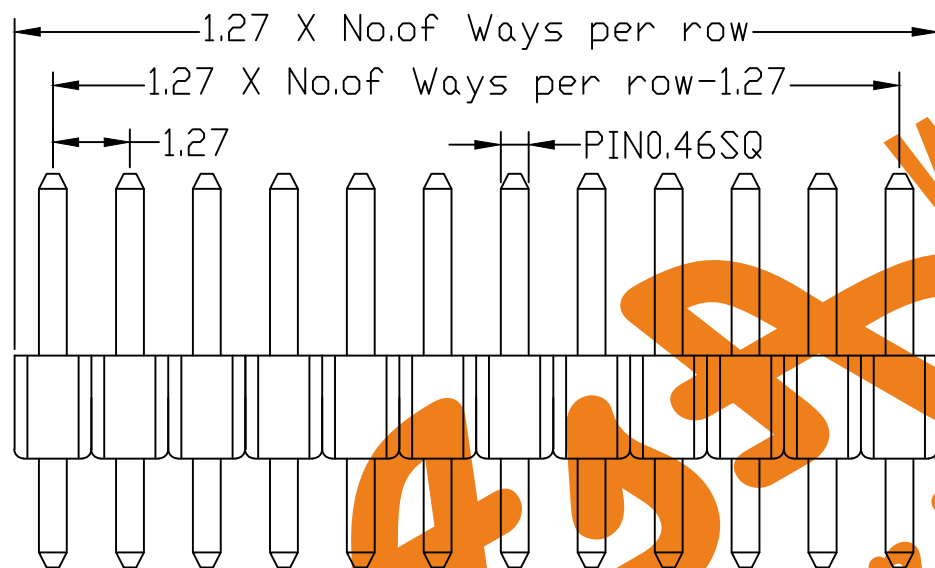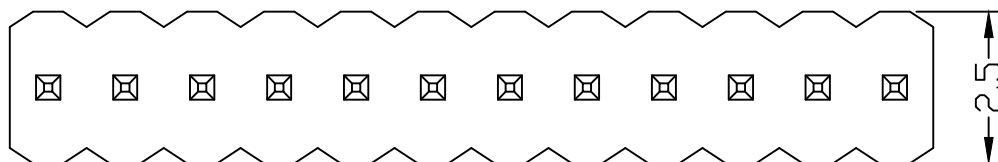

PCB LAYOUT

A	B
3.0	1.8
Optional	

Unless Otherwise specified tolerance
 SCALE: As Shown
 UNIT: mm

ASA Electronic WWW.ASA-Elec.com
ASA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

DRAWN: junfon H
 CHECKED: YANG

TITLE:
 1.27mm Pin Header Single Row Straight Type
 DRAWING NO: PHCS03-XXSXXXX
 PRODUCT NO: PHCS03-XXSXXXX

REV	Add option of plating	10/8/1
	DESCRIPTION	DATE