
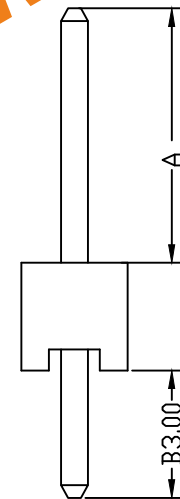
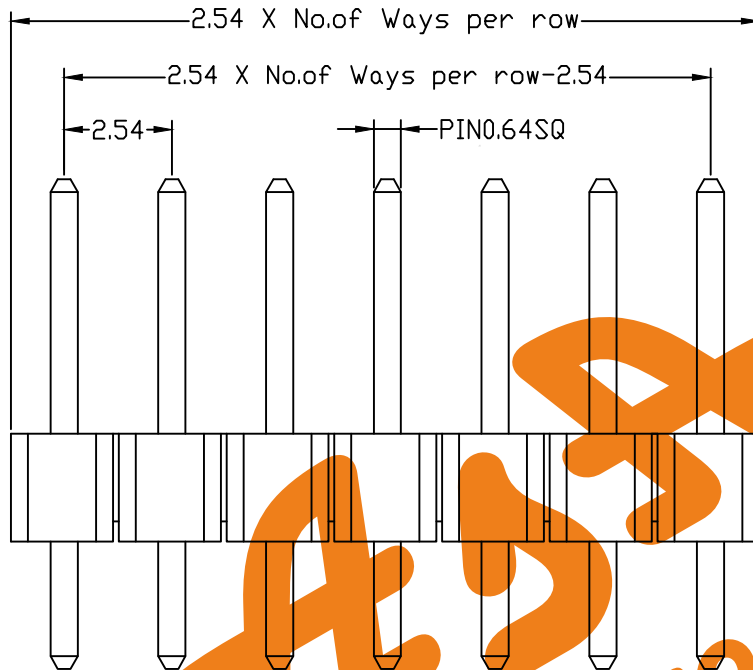


ROHS COMPLIANT

2.54mm Pin Header Straight Type Single Row

SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black



Ordering Code:

PHE01 - X - X - S - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 01 To 40
- ③ Contact Plating: G0: Gold flash, G1: 3u" Gold, G2: 5u" Gold, G3: 10u" Gold, G4: 15u" Gold, G5: 30u" Gold, SN: Tin
- ④ Connector Type: S: Single
- ⑤ Pin Length: A+B+H1/H2
- ⑥ Insulator Material: A: PBT, B: PA6T, S: SPECIAL
- ⑦ Packing: A: Tray, B: Bag, T: Tube
- ⑧ Plastic High: H1: 1.7mm, H2: 2.54mm

A = 5,6,7,8,9,...,33,34



PCB LAYOUT

A	B	Unless Otherwise specified tolerance	
6.0	3.0	X.±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15	
Optional		SCALE: As Shown	UNIT: mm

AsA [WWW.AsA-Elec.com](http://www.AsA-Elec.com)
Electronic
AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

DRAWN: junfon H

CHECKED: YANG



TITLE:
2.54mm Pin Header Straight Type Single Row

DRAWING NO: PHE01-XXSXXXX

PRODUCT NO: PHE01-XXSXXXX

REV	Add option of plating	10/8/1
	DESCRIPTION	DATE