
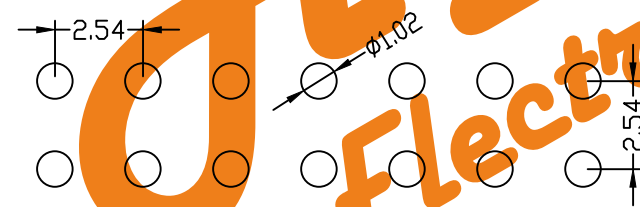
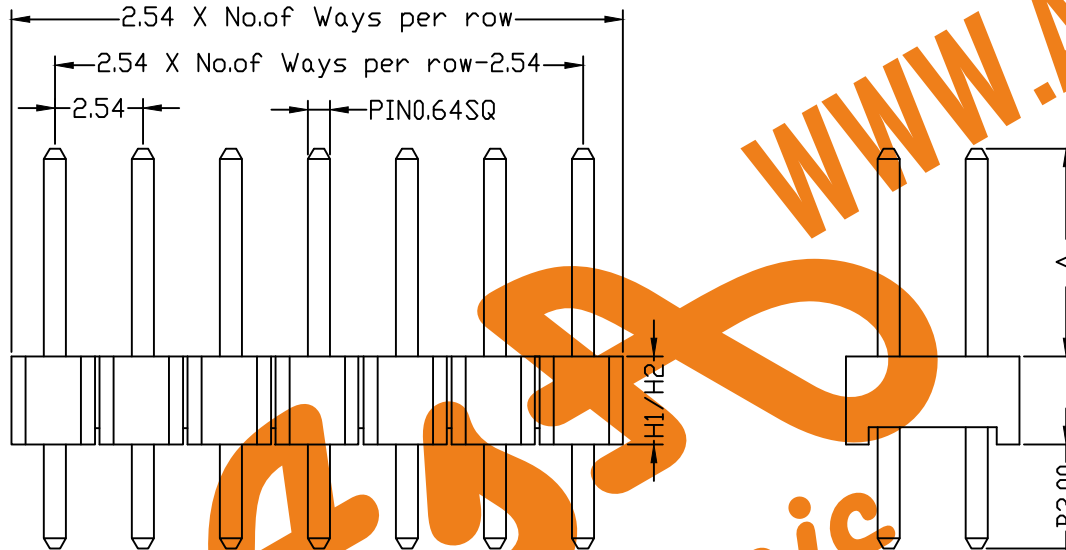


ROHS COMPLIANT

2.54mm Pin Header Dual Row Straight Type

SPECIFICATION

Current Rating: 3Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

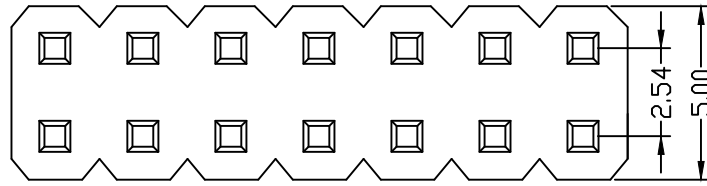

PCB LAYOUT

Ordering Code:

PHES04 - X - X - D - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 02 To 80
- ③ Contact Plating: G0: Gold flash, G1: 3u" Gold, G2: 5u" Gold, G3: 10u" Gold, G4: 15u" Gold, G5: 30u" Gold, SN: Tin
- ④ Connector Type: D: Dual
- ⑤ Pin Length: A+B+H
- ⑥ Insulator Material: A: PBT, B: PA6T, C: LCP, D: PA46
- ⑦ Packing: A: Tray, B: Bag, T: Tube
- ⑧ Plastic High: H1: 1.7mm, H2: 2.54mm

A = 5,6,7,8,9,....,33,34

A		B		Unless Otherwise specified tolerance X.±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15	 WWW.AsA-Elec.com AsA Electronic Co. Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02
6.0	3.0	Optional			
DRAWN: junFon H				TITLE: 2.54mm Pin Header DualRow Straight Type	
CHECKED: YANG				DRAWING NO: PHES04-XXDXXXX	
DATE				PRODUCT NO: PHES04-XXDXXXX	

REV	Add option of plating	10/8/1	
	DESCRIPTION	DATE	

