

ROHS COMPLIANT

2.54mm Pin Header Single Row Double Plastic Angle Type



SPECIFICATION

Current Rating: 3 Amp  
 Insulation Resistance: 5000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHER02 - X - X - S - X - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts 01 To 40
- ③ Contact Plating  
 G0: Gold flash  
 G1: 3u" Gold  
 G2: 5u" Gold  
 G3: 10u" Gold  
 G4: 15u" Gold  
 G5: 30u" Gold  
 SN: Tin
- ④ Connector Type  
 S: Single
- ⑤ Pin Length:  
 A+B+D+C+1.27  
 Please mark the desired length in the A/B/D
- ⑥ Insulator Material  
 A: PBT  
 B: PA6T  
 C: LCP  
 D: PA46
- ⑦ Packing  
 A: Tray  
 B: Bag  
 T: Tube
- ⑧ Plastic High  
 H1: 1.7mm  
 H2: 2.54mm

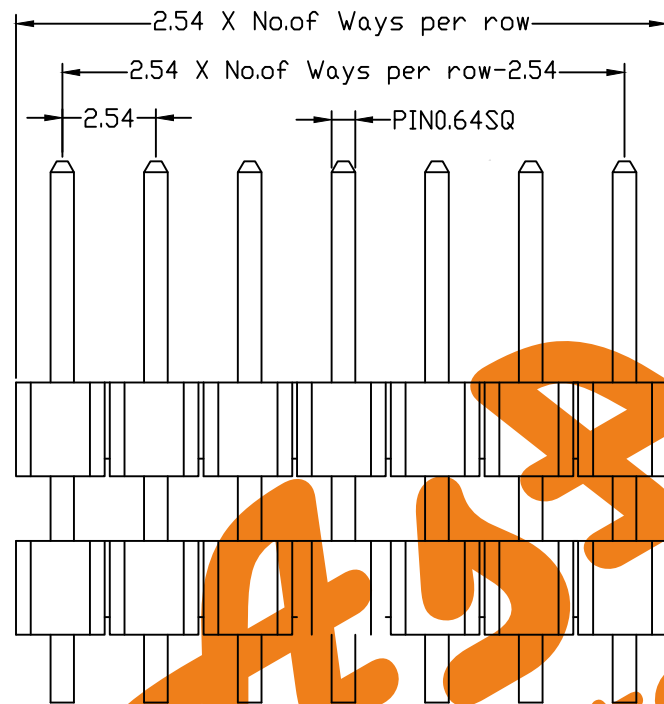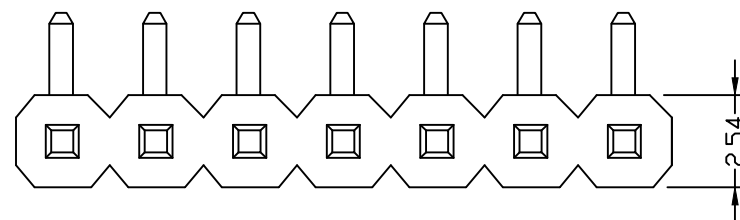


A	B	D	C
6.0	3.0	1.2	
Optional		Optional	

Unless Otherwise specified tolerance  
 X: ±0.35  
 X.X: ±0.25  
 X.XX: ±0.20  
 X.XXX: ±0.15

SCALE: As Shown  
 UNIT: mm

**AsA** [WWW.AsA-Elec.com](http://WWW.AsA-Elec.com)  
*Electronic*  
**AsA Electronic Co.**  
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

DRAWN: junfon H  
 CHECKED: YANG



TITLE:  
 2.54mm Pin Header SingleRow DoublePlastic Angle Type

DRAWING NO: PHER02-XXSXXXX  
 PRODUCT NO: PHER02-XXSXXXX

REV	Add option of plating	11/8/1
	DESCRIPTION	DATE