

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C


Temperature Range: -40°C to+105°C

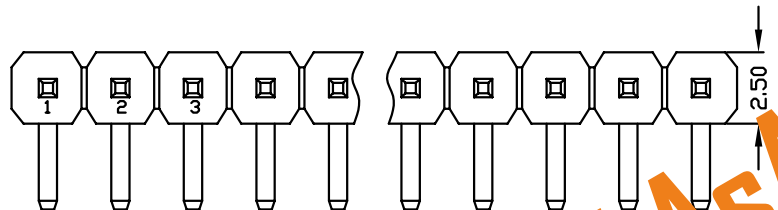

Ordering Information

P1XX-11 XX XX X R XXX X 1

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Full. Of Gold	Plating Semi-gold	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
15:1.5mm	4	A0=30u"	B0=0.8u"	A:PBT		
17:1.7mm		A1=10u"	B1=1U"	B:PA6T		
20:2.0mm		A2=1.5u"	B2=1.5U"	C:PA9T		
25:2.5mm		A3=2u"	B3=2U"	D:LCP		
		A4=3u"	B4=3U"			
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				



ITEM	A	B	H		D			
Standard	3.0	6.0	1.5	1.7	2.0	2.54	0.6	1.2
Alternate								

				OPERATION		SCALE	Fit	AsA Electronic Co.	
				X.X	±0.25	UNIT	MM	Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02	
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强
				X.XXX	±0.10	SHEET	1/1	CHECK	PART NO.
				Angle	±3°	PROJ.	APPROVE	TITLE:	P1XX-11XXXXXX1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE	Customer No.	2.54mm 单排针 90度 弯凹面

AsA Electronic

WWW.ASA-ELEC.COM