

ROHS COMPLIANT

1.27mm Female Header Single Row Angle Type




SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: Hi-Temp. Thermoplastic, UL 94V-0

Ordering Code:

FHCR01 - X - X - S - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts
01 To 50
- ③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin
- ④ Connector Type
S: Single
- ⑤ Plastic High:
H: 4.3
Please mark the desired length in the H
- ⑥ Insulator Material
B: PA6T
C: LCP
D: PA46
- ⑦ Packing
A: Tray
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP

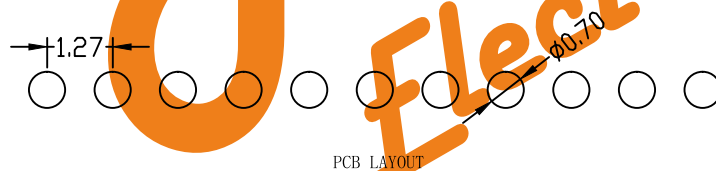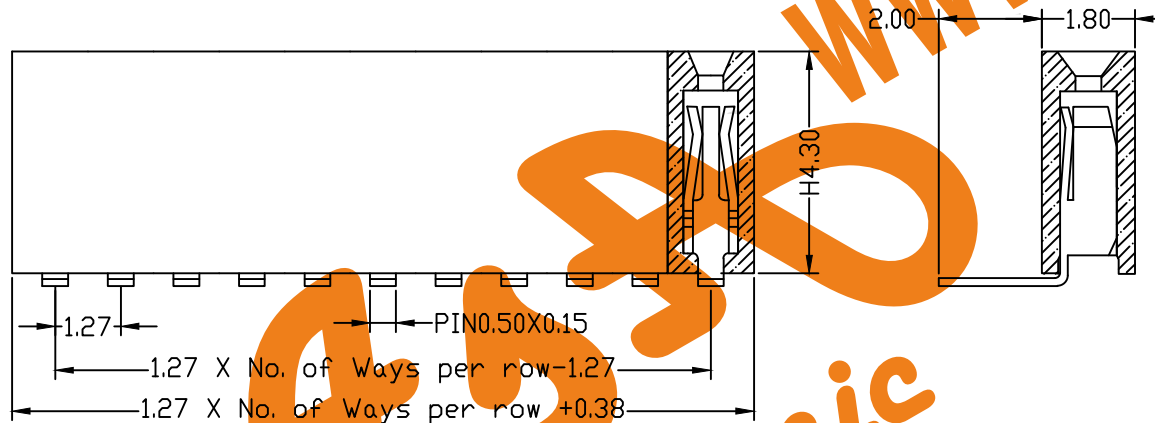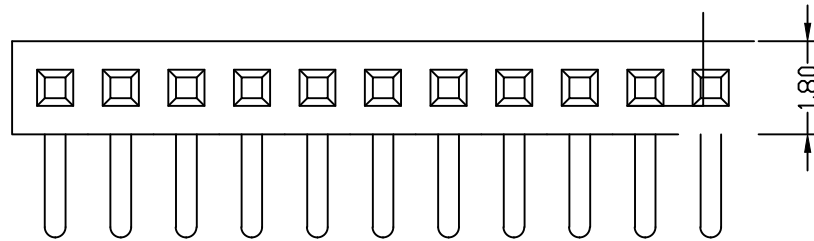

Unless Otherwise specified tolerance		 WWW.AsA-Elec.com AsA Electronic Co. Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02
X.±0.35 X.X:±0.25 X.XX:±0.20 X.XXX:±0.15		

SCALE: As Shown	UNIT: mm
--------------------	-------------

DRAWN: junfon H	TITLE: 1.27mm Female Header Single Row Angle Type
CHECKED: YANG	

 3rd ANGLE PROJECTION	DRAWING NO: FHCR01-XXSXXX
	PRODUCT NO: FHCR01-XXSXXX

REV	Add option of plating	10/8/1
	DESCRIPTION	DATE