
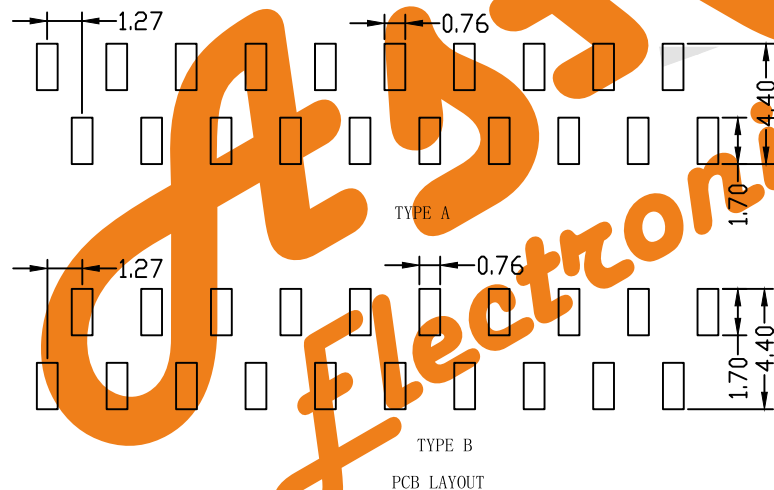

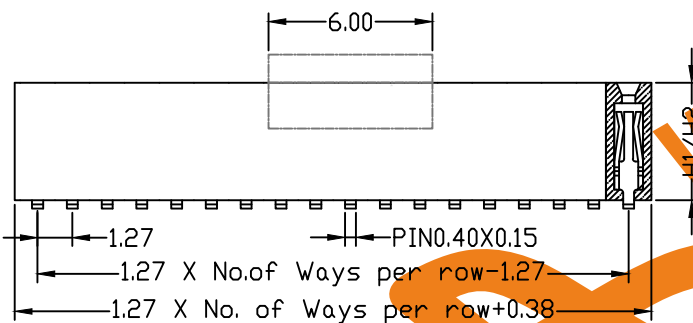


ROHS COMPLIANT

1. 27mm Female Header Single Row SMT Type (W=1.8 H=3.4, 4.3)

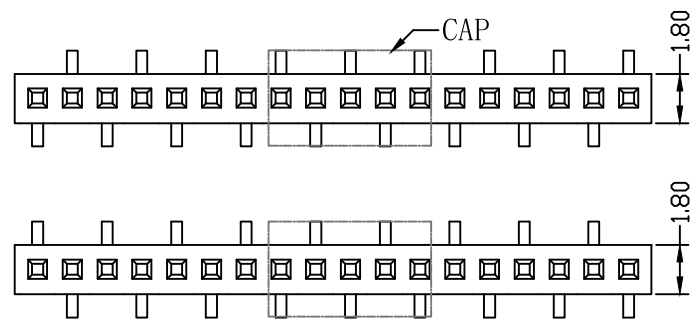

SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: Hi-Temp. Thermoplastic, UL 94V-0

Ordering Code:

FHCM02 - X - X - S - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts 01 To 50
- ③ Contact Plating
 G0: Gold flash
 G1: 3u" Gold
 G2: 5u" Gold
 G3: 10u" Gold
 G4: 15u" Gold
 G5: 30u" Gold
 SN: Tin
- ④ Connector Type
 S: Single
- ⑤ Plastic High:
 H1: 3.4 H2: 4.3
 Please mark the desired length in the H1/H2
- ⑥ Insulator Material
 B: PA6T
 C: LCP
 D: PA46
- ⑦ Packing
 A: Tray
 T: Tube
 U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP
- ⑧ Special Function
 A: Type A
 B: Type B

Unless Otherwise specified tolerance
 X.±0.35
 X.X.±0.25
 X.XX.±0.20
 X.XXX.±0.15



SCALE: As Shown
 UNIT: mm

AsA Electronic Co.
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

DRAWN: junfon H

TITLE:
 1.27mm Female Header Single Row SMT Type

CHECKED: YANG

DRAWING NO: FHCM02-XXSXXXX

PRODUCT NO: FHCM02-XXSXXXX



REV	Add option of plating	10/8/1
	DESCRIPTION	DATE