

ROHS COMPLIANT




1.27mm Female Header Dual Row Straight Type

SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: Hi-Temp. Thermoplastic, UL 94V-0

Ordering Code:
 FHCS05 - X - X - D - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 02 To 80
- ③ Contact Plating:
 G0: Gold flash
 G1: 3u" Gold
 G2: 5u" Gold
 G3: 10u" Gold
 G4: 15u" Gold
 G5: 30u" Gold
 SN: Tin
- ④ Connector Type:
 D: Dual
- ⑤ Plastic High:
 H: 2.1
 Please mark the desired length in the H
- ⑥ Insulator Material:
 B: PA6T
 C: LCP
 D: PA46
- ⑦ Packing:
 A: Tray
 T: Tube

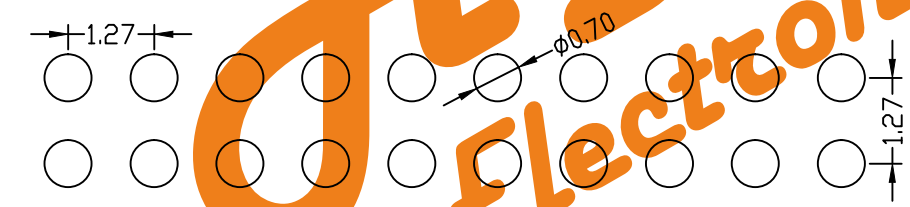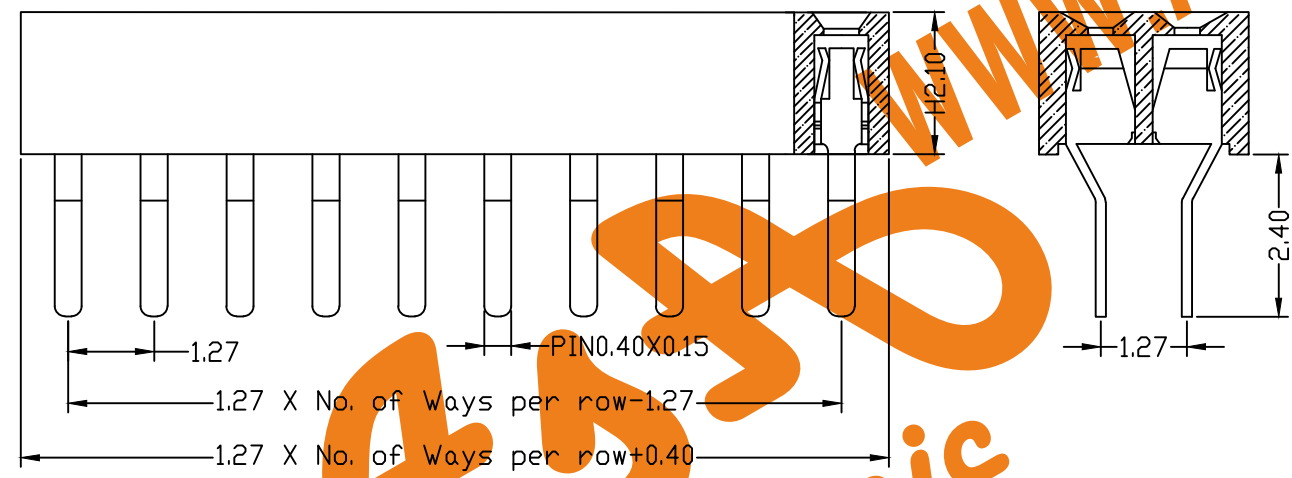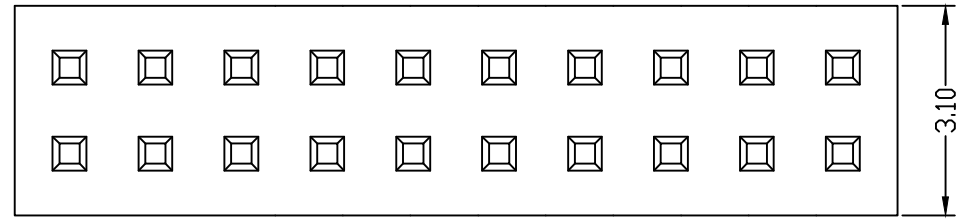


PCB LAYOUT

Unless Otherwise specified tolerance
 X.±0.35
 X.X:±0.25
 X.XX:±0.20
 X.XXX:±0.15

AsA Electronic Co.
 WWW.AsA-Elec.com
 Tel : (+98) 21 66 73 56 82 Mob : (+98) 912 03 161 02

SCALE: As Shown
 UNIT: mm

DRAWN: junfon H
 CHECKED: YANG



TITLE:
 1.27mm Female Header Dual Row Straight Type
 DRAWING NO: FHCS05-XXDXXX
 PRODUCT NO: FHCS05-XXDXXX

| | | |
|-----|-----------------------|--------|
| REV | Add option of plating | 10/8/1 |
| | DESCRIPTION | DATE |